


**PRODUCT
CATALOUGE**

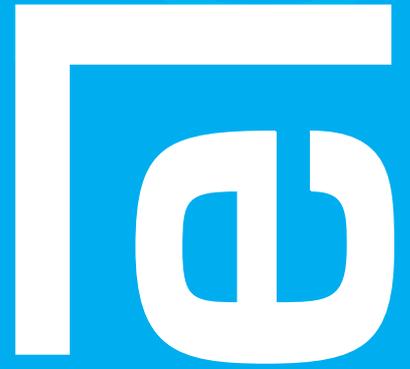

egebant[®]

www.egebant.com.tr

Rich Heritage, Strong Future



Since

1969



+ 56 Years of
Experience



+ 50 Sales
Specialist



+ 75 Dealer
Network



2 Manufacturing
Plants



1 R&D
Center



Total
Employees

+ 650

egēbant

Kocaeli
Headquarter and
Factory

egēbant

Şanlıurfa
Factory



egēbant

Global Export
Network



3 **+**
Continents

30 Countries

Şanlıurfa Factory



Kocaeli Factory & Headquarter



ABOUT US

Egebant was established in Karaköy in 1969. With its sustainable solutions, Egebant prioritises customer satisfaction at the highest level and aims to be the permanent solution partner of its customers and stakeholders. In line with this mission, it has been collaborating with globally recognised brands for many years.

Accordingly, Egebant brings the products of globally strong brands such as 3M, Honeywell, Klingspor, Naxoflex, Dynabrade, and Sicad to the Turkish market.

Guided by its core values of trustworthiness, innovation, sincerity, courage, and participation, Egebant builds long-term, trust-based relationships with its customers and stakeholders while developing flexible, tailored solutions for them.

By leveraging its manufacturing experience, which it has gained through providing services to many industry-leading brands—from the automotive sector to home appliances—Egebant continues to expand its product range with its brands, Egebant and Sander, while making investments in line with market needs.

With over 650 employees, more than 50 active sales specialists, and a widespread dealer network across Turkey, Egebant operates manufacturing facilities in Şekerpınar, Kocaeli, and Şanlıurfa. The company exports to more than 30 countries across three continents, primarily in Europe, offering a diverse range of products for various industries.

Through its customer-centric approach, Egebant conducts research and development (R&D) activities to create innovative solutions that generate value for all its customers and stakeholders.

As part of its environmental policy, Egebant effectively manages the inputs of its production processes and energy resources, developing methods to increase energy efficiency, reduce waste, and prevent pollution.

With a commitment to environmental sustainability, the company has launched a Zero Waste Project in its facilities, ensuring waste separation at the source to minimise environmental risks. Additionally, Egebant is expanding its expertise in green energy through its recycling facilities.

Moreover, to contribute to the reduction of emissions and the development of a renewable energy system, Egebant plans to generate a significant portion of the energy it consumes at its Şanlıurfa production facility through a rooftop solar power plant.

For 56 years, Egebant has been successfully growing its brands and reputation with the vision of becoming a global leader, continuously producing sustainable solutions and creating lasting value for all its stakeholders.

Finding the Right Gloves is Now Effortless!

Easily find the gloves you are looking for by using the Glove Selector on egebant.com.tr, powered by an algorithm that simplifies glove selection for various industries and needs.

The best protection is in your hands with the fastest selection!



1



Scan the QR code

2



Select the Filters You Want!

3



View the Gloves That Match Your Needs



SCAN THE QR CODE



TABLE OF CONTENTS



Protective Work Gloves

About Us.....	3
Glove Catalog Index.....	8-11
PU-Coated Cut-Resistant Gloves.....	12-17
Nitrile Foam-Coated Cut-Resistant Gloves	18-22
Uncoated Gloves.....	23
Special-Purpose Gloves.....	24
Nitrile Foam-Coated Assembly Gloves.....	25-28
EcoCycle Gloves.....	29
Oil-Resistant Work Gloves	30
PU-Coated Precision Assembly Gloves	31-34
Uncoated	34
General Work Gloves	35
Glove Standards.....	36-39
Types of Glove Coatings	40-41



Adhesive Tapes

Adhesive Tapes	42
Packaging Tapes.....	45
Masking Tapes.....	46
Duct Tape	47
Strapping Tapes.....	48
Filament Tapes	49
Aluminium Tapes	50
Double Sided Tapes	51
Film Backing Tapesr	52
Foam Tapes.....	53
Pe Freezer Tapes	54
Refrigerator Back Carton Plates.....	55
Frameless Tapes	55
Die-Cut Kiss-Cut Product	55



Abrasives

Abrasives.....	56-57
Abrasives.....	58
Belts.....	59
Velcro Discs.....	60
Foam and Sponge Sanding Pads/Discs.....	61
Flap Wheels.....	62-65
Nonwoven Flap Wheels.....	66-67
Nonwoven Rolls.....	68
Flap Discs.....	69-72
Radial Discs.....	73-75
Notes.....	76-77



egebant

SanCut

10

EN 388

EN 388:2016

CE

CE

CE

CE





PROTECTIVE
WORK GLOVES

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
PU-Coated Cut-Resistant Gloves	101744	EN388: 4X42D EN407: X1XXXX	½ Coated	HPPE & Steel Fiber & Polyester & Cotton	Polyurethane	6,7,8,9,10,11	Lining White - Black & Yellow Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	12
	131242	EN388: 4X42B EN407: X1XXXX	½ Coated	HDPE & Glass Fiber & Polyester	Polyurethane	7,8,9,10,11	Lining Grey, Coating White	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	12
	131742	EN388: 4X42B EN407: X1XXXX	½ Coated	HDPE & Glass Fiber & Polyester	Polyurethane	7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	13
	131744	EN388: 4X42D EN407: X1XXXX	½ Coated	HDPE & Steel Fiber & Polyester	Polyurethane	7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	13
	141243	EN388: 4X31A	½ Coated	HDPE & Glass Fiber & Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	14
	141743	EN388: 4X43C	½ Coated	HDPE & Glass Fiber & Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	14
	141745	EN388: 4X43E	½ Coated	HPPE & Glass Fiber & Steel Fiber & Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	14
	181242	EN388: 4X42B	½ Coated	Dyneema Diamond & Polyamide	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	15
	181743	EN388: 4X43C	½ Coated	Dyneema Diamond & Polyamide	Polyurethane	6,7,8,9,10,11	Lining Blue & White Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	15
	191732	EN388: 4X43B	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	16
	191733	EN388: 4X43C	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	16
	191734	EN388: 4X43D	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	16
	191734T	EN388: 4X43D	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	17
	191746	EN388: 3X42F	½ Coated	HPPE & Glass Fiber & Steel Fiber & Polyamide	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	17

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
Nitrile Foam-Coated Cut-Resistant Gloves	301735	EN388: 4X21E EN407: X1XXXX+ C17:C18	½ Coated	HPPE & Steel Fiber & Polyester & Cotton	Foam Nitrile	6,7,8,9,10,11	Lining White - Black & Yellow Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	18
	331334	EN388: 4X42D EN407: X1XXXX	½ Coated	HDPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining White & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	18
	331732	EN388: 4X41B EN407: X1XXXX	½ Coated	HDPE & Glass Fiber & Polyester	Foam Nitrile	7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	19
	331734	EN388: 4X42D EN407: X1XXXX	½ Coated	HDPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	19
	341734	EN388: 4X42D	½ Coated	HPPE & Glass Fiber & Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Navy Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	19
	351734	EN388: 4X31D EN407: X1XXXX	½ Coated	Steel Fiber & Aramid & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Yellow & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	20
	381632	EN388: 4X42B	½ Coated	Dyneema Diamond & Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	20
	381633	EN388: 4X42C	½ Coated	Dyneema Diamond & Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Navy Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	21
	391732	EN388: 4X43B	½ Coated	Dyneema Diamond & Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	21
	391733	EN388: 4X43C	½ Coated	HPPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	21
	391734	EN388: 4X44D	½ Coated	HPPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	22
	391734T	EN388: 4X44D	½ Coated	HPPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	22
	Uncoated Gloves	030704	EN388: 1X42D EN407: X1XXXX	Uncoated	HDPE & Steel Fiber	Uncoated	7,8,9,10,11	Lining Black & White	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60
040703		EN388: 1X41C EN407: X1XXXX	Uncoated	HDPE & Glass Fiber & Polyester & Spandex	Uncoated	7,8,9,10,11	Lining Black & White Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	23
050103		EN388: 1X43C EN407: X1XXXX	Uncoated	Aramid & Glass Fiber & Flame-Resistant Acrylic	Uncoated	6,7,8,9,10,11	Lining Yellow	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	23

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
Special-Purpose Gloves	096704	EN388: 4X44D	Uncoated	HPPE & Steel Fiber & Polyamide	Uncoated	6,7,8,9,10,11	Lining Black & White Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	24
	396734	EN388: 4X44D	½ Coated	HPPE & Steel Fiber & Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	24
Nitrile Foam-Coated Assembly Gloves	371731	EN388: 4X31A EN407: X1XXXX	½ Coated	Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Grey & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	25
	521530	EN388: 3X31A EN407: X1XXXX	½ Coated	Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Red, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	26
	521731	EN388: 4X31A EN407: X1XXXX	½ Coated	Polyamide	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	27
	571241	EN388: 4X31A EN407: X1XXXX	½ Coated	Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	27
	571331	EN388: 4131A EN407: X1XXXX	½ Coated	Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	27
	571431	EN388: 4X31A EN407: X1XXXX	½ Coated	Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Grey, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	28
	571731	EN388: 4X21X EN16350: ESD	½ Coated	Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Grey & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	28
	821740	EN388: 4X44D	½ Coated	Carbon - Polyamide & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Blue & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	28
EcoCycle Gloves	317330	EN388: 4X21X	½ Coated	Recycled Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	29
	377731	EN388: 4X31A	½ Coated	Recycled Nylon & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	29

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
Oil-Resistant Work Gloves	SanSeal 442460	EN388: 4121X	¾ Coated	Polyester	Nitrile	7,8,9,10,11	Lining Grey & Coating Blue & Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	30
	SanSeal 443460	EN388: 4121X	Fully Coated	HPPE	Nitrile	7,8,9,10,11	Lining Grey & Coating Blue & Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	30
	SanSeal 443464	EN388: 4X42D	Fully Coated	Polyester	Nitrile	7,8,9,10,11	Lining Grey & Coating Blue & Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	30
PU-Coated Precision Assembly Gloves	111220	EN388: 3X21X	½ Coated	Polyester	Polyurethane	6,7,8,9,10,11	Lining Grey & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	31
	111330	EN388: 3X21X	½ Coated	Polyester	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	31
	121220	EN388: 4X31X	½ Coated	Polyamide	Polyurethane	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	32
	121330	EN388: 4X31X	½ Coated	Polyamide	Polyurethane	6,7,8,9,10,11	Lining Grey, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	32
	121440	EN388: 4X31X	½ Coated	Polyamide	Polyurethane	6,7,8,9,10,11	Lining Red, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	32
	161330	EN388: 3X21X	½ Coated	Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	33
	166330	EN388: 1010X	½ Coated	Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	33
	721740	EN388: 4X21X EN16350 ESD	½ Coated	Carbon - Polyamide & Spandex	Polyurethane	6,7,8,9,10,11	Lining Grey, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	34
Uncoated	020200	-	Uncoated	Polyamide	Uncoated	6,7,8,9,10	Lining White	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	34
General Work Gloves	NP01 Yellow	EN388: 3X11A	¾ Coated	Cotton	Nitrile	8,9,10	Lining Ecru, Coating Blue	1st Option (Size 9 and 10) Pairs per Pack 12 Packs per Carton 24 Total Contents per Carton 288 2nd Option (Size 8, 9, and 10) Individual Packaging Total Contents per Carton 200	35
	NP01 Blue	EN388: 3X11A	¾ Coated	Cotton	Nitrile	8,9,10	Lining Ecru, Coating Yellow	1st Option (Size 9 and 10) Pairs per Pack 12 Packs per Carton 24 Total Contents per Carton 288 2nd Option (Size 8, 9, and 10) Individual Packaging Total Contents per Carton 200	35
	NP02 Yellow	EN388: 3X11A	Fully Coated	Cotton	Nitrile	8,9,10	Lining Ecru, Coating Blue	Individual Packaging Total Contents per Carton 200 (Sizes 9 and 10)	35
	NP02 Blue	EN388: 3X11A	Fully Coated	Cotton	Nitrile	8,9,10	Lining Grey, Coating Black	Individual Packaging Total Contents per Carton 200 (Sizes 9 and 10)	35
	NP03 Blue	EN388: 4111A	Fully Coated	Cotton	Nitrile	9,10,11	Lining Ecru, Coating Blue	Individual Packaging Total Contents per Carton 200 (Sizes 9 and 10)	35

SanCut Series

PU-Coated Cut-Resistant Gloves

General Properties

It is produced by coating PU on a thin and heat-resistant HPPE fiber and polyester blend lining. TDM 100 provides D level cut resistance according to ISO 13997 test. It provides a better grip on dry and slightly oily parts compared to bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.

Areas of Usage

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications.

SanCut 101744



D
CUT

 High Resistance

CE

EN 21420

EN 407

 X1XXXX

EN 388:2016

 4X42D

Coating	Polyurethane
Coating Colour	Grey
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Colour	White-Black & Yellow Melange
Gauge	13G
Thickness	1,15 mm
Size	6,7,8,9,10,11



Check it Now



General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.

Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.

SanCut 131242



B
CUT

 High Resistance

CE

EN 420

EN 407

 X1XXXX

EN 388:2016

 4X42B

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester
Liner Colour	White
Gauge	15G
Thickness	1,00 mm
Size	7,8,9,10,11



Check it Now



PU-Coated Cut-Resistant Gloves

General Properties

A cut-resistant work glove designed to withstand abrasive materials thanks to its extra-durable PU coating. Its discontinuous fiber structure allows for a secure grip on hard objects without creating pressure on the hand.

Areas of Usage

General handling, working with metal parts, material transport, rough assembly, heavy material handling.

SanCut 131742



B
CUT

High Resistance

CE

EN 420
EN 407
X1XXXX
EN 388:2016
4X42B

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	15G
Thickness	1,00 mm
Size	7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Metal Processing
- Ceramic and Glass

SanCut 131744



D
CUT

High Resistance Silicone-Free

CE

EN 21420
EN 407
X1XXXX
EN 388:2016
4X42D

Coating	Polyurethane
Coating Colour	Grey
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Metal Processing
- Ceramic and Glass

SanCut Series

PU-Coated Cut-Resistant Gloves

General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.

Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.

SanCut 141243



EN 420
EN 388:2016
4X43C

- High Resistance
- Good Fit for Hands
- Metal-Free

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Colour	White
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Metal Processing

SanCut 141743



EN 420
EN 388:2016
4X43C

- High Resistance
- Good Fit for Hands
- Metal-Free

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Metal Processing

SanCut 141745



EN 21420
EN 388:2016
4X43E

- High Resistance
- Good Fit for Hands

Coating	Polyurethane
Coating Colour	Grey
Liner	HPPE & Glass Fiber & Steel Fiber & Polyester & Spandex
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Ceramic and Glass
- Metal Processing
- Wind Energy
- Construction

PU-Coated Cut-Resistant Gloves

General Properties

Thanks to Dyneema Diamond Technology; light weight, comfortable durable and highly flexible cut resistant gloves.

Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.

SanCut 181242



B
CUT



EN 21420

EN 388:2016



4X42B



Coating	Polyurethane
Coating Colour	Grey
Liner	Dyneema Diamond & Nylon
Liner Colour	White
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check It Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Electronics



Packaging

SanCut 181743



C
CUT



EN 21420

EN 388:2016



4X43C



Coating	Polyurethane
Coating Colour	Grey
Liner	Dyneema Diamond & Nylon
Liner Colour	Blue & White Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check It Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Electronics



Packaging

SanCut Series

PU-Coated Cut-Resistant Gloves

General Properties

High fingertip sensitivity cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.

SanCut 191732



B
CUT



EN 21420

EN 388:2016



4X43B



Thin



Moderate Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Blue & White Melange
Gauge	18G
Thickness	0,70 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Furniture



Electronics



Plastic



Communication

SanCut 191733



C
CUT



EN 21420

EN 388:2016



4X43C



Thin



Moderate Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,70mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Furniture



Electronics



Plastic



Communication

SanCut 191734



D
CUT



EN 21420

EN 388:2016



4X43D



Thin



Moderate Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,75mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Furniture



Electronics



Plastic



Communication

PU-Coated Cut-Resistant Gloves

SanCut 191734T



Thin



High Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips



EN 21420

EN 388:2016



4X43D

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	15G
Thickness	0,80 mm
Size	6,7,8,9,10,11



Check it Now



Automotive



Transportation



White Goods



Aviation - Aviation



Ceramic and Glass



Metal Processing



Wind Energy

SanCut 191746



Thin



Moderate Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



High Level of Sensitivity for Fingertips



EN 420

EN 388:2016



3X42F

Coating	Polyurethane
Coating Colour	Grey
Liner	Steel Fiber & HPPE & Glass Fiber & Nylon
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Furniture



Electronics



Plastic



Communication



SanCut Series

Nitrile Foam-Coated Cut-Resistant Gloves

General Properties

It is produced by coating Foam Nitrile on a cut, abrasion and heat-resistant, HPPE fiber and polyester blend lining. TDM 100 provides E level cut resistance according to ISO 13997 test. It makes it easier to hold dry and less oily parts compared to holding with bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.

Areas of Usage

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications.

SanCut 301735



E
CUT



EN 21420

EN 407

X1XXXX

EN 388:2016

4X21E



High Resistance

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Colour	White-Black & Yellow Melange
Gauge	13G
Thickness	1,35 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation - Aviation



Metal Processing



Wind Energy



Ceramic and Glass

General Properties

Suitable for dry and slightly oily environments with a risk of cuts. Offers a comfortable working opportunity as it has a thin structure and fits well hands.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 331334



D
CUT



EN 21420

EN 407

X1XXXX

EN 388

4X42D



High Resistance



High Degree of Gripping



Compatible with Touch Screens



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Ceramic and Glass



Light Manufacturing Industry



Aviation - Aviation



Metal Processing



Construction

Nitrile Foam-Coated Cut-Resistant Gloves

SanCut 331732



B
CUT



EN 420

EN 407



EN 388



High Resistance



High Degree of Gripping



Compatible with Touch Screens



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Glass Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Ceramic and Glass



Light Manufacturing Industry



Logistics



Aviation



Metal Processing

SanCut 331734



D
CUT



EN 420

EN 407:2004



EN 388:2016



EN 16350



High Resistance



High Degree of Gripping



Compatible with Touch Screens



ESD



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Construction



Aviation



Ceramic and Glass



Metal Processing



Light Manufacturing Industry

General Properties

It is made by double-layer knitting of reinforced cut-resistant continuous filament fiber and a specially designed cut-resistant fiber. This provides extra durability in cut protection. It offers high grip and excellent mobility.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 341734



D
CUT



EN 420

EN 388:2016



4X42D



High Resistance



High Degree of Gripping



Good Fit for Hands



High Flexibility



Metal-Free



Compatible with Touch Screens



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	HPPE & Glass Fiber & Nylon
Liner Colour	Navy Blue & White Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Furniture



Ceramic and Glass



Plastic

SanCut Series

Nitrile Foam-Coated Cut-Resistant Gloves

General Properties

Combination of foam nitrile coating that has a higher degree of gripping, with aramid knit that is thin and resistant to heat and cuts.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 351734



EN 420

EN 407:2004



EN 388:2016



High Resistance



High Degree of Gripping



Good Fit for Hands



High Flexibility



Compatible with Touch Screens



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & Aramid & Polyester
Liner Colour	Yellow & Black Melange
Gauge	15G
Thickness	1,10 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Aviation



Metal Processing



Furniture



Ceramic and Glass



Solar Energy



Wind Energy

General Properties

Precision working gloves; made of dyneema liner, light, comfortable, durable and allowing for maximum mobility, higher degree of gripping, resistant to cuts.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 381632



EN 420

EN 388:2016



Ultra Lightweight



Thin



Steel-Free



Glass Fiber Free



High Degree of Gripping



Good Fit for Hands



High Flexibility



High Level of Comfort



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Dyneema Diamond & Nylon
Liner Colour	Blue & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Electronics



Packaging

Nitrile Foam-Coated Cut-Resistant Gloves

SanCut 381633



- Ultra Lightweight
- Thin
- Steel-Free
- Glass Fiber Free
- High Degree of Gripping
- Good Fit for Hands
- High Flexibility
- High Level of Comfort
- Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Dyneema Diamond & Nylon
Liner Colour	Navy Blue & White Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11



- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviation
- Metal Processing
- Electronics
- Packaging

General Properties

High grip cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 391732



- Thin
- Moderate Resistance
- Good Fit for Hands
- Compatible with Touch Screens
- High Flexibility
- Glass Fiber Free
- High Level of Sensitivity for Fingertips
- High Degree of Gripping
- ESD

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Blue & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11



- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviation
- Electronics
- Logistics

SanCut 391733



- Thin
- Moderate Resistance
- Good Fit for Hands
- Compatible with Touch Screens
- High Flexibility
- Glass Fiber Free
- High Level of Sensitivity for Fingertips
- High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11



- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviation
- Electronics
- Metal Processing

SanCut Series

Nitrile Foam-Coated Cut-Resistant Gloves

SanCut 391734



EN 420

EN 388:2016



Thin



High Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips



High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,95 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Plastic



Ceramic and Glass

SanCut 391734T



EN 420

EN 388:2016



Thin



High Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips



High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Automotive



Transportation



White Goods



Aviation - Aviation



Ceramic and Glass



Metal Processing



Wind Energy



Uncoated Gloves

General Properties

Gloves lining manufactured using cut resistant threads. High level of flexibility and permeability.

Areas of Usage

Surface control treatments, general usage, special applications

SanCut 030704



EN 420
EN 407
X1XXXX
EN 388:2016
1X42D

	Breathable		High Level of Comfort		Good Fit for Hands
Coating Uncoated					
Liner Steel Fiber & HPPE					
Liner Colour Black & White Melange					
Gauge 13G					
Thickness 0,80 mm					
Size 7,8,9,10,11					
	Automotive		Transportation		White Goods
	Aviation		Solar Energy		



Check it Now

SanCut 040703



EN 420
EN 407
X1XXXX
EN 388:2016
1X41C

	Breathable		High Level of Comfort		Good Fit for Hands
Coating Uncoated					
Liner Glass Fiber & Polyester & Spandex & HPPE					
Liner Colour Black & White Melange					
Gauge 13G					
Thickness 0,80 mm					
Size 7,8,9,10,11					
	Automotive		Transportation		White Goods
	Aviation		Solar Energy		



Check it Now

SanCut 050103



EN 21420
EN 407
X1XXXX
EN 388:2016
1X43C

	Breathable		High Level of Comfort		Good Fit for Hands
Coating Uncoated					
Liner Aramid & Glass Fiber & Flame Resistant Acrylic					
Liner Colour Yellow					
Gauge 13G					
Thickness 1,03 mm					
Size 6,7,8,9,10,11					
	Automotive		Transportation		White Goods
	Aviation		Solar Energy		



Check it Now

SanCut Series

Special-Purpose Glove

General Properties

Glove liners manufactured using cut resistant threads, with finger bottoms softened. These gloves offer a level D cut-resistance, and the finger sections are easily removable. This ensures that the finger sections are easily removed when being caught while working.

Areas of Usage

Surface control treatments, general usage, special applications.

SanCut 096704



D
CUT

CE

EN 420
EN 388:2016
4X44D



Breathable



High Level of Comfort



Good Fit for Hands

Coating Uncoated

Liner HPPE & Steel Fiber & Nylon

Liner Colour Black & White Melange

Gauge 18G

Thickness 0,60 mm

Size 6,7,8,9,10,11



Check it Now



Automotive



Transportation



White Goods



Aviation



Solar Energy

SanCut 396734



D
CUT

CE

EN 21420
EN 388:2016
4X44D



Thin



Moderate Resistance



Good Fit for Hands



Compatible with Touch Screens



High Flexibility



Glass Fiber Free



High Level of Sensitivity for Fingertips



High Degree of Gripping

Coating Foam Nitrile

Liner Steel Fiber & HPPE & Polyester

Liner Colour Black & White Melange

Gauge 18G

Thickness 1,10 mm

Size 6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Metal Processing



Plastic



Ceramic and Glass

Nitrile Foam-Coated Assembly Gloves

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, light maintenance.

SanFoam 371731



EN 21420

EN 407



X1XXXX

EN 388:2016



4X31A



High Resistance



High Level of Comfort



High Degree of Gripping



Good Fit for Hands



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Grey & Black Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



Logistics



Textile



Furniture



Aviation - Aviation



Plastic



Packaging



SanFoam Series

Nitrile Foam-Coated Assembly Gloves

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.

SanFoam 521530



EN 420

EN 407



EN 388



Thin



High Degree of Gripping



High Level of Comfort



High Resistance



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon
Liner Colour	Red
Gauge	15G
Thickness	0,80 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Logistics



Furniture



Textile



Plastic

SanFoam 521731



EN 21420

EN 407



EN 388



Lightweight



High Degree of Gripping



High Level of Comfort



Moderate Resistance



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon
Liner Colour	Black & White Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Logistics



Textile



Furniture



Aviationspace - Aviation



Plastic



Packaging

Nitrile Foam-Coated Assembly Gloves

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, light maintenance.

SanFoam 571241



EN 21420

EN 407



EN 388



4X31A



High Resistance



High Level of Comfort



High Degree of Gripping



Good Fit for Hands



Sanitized

Coating	Foam Nitrile
Coating Colour	Grey
Liner	Nylon & Spandex
Liner Colour	White
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



Logistics



Textile



Furniture



Aviationspace - Aviation



Plastic



Packaging

SanFoam 571331



EN 21420

EN 407



EN 388



4X31A



High Resistance



High Level of Comfort



High Degree of Gripping



Good Fit for Hands



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Black
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



Logistics



Textile



Furniture



Aviationspace - Aviation



Plastic



Packaging

SanFoam Series

Nitrile Foam-Coated Assembly Gloves

SanFoam 571431



EN 21420

EN 407



EN 388



4X31A



High Resistance



High Level of Comfort



High Degree of Gripping



Good Fit for Hands



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Grey
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



Logistics



Textile



Furniture



Aviation



Plastic



Packaging

SanFoam 571731



EN 21420

EN 407



EN 388



4X31A



High Resistance



High Level of Comfort



High Degree of Gripping



Good Fit for Hands



Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Grey & Black Melange
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



Logistics



Textile



Furniture



Aviation



Plastic



Packaging

General Properties

Electrostatic discharge protection featured carbon lining, ESD-certified, touch screens compatible.

Areas of Usage

Assembly of electrical/electronic components, light assembly and production lines, environments, requiring ESD protection, general handling, light maintenance.

SanFoam 821740



EN 21420

EN 388:2016



EN 16350



Lightweight



High Resistance



Compatible with Touch Screens



ESD



Good Fit for Hands



High Level of Comfort



High Level of Sensitivity for Fingertips



High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Grey
Liner	Carbon- Nylon & Spandex
Liner Colour	Blue & Black Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11



Check it Now



Light Manufacturing Industry



Automotive



Transportation



White Goods



Aviation



Solar Energy



Logistics



Electronics



Communication

General Properties

General usage gloves made with recycled yarn; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.

EcoCycle 317330



- High Resistance
- High Level of Comfort
- High Degree of Gripping
- Good Fit for Hands
- Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Recycle Polyester
Liner Colour	Black
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

-
-
-
-
-
-
-
-
-

EcoCycle 377731



- High Resistance
- High Level of Comfort
- High Degree of Gripping
- Good Fit for Hands
- Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Recycle Nylon & Spandex
Liner Colour	Green & Black Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

-
-
-
-
-
-
-
-
-

SanSeal Series

Oil-Resistant Work Gloves

General Properties

Double-layer fully coated nitrile work glove providing high resistance to cuts and abrasion in oil/liquid applications. Its special palm coating enhances grip, while the inter-finger support ensures long-term use.

SanSeal 443464



EN 420

EN 388



4X42D

- High Resistance
- Maximum Comfort
- Steel-Free
- Liquid-Proof

Coating	Nitrile
Coating Colour	Blue/Black
Liner	HPPE
Liner Colour	Grey
Gauge	15G
Thickness	1,75 mm
Size	7-8-9-10-11



Check it Now

- Metal Processing
- Automotive
- Press Operations
- Handling Sharp-Edged Parts
- Assembly Maintenance
- Glass Handling
- Petrochemical
- Mining

General Properties

Double-layer 3/4 and fully coated nitrile work glove with high palm grip capability and abrasion resistance for oil/liquid applications.

SanSeal 442460



EN 420

EN 388



4121X

- Moderate Resistance
- Maximum Comfort
- Steel-Free
- Glass Fiber-Free
- High Grip
- Liquid-Proof

Coating	Nitrile
Coating Colour	Blue/Black
Liner	Polyester
Liner Colour	Grey
Gauge	15G
Thickness	1,40 mm
Size	7-8-9-10-11



Check it Now

- Metal Processing
- Automotive
- Assembly Maintenance
- Port Operations
- Logistics
- Mining
- Construction
- Agriculture

SanSeal 443460



EN 420

EN 388



4121X

- Moderate Resistance
- Maximum Comfort
- Steel-Free
- Glass Fiber Free
- High Grip
- Liquid-Proof

Coating	Nitrile
Coating Colour	Blue/Black
Liner	Polyester
Liner Colour	Grey
Gauge	15G
Thickness	1,40 mm
Size	7-8-9-10-11



Check it Now

- Metal Processing
- Automotive
- Assembly Maintenance
- Port Operations
- Logistics
- Mining
- Construction
- Agriculture

PU-Coated Precision Assembly Gloves

General Properties

Assembly gloves; light weight, higher fingertip sensitivity, thin structure and good fit for hands, perfect price / performance ratio.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly of small parts.

SanFit 111220



- Lightweight
- Moderate Resistance
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	White
Liner	Polyester
Liner Colour	White
Gauge	13G
Thickness	0,80 mm
Size	6,7,8,9,10,11



Check it Now

- Furniture
- Textile
- Plastic
- Pharmaceutical
- White Goods
- Automotive
- Transportation

SanFit 111330



- Lightweight
- Moderate Resistance
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Polyester
Liner Colour	Black
Gauge	13G
Thickness	0,80 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Logistics
- Furniture
- Textile
- Plastic

SanFit Series

PU-Coated Precision Assembly Gloves

General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly small parts.

SanFit 121220



CE
EN 420
EN 388
4X31X

- High Level of Comfort
- High Resistance
- Silicone-Free
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	White
Liner	Nylon
Liner Colour	White
Gauge	13G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Furniture
- Textile
- Plastic
- Pharmaceutical
- White Goods
- Automotive
- Transportation

SanFit 121330



CE
EN 420
EN 388
4X31X

- High Level of Comfort
- High Resistance
- Silicone-Free
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Nylon
Liner Colour	Black
Gauge	13G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Logistics
- Furniture
- Textile
- Plastic

SanFit 121440



CE
EN 420
EN 388
4X31X

- High Level of Comfort
- High Resistance
- Silicone-Free
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Grey
Liner	Nylon
Liner Colour	Grey
Gauge	13G
Thickness	0,90 mm
Size	6,7,8,9,10,11



Check it Now

- Light Manufacturing Industry
- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Logistics
- Furniture
- Textile
- Plastic

PU-Coated Precision Assembly Gloves

General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, comfortable, fits adaptively to hands.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance.

SanFit 161330



- High Level of Comfort
- Good Fit for Hands
- Moderate Resistance
- Silicone-Free
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Polyester & Spandex
Liner Colour	Black
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11



- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Light Manufacturing Industry
- Wind Energy
- Logistics
- Furniture
- Textile

General Properties

Working gloves; ultra-light weight, offering maximum fingertip sensitivity, easily tearable.

Areas of Usage

Light assembly works, working with small pieces and applications for which the fingertip sensitivity is very important.

SanFit 166330



- Ultra Thin
- Ultra Lightweight
- Easy Fragmentation
- Silicone-Free
- Low Resistance
- Good Fit for Hands
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Polyester & Spandex
Liner Colour	Black
Gauge	18G
Thickness	0,50mm
Size	6,7,8,9,10,11



- Automotive
- Transportation
- White Goods
- Aviationspace - Aviation
- Electronics
- Communication

SanFit Series

PU-Coated Precision Assembly Gloves

General Properties

Electrostatic discharge protection featured carbonlining, ESD-certified, touch screens compatible.

Areas of Usage

Assembly of electrical/electronic components, light assembly and production lines, ESD environments, assembly of small parts.

SanFit 721740



- Lightweight
- High Resistance
- Compatible with Touch Screens
- ESD
- Good Fit for Hands
- High Level of Comfort
- High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Grey
Liner	Carbon - Nylon & Spandex
Liner Colour	Blue & Black Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11



- Automotive
- Transportation
- White Goods
- Aviation
- Electronics
- Communication
- Light Manufacturing Industry
- Solar Energy

Uncoated

General Properties

Glove liner made of nylon yarn. Maximum mobility and breathability.

Areas of Usage

Surface inspection processes, general use, special applications.

SanFit 020200



- Lightweight
- Good Breathability
- Silicone-Free
- Low Resistance

Coating	Uncoated
Liner	Nylon
Liner Colour	White
Gauge	15G
Thickness	0,70 mm
Size	6,7,8,9,10



- Automotive
- Transportation
- White Goods
- Aviation
- Electronics
- Solar Energy
- Pharmaceutical
- Social Services

General Properties

It is produced by coating nitrile on a soft, cotton lining. It is resistant to liquid.

Areas of Usage

General handling, dry gardening works, construction and building works, general rough works.

NP01



EN 420

EN 388:2016



3X11A



Moderate Resistance



Liquid-Proof



High Level of Comfort

Coating	Nitrile
Coating Type	3/4
Coating Colour	Yellow, Blue
Liner	Cotton
Liner Colour	Ecru
Thickness	0,80 mm
Size	8,9,10



Check it Now



Heavy Industry



Mining



Agriculture



Construction

NP02



EN 420

EN 388:2016



3X11A



Moderate Resistance



Liquid-Proof



High Level of Comfort

Coating	Nitrile
Coating Type	Fully
Coating Colour	Yellow, Blue
Liner	Cotton
Liner Colour	Ecru
Thickness	0,90 mm
Size	8,9,10



Check it Now



Heavy Industry



Mining



Agriculture



Construction

NP03



EN 420

EN 388:2016



4111A



High Resistance



Liquid-Proof



Steel-Free

Coating	Nitrile
Coating Type	Fully
Coating Colour	Blue
Liner	Cotton Jersey
Liner Colour	White
Thickness	1,40 mm
Size	9,10,11



Check it Now



Metal Processing



Automotive



Pres



Construction



Heavy Part Handling



Petrochemical



Woodworking



Waste Disposal

Glove Standards



Personal Protective Equipment Regulation (EU) 2016/425

The PPE Regulation classifies personal protective equipment (PPE) into three categories based on risk levels:

Category I: PPE Protection Against Minor Risks

Includes gloves and sleeves designed to protect against minimal risks, such as superficial mechanical injuries and cleaning-related hazards. Manufacturers are allowed to self-test and certify their products.

Category II: PPE Protection Against Moderate Risks

Hand and arm protection designed to safeguard against cuts, abrasions, punctures, and tears. This category of products must undergo independent testing and be certified by an accredited notified body.

Once approved, the product will receive a CE marking from the notified body. In the EU, no PPE can be sold or used without the CE marking. The name and address of the notified body issuing the CE marking must be included in the user instructions provided with the product. Performance must be continuously monitored through testing.

Category III: PPE Protection Against Fatal or Irreversible Injuries

PPE in this category involves risks that can lead to very serious consequences, such as death or irreversible harm to health, including exposure to chemicals, hazardous biological substances, extreme temperatures, and cuts caused by chainsaws. PPE must undergo independent testing and certification in the same manner as Category II products. The quality assurance system used by the manufacturer must also be independently inspected, and the identification number of the notified body must appear next to the CE mark in the user instructions.

Continuous monitoring of performance and production processes should be carried out through product testing and factory inspections.

EN ISO 21420:2020



General Requirements for Protective Gloves

Most types of protective gloves must meet the following general requirements:

- Glove construction
- Ergonomics
- Dexterity
- Harmlessness
- Product marking and packaging information
- Sizing
- Water vapor transmission and absorption
- Electrostatic properties




EN 388:2016

Protection Against Mechanical Risks

The EN 388:2016 standard applies to protective gloves against mechanical risks. This standard is used to determine the capacity of certain types of gloves to provide protection against abrasion, cuts, tears, and punctures. It classifies and defines the resistance levels of gloves against these hazards.

- a.** Abrasion Resistance: Based on the number of cycles required to wear through the glove material.
- b.** Cut Resistance: Based on the number of cycles required to cut through the glove at a fixed speed.
- c.** Tear Resistance: Indicates the force required to tear the glove.
- d.** Puncture Resistance: Specifies the force needed to puncture the glove.
- e.** Cut Resistance (ISO 13997 Test Method) The force required to cut a sample using a specific cutting machine under defined conditions.
- f.** Impact Protection: Based on measured energy and force transmission when the glove is subjected to an impact load.

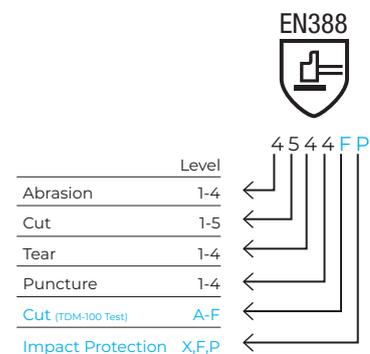

EN 407:2020



EN 407:2004



EN 407:2004

Protection Against Thermal Hazards

Scope

This standard determines the level of protection a glove provides against heat and flames. It plays a crucial role in selecting gloves for workers exposed to various heat sources and flames. The heat and flame pictogram is accompanied by a six-digit performance rating, representing the glove's resistance levels under specific thermal conditions.

The 'Heat and Flame' symbol includes six performance criteria:

- a.** Resistance to Flammability (Performance Level: 0 – 4)
- b.** Contact Heat Resistance (Performance Level: 0 – 4)
- c.** Convective Heat Resistance (Performance Level: 0 – 4)
- d.** Radiant Heat Resistance (Performance Level: 0 – 4)
- e.** Resistance to Small Splashes of Molten Metal (Performance Level: 0 – 4)
- f.** Resistance to Large Splashes of Molten Metal (Performance Level: 0 – 4)

Glove Standards



EN 511

Protection Against Cold

Scope

This European standard regulates the manufacture and sale of protective gloves resistant to thermal cold, cold air, and water. It applies to all gloves designed to protect hands against convective and contact cold down to -50°C.

Gloves providing protection against cold are tested based on three performance criteria, with results displayed under the cold protection pictogram:

- a. Resistance to Convective Cold (Performance Level: 0 – 4)
- b. Resistance to Contact Cold (Performance Level: 0 – 4)
- c. Water Penetration Resistance (Performance Level: 0 or 1)

EN 374-2



EN 374-2

Protection Against Chemicals and/or Microorganisms

The EN 374-2 standard determines a glove's ability to protect against liquid and gas permeability. This is particularly important for users handling hazardous liquids or gases, as it helps assess whether the glove can effectively prevent substance penetration. A glove's permeability resistance plays a critical role in protecting the user's skin from potential hazards.

The permeation performance of gloves defines their resistance to chemicals over a specific period. Based on EN 374-1 and EN 374-2 standards, gloves are classified according to their permeability performance, indicating how long they can protect against a specific chemical.

The EN 374-4:2013 standard evaluates how long gloves can maintain their protective properties when exposed to chemical substances. This test measures the glove's resistance duration and its ability to retain protection over time. This information is essential in determining how frequently gloves should be replaced.

The EN ISO 374-5:2016 standard assesses a glove's ability to protect against microorganisms. It measures the glove's effectiveness in reducing the number of microorganisms on its surface and interior. This is particularly crucial for users exposed to biological hazards, as it indicates how well the glove can protect against potential infections.

Requirements

Permeation resistance (EN 374-2): The penetration time must be ≥ 30 minutes for at least six chemicals listed in the table (EN 16523-1).

Permeation resistance (EN 374-2): The penetration time must be ≥ 30 minutes for at least three chemicals listed in the table (EN 16523-1)

Permeation resistance (EN 374-2): The penetration time must be ≥ 10 minutes for at least one chemical listed in the table (EN 16523-1)

For gloves providing protection against bacteria and fungi.

For gloves providing protection against bacteria and fungi.

Marking

EN ISO 374-1/ Type A



EN ISO 374-1/ Type B



EN ISO 374-1/ Type C



EN ISO 374-5



EN ISO 374-5



EN 16350



EN 16350

Test Standard for Electrostatic Properties

The EN 16350 standard defines the requirements and test methods for the electrostatic properties of protective gloves. It outlines additional requirements for gloves worn in environments where flammable or explosive atmospheres are present or may occur. This standard also provides a performance, marking, and information test method for protective gloves designed to dissipate electrostatic energy and minimize explosion risks.

It ensures that gloves protect operators in hazardous and explosive environments by preventing electrostatic discharge and its consequences. To ensure that electrostatic charges do not accumulate on the glove and are effectively transferred to the rest of the clothing for dissipation, the glove must have a sufficient level of electrical conductivity.

According to this standard, the glove's vertical electrical resistance (its ability to prevent electrostatic charge movement) must be less than 10^8 ohms. The lower the resistance value, the more conductive the glove, and thus, the lower the risk for the operator.

Glove Size and Measurement Chart

Glove Size	Hand Circumference (mm)
6	152
7	178
8	203
9	229
10	254
11	279



Glove Coating Types

Polyurethane Coating

1. Polyurethane is a thin and breathable coating that is also used in synthetic leather production.
2. It can quickly dissipate heat from the hand, helping to reduce sweating.
3. It is used in tasks where high fingertip sensitivity is essential.

Foam Nitrile Coating

1. Foam nitrile coating is oil-resistant due to the nitrile it contains.
2. Its porous structure allows breathability and makes it easier to grip oily parts.
3. The relatively thick structure of foam nitrile coating enhances comfort when handling heavy parts, acts as a cushion for the hand, and reduces pressure force.

Nitrile Coating


1. Thanks to its non-porous coating structure, it prevents mineral oils, water, and certain chemicals from penetrating the glove. For this reason, this type of coating is preferred in wet and oily work environments.
2. It can be used in dry, lightly oiled, or oily work environments.

Double Coating (Double-Dipped Nitrile Coating)

1. The first layer prevents the penetration of oil and liquids, while the second layer enhances grip, making it easier to hold oily or wet parts without slipping.
2. Suitable for use in oily and wet work environments.


GAUGE (Knitting Tightness)

1. The gauge number represents the knitting density and indicates the number of stitches per inch on the glove.
2. As the gauge number increases, the knitting tightness also increases. Common gauge numbers include 7, 10, 13, 15, 18, and 21.
3. Thin and high-durability gloves can be produced using high-gauge knitting machines.

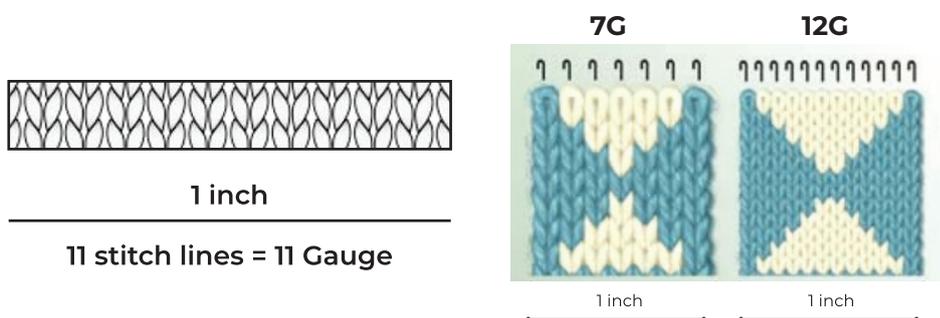

Yarns

- Cotton** Natural, comfortable, and flexible
- Polyester** Flexible, high durability, synthetic fiber
- Polyamide (Nylon)** Flexible, high durability, highly comfortable synthetic fiber
- HPPE/UHMWPE** Cut-resistant synthetic fiber
- Aramid / P. Aramid** Cut- and heat-resistant synthetic fiber
- Spandex** Used to ensure a snug fit of the glove. (Elastane)
- Metal Fiber** Auxiliary fiber that enhances cut resistance and conductivity.
- Glass Fiber** Auxiliary fiber that enhances cut resistance.
- Carbon Fiber** Auxiliary fiber that enhances conductivity.

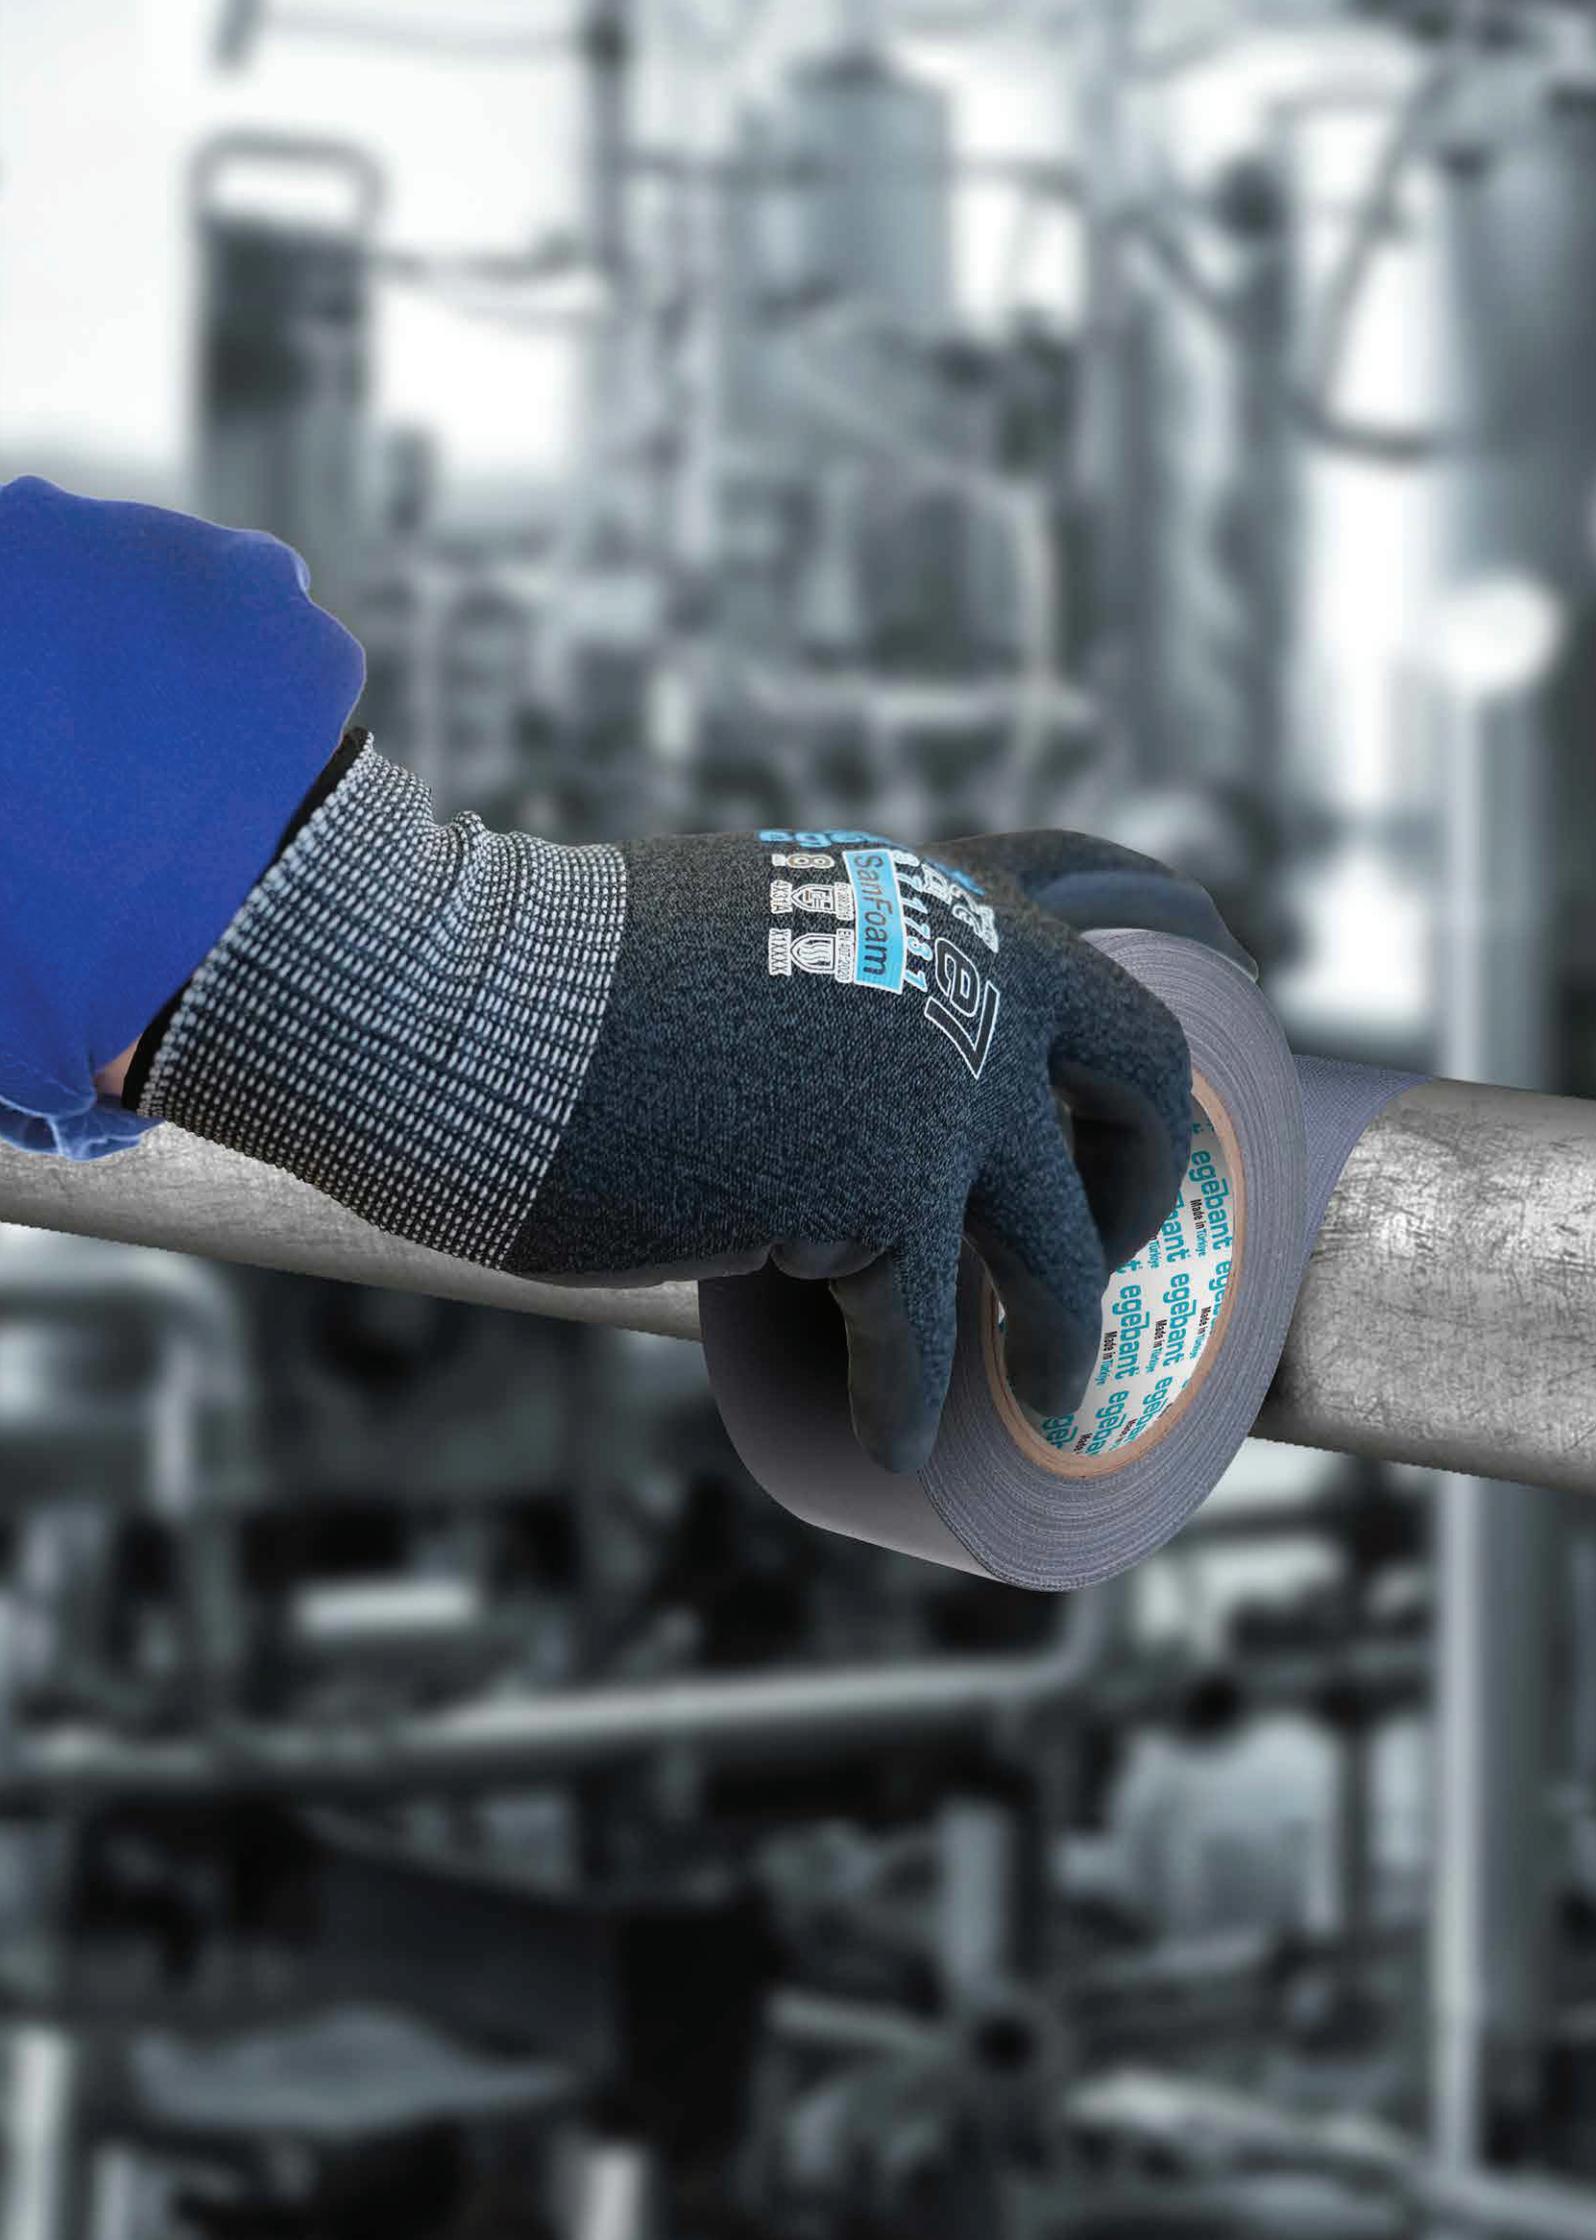



ADHESIVE
TAPES



Packaging Tapes

Product Features

- General purpose packaging tape.
- It is suitable for light and medium weight carton closure.
- Suitable for use with hand-held dispenser and automatic packaging machines
- Can be produced at any desired width and length



Product Code	Carrier	Adhesive Type	Color	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Sander PP5231	BOPP	Synthetic Rubber	Transparent / Brown / White	25 mic.	% 145	60 °C	General purpose packaging tape.
Egebant PP31	BOPP	Synthetic Rubber	Transparent / Brown / White	28 mic.	% 145	60 °C	General purpose packaging tape.
Egebant PP30S	BOPP	Natural Rubber	Transparent / Brown / White	28 mic.	% 145	60 °C	General purpose packaging tape.
Egebant PP35	BOPP	Natural Rubber	Transparent / Brown / White	35 mic.	% 145	60 °C	General purpose packaging tape.
Egebant PVC 330	PVC	Natural Rubber	Transparent / Brown / White	33 mic.	% 145	60 °C	General purpose packaging tape.
Egebant Kraft Tape	Kraft Kağıt	Natural Rubber	Brown	105 mic.	% 6	60 °C	General purpose packaging tape.



Masking Tapes

Product Features

- Can be removed without leaving a residue
- Solvent-resistant
- Temperature resistance
- Easy tear
- Controlled expansion
- Conformability to stretch and adhere round curves
- High initial adhesion



Product Code	Carrier	Adhesive Type	Thickness	Temperature Resistance (°C)	Application Areas
Sander 6127	Crepe Paper	Natural Rubber	110 mic.	30 °C	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant MSK60	Crepe Paper	Natural Rubber	125 mic.	80 (30 °C)	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant MSK6280	Crepe Paper	Natural Rubber	130 mic.	100 (30 °C)	High heat resistance, wet sanding and tiner-like chemical resistance, a general purpose masking tape. Up to 100 degree heat resistance.
Egebant MSK100	Waterproof Crepe Paper	Natural Rubber	140 mic.	120 (30 °C)	General purpose masking tape. Very high heat resistance, resistant to wet sanding and filling materials, thinner infrared light, durable and resistant to chemicals. Up to 120 degrees heat resistance
Egebant P40	PET	Silicon	60 mic.	180 (30 °C)	High-Temperature powder paint masking tape.
Egebant 6268	Crepe Green Paper	Natural Rubber	125 mic.	80 (30 °C)	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant 6265	Crepe Blue Paper	Natural Rubber	125 mic.	80 (30 °C)	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant 6267	Crepe Orange Paper	Natural Rubber	125 mic.	80 (30 °C)	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Maskopri	Paper HDPE Film	Natural Rubber	125 mic.	80 (30 °C)	The film is electrostatically loaded to stick to whole surface. Recommended for professional, industrial and DIY applications.

Duct Tapes

Product Features

- Hand-tearable
- Moisture resistant
- Can adhere to most surfaces
- High tensile strength
- Waterproof, suitable for many repair applications.



Product Code	Carrier	Adhesive Type	Color	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Egebant TPL201	PE Coated Cloth	Synthetic Rubber	Black / White / Gray	180 mic.	10	60	It is a general purpose cloth tape.
Egebant TPL204	PE Coated Cloth	Synthetic Rubber	Gray	155 mic.	13	60	It is a multi-purpose, single-sided repair tape.
Egebant CT1604	PE	Synthetic Rubber	Gray	160 mic.	10	60	General purpose cloth tape.

Strapping Tapes

Product Features

- No residue left on the surface after sticking.
- Used for strapping plastic and metal parts in White Goods Industry.
- High UV resistance.



Product Code	Carrier	Adhesive Type	Color	Thickness	Temperature Resistance (°C)	Application Areas
Egebant PP550	MOPP	Natural Rubber	White	55 mic.	60 °C	General-purpose strapping tape.
Egebant PP505	MOPP	Natural Rubber	Blue / White	70 mic	60 °C	General-purpose strapping tape.
Egebant PP850	MOPP	Natural Rubber	Blue	113 mic.	60 °C	General-purpose strapping tape.
Egebant PP855	MOPP	Natural Rubber	Blue / White	113 mic.	60 °C	General-purpose strapping tape.

Filament Tapes

Product Features

- Reinforced with glass fiber packaging and bundling tape.



Product Code	Carrier	Adhesive Type	Color	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Egebant FG10	Reinforced with fiberglass BOPP	Synthetic Rubber	Clear / White	120 mic.		60 °C	Düz örgülü, paletleme bandıdır.
Egebant FGBD	Reinforced with fiberglass BOPP	Synthetic Rubber	Clear / White	120 mic.		60 °C	Çapraz örgülü paletleme bandıdır.
Egebant ST300	MOPP	Synthetic Rubber	Clear	50 mic.		60 °C	Yiyecek ve içecek paketlerinde taşıma bandı olarak kullanılmaktadır.
Egebant GL96	Fiberglass	Silicon	White	165 mic.	% 3,5	250 °C	Yüksek sıcaklığa dayanıklı cam elyaf, bir tarafı güçlendirilmiş bez banttir.

Aluminium Tapes

Product Features

- High resistance to moisture and chemicals
- Thermal conductivity
- Heat and light reflectance
- Flame resistance
- Strength of the external environment
- Vibration damping and isolation



Product Code	Carrier	Adhesive Type	Color	Thickness	Tensile Strength	Temperature Resistance (°C)	Application Areas
Egebant AF1825	Al.Foil	Acrylic	Metallic Gray	18 mic.	40	150 °C	18 mic. Aluminium tape
Egebant AF4025	Al. Foil	Acrylic	Metallic Gray	40 mic.	40	150 °C	40 mic. Aluminium tape
Egebant AF5025	Al. Foil	Acrylic	Metallic Gray	50 mic.	40	150 °C	50 mic. Aluminium tape
Egebant AF7525	Al. Foil	Acrylic	Metallic Gray	75 mic.	60	150 °C	75 mic. Aluminium tape
Egebant TT9934	Al. Foil	Acrylic	Metallic Gray	150 mic.	275	150 °C	150 mic. Aluminium tape
Egebant TT9940	BOPP - Al. Foil	Acrylic	Metallic Gray	90 mic.	105	150 °C	It is a BOPP coated adhesive aluminium tape having high tensile strength. Used in white goods sector and aluminium panels bonding.
Egebant AF5025	VL-Al. Foil	Acrylic	Metallic Gray	90 mic.	40	120 °C	HVAC

Double Sided Tapes

Product Features

- High initial adhesion
- Easy to tear by hand
- Designed to bond to low surface energy plastic



Product Code	Carrier	Adhesive Type	Color	Thickness (mic.)	Temperature Resistance (°C)	Application Areas
Egebant TNT710	Non Woven	Synthetic Rubber	Translucent	100	60 °C	Usually laminated foam operations, cardboard, metal and adding used.
Egebant D022A	Non Woven	Acrylic	Translucent	100	120 °C	For general purposes, wood, metal, glass, paper, plastic used for welding
Egebant 6750	Non Woven	Acrylic	Blue	100	200 °C	Has a high initial adhesive strength and high-speed coil Adding used
Egebant TNT710/160	Non Woven	Synthetic Rubber	Translucent	160	60 °C	Laminated foam operations, cardboard and general purpose
Egebant VX160	Non Woven	Synthetic Rubber	Translucent	160	60 °C	Laminated foam operations, cardboard and general purpose
Egebant 90HX	Non	Acrylic	White	110	90 °C	Cross Linked Transfer Tape

Film Backing Tapes

Product Features

- Ease of use
- PVC, PET, cloth, fabric and OPP carriers
- Kinds of acrylic and rubber adhesive
- High and low surface energy good adhesion to the product
- High initial adhesion force



Product Code	Carrier	Adhesive Type	Color	Thickness (mic.)	Temperature Resistance (°C)	Application Areas
Egebant RDA700	OPP	Synthetic Rubber	Clear	98	60 °C	General purpose
Egebant PT150	PET	Modified Acrylic	Translucent	150	120 °C	Bonding of metal panels and mirrors.
Egebant PT205	PET	Modified Acrylic	Translucent	205	120 °C	Bonding of metal panels and mirrors.
Egebant D5082	PET	Acrylic	Clear	100	90 °C	General purpose
Egebant D5028	PET	Acrylic	Clear	125	90 °C	General purpose
Egebant D2040	PET	Acrylic	Clear	95	90 °C	General purpose

Foam Tapes

Product Features

- Flexibility and space-filling
- Bonding rough or irregular surfaces
- Vibration and noise isolation
- Impact resistance
- Heat resistance



Product Code	Carrier	Adhesive Type	Color	Thickness (mm)	Temperature Resistance (°C)	Application Areas
Egebant FT 67	PE Foam	Acrylic	White	1,0	90 °C	General purpose bonding solutions used in outdoor environments.
Egebant FT 67	PE Foam	Acrylic	Black	1,0	90 °C	General purpose bonding solutions used in outdoor environments.
Egebant 1100R+	Modified Acryled Foam	Acrylic	White	1,1	120 °C	General purpose bonding solutions used in outdoor environments.
Egebant 71100	Modified Acryled Foam	Acrylic	Black/White	1,1	120 °C	General purpose bonding solutions used in outdoor environments.
Egebant 640R+	Modified Acryled Foam	Acrylic	White	0,64	120 °C	General purpose bonding solutions used in outdoor environments.
Egebant 70080	Modified Acryled Foam	Acrylic	Black/Gray	0,8	120 °C	General purpose bonding solutions used in outdoor environments.
Egebant 500R	Non	Acrylic	Transparent	0,5	120 °C	General purpose bonding solutions used in outdoor environments.
Egebant 1000R	Non	Acrylic	Transparent	1,0	120 °C	General purpose bonding solutions used in outdoor environments.

Adhesive Tapes

Pe Freezer Tapes




Product Code	Carrier	Adhesive Type	Color	Thickness	Tensile Strength	Adhesive N/25mm	Application Areas
Egebant TT6405	LDPE	Syn. Rubber	White	73 mic.	28	13	Used in Evap coil winding in white goods industry. Polyurethane has a high binding capacity. Strong resistance against cold.
Egebant TT6400	LDPE	Syn. Rubber	White	85 mic.	30	20	Used in Evap coil winding in white goods industry. Polyurethane has a high binding capacity. Strong resistance against cold.

Isolation Plate

Product Features


- Adhesive laminated Polycarbonate or PVC plates, to isolate electronic components, in electronic devices.



Refrigerator Back Carton Plates

Product Features



- Aluminium and PE laminated carton for refrigerator back panels.
- Can be converted in different dimensions and shapes.

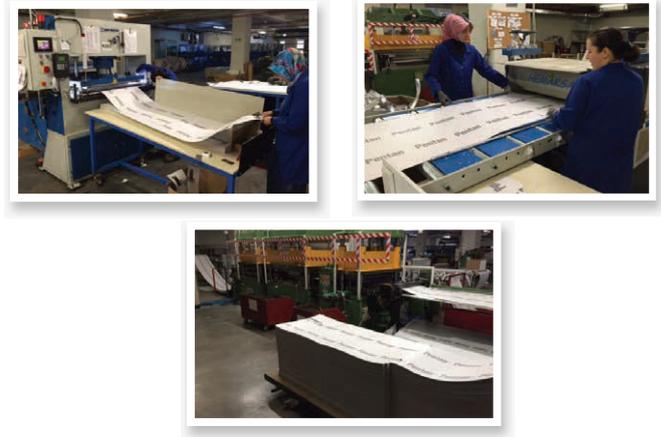

Frameless Tapes

Product Features


- Adhesive laminated Polyurethane or Silicone strips for TV production.
- Different friction and shore levels
- Can be converted into different lengths and widths.

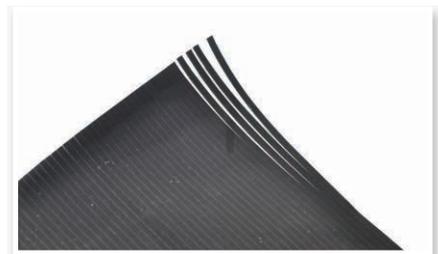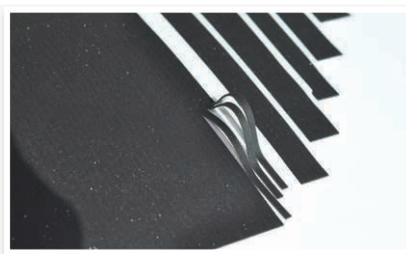

Die-Cut Kiss-Cut Product

Product Features

- Adhesive laminated foams. Die cut, kiss cut, double sided tape, Aluminium Tapes.

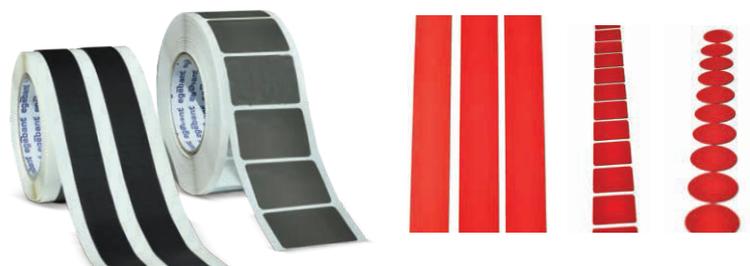





ABRASIVES

Abrasive Belts / Wide Belts

Product Features

Suitable for all sanding and grinding operations: with unsupported belt, sander pad and contact wheel

Special designs for customised applications, e.g. for furniture production to enable fast and clean preparation of large surfaces ready for painting

Wide range of sizes

Paper and cloth backed

All products with high tensile strength and optimum stretching resistance



Applications

- Steel
- Wood
- Stainless Steel
- Paint / Varnish / Filler
- NF Metal
- Plastic
- Glass

Joint Types




Grain	Backing	Coating
Aluminium Oxide	D, F, G paper	Open
Zirconia Alumina	J, JF, X, XF Cloth	Semi-Open
Ceramic Aluminium Oxide	Y, Z Polyester	Close
Silicon Carbide (SiC)	Film	

Segmented Belts

Product Features

Its strong polyester backing and sharp silicon carbide mineral provide superior performance in materials such as chipboard, MDF, HDF, and OSB.

Its special backing structure provides long life and high-performance.

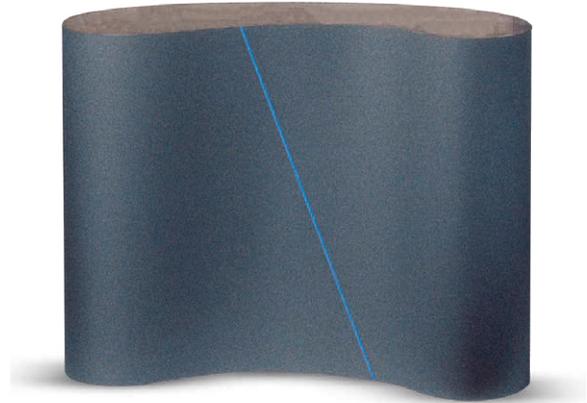

Applications

- Calibrating, intermediate sanding and finishing

Materials

- Chipboard
- OSB board MDF and HDF board

Grain	Backing	Coating	Grits
Silicon Carbide (SiC)	Y Polyester Paper	Semi-Open	24-180

Velcro / Psa Discs

Product Features


Suitable for orbital and rotary machines. These sandpapers, which have a wide range of sizes and holes, are suitable for wet and dry use, and also have cloth and film backing options.



Applications


- Steel
- Stainless Steel
- Wood
- Paint / Varnish / Filler
- Plastic
- Metals
- Glass
- Stone

Grain	Backing	Coating
Aluminium Oxide	B, C, D, E, F paper	Semi-Open
Zirconia Alumina	X, JF Cloth	Close
Ceramic Aluminium Oxide	Film	
Silicon Carbide (SiC)		




D1

9 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm




D2

8 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm




D3

6 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm




D4

8 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm




D5

8 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm



D6

8 Holes (Outside)
6 Holes (Inside)
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm



D7

8 Holes (Outside)
8 Holes (Inside)
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm
1 hole in the center

Foam and Sponge Sanding Pads/Discs

Product Features

Flexible abrasives for countered surfaces
 Due to its sponge backing, suitable for all profile surfaces



Dimension	Type	Grit Range
96x66x25 mm	Pad	60-400
96x123x12,5mm	Pad	60-400
115x140x5mm	Pad	Medium, Fine, Super Fine, Ultra Fine, Micro Fine
Diameter:150 Velcro	Flat - Perforated	Medium, Fine, Super Fine

Foam-Backed Abrasive Rolls

Product Features

High quality flexible aluminium oxide abrasive rolls.

Due to its foam backing, suitable for all surfaces.

Very good performance on most woods, paint, varnish and lacquer.



Dimension	Grit Range	Unit
115 x 25 mm	40-1500	1

Flap Wheels

Product Features

Our flap wheels are used for stock removal, finishing, etc. on flat or different forms of surfaces. It is suitable for surface sanding operations. Thanks to its flexible leaf structure, it provides high performance on all kinds of surfaces.

Applications

- Paint / Varnish / Filler
- Wood
- Plastic
- Metals



Grit	Unit / Box
100 x 50	2
100 x 100	1
150 x 30	1
150 x 50	1
165 x 30	3
165 x 50	2
200 x 50	1
250 x 50	1
300 x 30	1
300 x 50	1
350 x 50	1
350 x 100	1
380 x 75	1
410 x 30	1
410 x 50	1
410 x 100	1

Grain
P36
P40
P60
P80
P120

Grain	Backing
Aluminium Oxide	X-Cloth
Zirconia Alumina	JF Cloth

Spindle Mounted Flap Wheels

Product Features

Suitable for use on metal and wood surfaces.

Applications

- Wood
- Plastic
- Metals



Grit	Unit / Box
30 x 10 x 6	100
30 x 15 x 6	100
40 x 15 x 6	50
40 x 20 x 6	50
40 x 25 x 6	50
40 x 30 x 6	50
50 x 10 x 6	20
50 x 15 x 6	20
50 x 20 x 6	20
50 x 25 x 6	20
50 x 30 x 6	20
50 x 40 x 6	20
60 x 10 x 6	20
60 x 15 x 6	20
60 x 20 x 6	20
60 x 25 x 6	20
60 x 30 x 6	20
60 x 40 x 6	10
60 x 50 x 6	10
80 x 15 x 6	10
80 x 20 x 6	10
80 x 25 x 6	10
80 x 30 x 6	10
80 x 40 x 6	9
80 x 50 x 6	9

Grain
P36
P40
P60
P80
P120

Grain	Backing
Aluminium Oxide	X-Cloth
Zirconia Alumina	JF Cloth

Flap Wheels

Threaded Flap Wheel

Product Features

Our threaded flap wheels are used for stock removal, finishing etc. on flat or different forms of surfaces. It is suitable for surface sanding operations. Thanks to its flexible leaf structure, it provides high performance on all kinds of surfaces.

Can be used on all standard angle grinders (80 m/s).

It can be easily removed and installed without the help of any tools.



Grain	Grit	P40 - P120	Unit/Box
Aluminium Oxide		115 x 25 mm	5

Applications

- Paint
- Plastic
- Wood
- Metal

Slashed Flap Wheel

Product Features

It adapts to profiled surfaces thanks to its fringed leaves.

Applications

- Paint
- Plastic
- Wood
- Metal



Grain	Backing
Aluminium Oxide	X Cloth JF Cloth

CSD Flap Wheels

Product Features

For removing paint, varnish and rust from seams, door jambs, drip moldings, pinchwelds and other difficult-to-reach areas.

Applications

- Metal
- Paint
- Plastic



Grain	Color	Coating
Silicon Carbide (SIC)	Black	100 x 13
	Blue	150 x 13
	Purple	100 x 10 X 6
		100 x 20 X 6
		100 x 100 X 20

V-TYPE Flap Wheel

Product Features

It is suitable for sanding surfaces in corner welds and hard-to-reach spots. It is perfect for a wide range of jobs, from finishing to high stock removal, because of its wide selection of grit.

Applications

- Welding
- Metals



Grain	Backing
Aluminium Oxide Zirconia Alumina	X Cloth

Grit P40 - P120	Unit / Box
160 x 14 mm	10
160 x 20 mm	10

Nonwoven Flap Wheels

Product Features

Ideal for saturation or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface.

Applications

- Fiberglass
- Metal
- Paint
- Plastic



Combi Flap	Unit / Box
100 x 50	2
100 x 100	1
150 x 30	3
150 x 50	2
165 x 30	3
165 x 50	2
200 x 30	1
200 x 50	1
250 x 30	1
250 x 50	1
300 x 30	1
300 x 50	1
350 x 30	1
350 x 50	1
350 x 100	1
400 x 30	1
400 x 50	1
400 x 100	1

Mineral

Aluminum Oxide
Silicon Carbide (SiC)

A. Coarse	A. Medium	A. Fine	A. Very Fine
S. Medium	S. Fine	S. Very Fine	S. Ultra Fine

Spindle Mounted Nonwoven Flap Wheels

Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface. It is suitable for use with hand machines.



Spindle Mounted Nonwoven Mop	Spindle Mounted Combi-Mop	Unit / Box
40 x 20 x 6		50
50 x 20 x 6		20
50 x 30 x 6		20
60 x 15 x 6		20
60 x 30 x 6		20
80 x 40 x 6		9
80 x 50 x 6		9

Jewellery Mop	Nonwoven	Combi	Abrasive
			100 x 10
			100 x 15
			100 x 20
			100 x 30

A. Coarse	A. Medium	A. Fine	A. Very Fine
S. Medium	S. Fine	S. Very Fine	S. Ultra Fine

Nonwoven Abrasives

Nonwoven Rolls

Product Features

Suitable for hand use in surface development applications.

Nonwoven Rolls			
A.COARSE	A.	Alox	Red
A.MED	S.	Sic	Black/Gray
A.FINE	Z.	ZR	Blue
A.V.FINE	Coarse	Kaba	P100 - P120
S.MED	Medium	Medium	P180 - P220
S.FINE	Fine	Thin	P280 - P320
S.V.FINE	Very Fine	Very Thin	P320 - P360
S.U.FINE	Ultra Fine	Ultra Thin	P500 - P600
YEŞİL			



Nonwoven Discs And Sheets

Nonwoven	Sheet	Sheet	Disc Diameter	Unit / Box
A.COARSE	230 x 280	158 x 224	Ø 150	10
A.MED				
A.FINE				
A.V.FINE				
S.MED				
S.FINE				
S.V.FINE				
S.U.FINE				






Professional products with long life and high abrasion capacity.

Zirconia alumina cloth

Aggressive zirconia alumina grit.

Ceramic + Multibond

High-grade ceramic mineral with superior performance

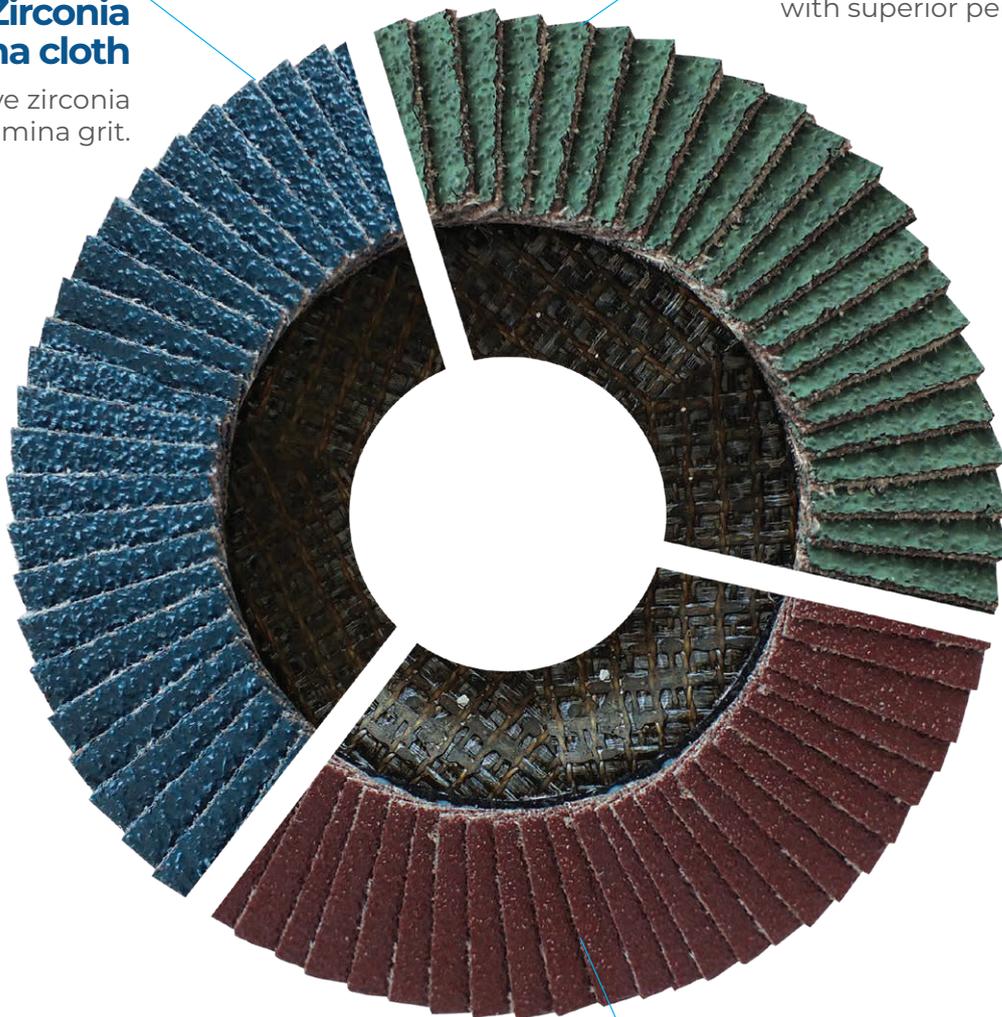

Aluminium Oxide

Durable grit aluminium oxide.

Flap Discs

Egebant Alox

Product Features

Ideal for metal surfaces and weld abrasion applications.

Applications

- Metal
- Weld



Grain	Backing Plate	Sizes
Aluminium Oxide	Glass Fibre	115 x 22 125 x 22 180 x 22

Grit
P36
P40
P60
P80
P120

Egebant ZR

Product Features

Ideal for metal surfaces and weld abrasion applications.

High stock removal performance thanks to its zirconia mineral.

Applications

- Stainless Steel



Grain	Backing Plate	Sizes
Zirconia	Glass-Fibre	115 x 22 125 x 22 180 x 22

Grit
P36
P40
P60
P80
P120

Egebant ZR Extra

Product Features

It has high abrasiveness and is durable and long-lasting. This product is especially ideal on steel and stainless steel surfaces.

Applications

- Weld
- Deburring
- Metal



Grain	Backing Plate	Sizes
Zirconia	Glass-Fibre	115 x 22
Alumina		125 x 22
		180 x 22

Grit
P36
P40
P60
P80
P120

Egebant SER

Product Features

It is long-lasting, durable, and has a high level of abrasiveness.

Applications

- Stainless Steel
- Weld
- Deburring
- Metal



Grain	Backing Plate	Sizes
Ceramic Aluminium Oxide	Glass Fibre	115 x 22
		125 x 22
		180 x 22

Grit
P36
P40
P60
P80
P120

Flap Discs

Sander Alox

Product Features

Ideal for metal surfaces and weld abrasion applications.

Applications

- Metal
- Weld



Grain	Backing Plate	Sizes
Aluminium Oxide	Glass-Fibre	115 x 22 125 x 22 180 x 22

Grit
P36
P40
P60
P80
P120

Sander ZR

Product Features

Ideal for metal surfaces and weld abrasion applications.

High stock removal performance thanks to its zirconia mineral

Applications

- Stainless Steel



Grain	Backing Plate	Sizes
Zirconia Alumina	Plastic	115 x 22
Aluminium Oxide	Glass Fibre Reinforced	125 x 22 180 x 22

Grit
P36
P40
P60
P80
P120

Radial CSD Disk

Product Features

For scraping paint and varnish, removing rust and satin used.

It is suitable for use with angle grinder machine.

Applications

- Fiberglass
- Metal
- Paint
- Plastic



Grain	Color	Sizes
Silicon Carbide (SiC)	Black	100 x 22
	Blue	115 x 22
		125 x 22
		150 x 22
		180 x 22

Radial Nonwoven Disc

Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface. It is suitable for use with angle grinder machine

Applications

- Metal



Grain	Sizes	Grit
Aluminium Oxide, Silicon Carbide (SiC)	115 x 20	A. Fine,
		A. Very Fine,
		S. Fine,
		S. Very Fine,
		S. Ultra Fine

Radial Discs

Radial Abrasive Disc

Product Features

It is used for light stock removal without leaving deep lines.

Applications

- Metals
- Stainles Steel
- Steel



Mineral	Sizws	Grit
Aluminium Oxide	115 x 22	60-400
Silicon Carbide (SiC)	125 x 22	



Quick Change Abrasives

Product Features

Easy to change used with rotary sander machines for grinding finishing and deburring on metal wood and plastics.



Diameter	Mineral	Grain	Grit	Unit / Box
30 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Elyaf	24-400	100
50 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Fiber, Elyaf	24-400	
75 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Fiber, Elyaf	24-400	
100 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Fiber, Elyaf	24-400	

Drum Abrasives

Product Features

It is suitable for use in processes such as surface development and deburring. It has a wide application area thanks to different grit sizes and sandpaper options.



egebant®

Headquarter

A: TOSB 3. Cadde No: 23 Pk. 41420

Şekerpınar, Çayırova/Kocaeli

T: +90 262 679 1313

F: +90 262 679 1300

E: info@egebant.com.tr

www.egebant.com.tr



/egebant /egebantcom /Egebant /Egebant /EgebantComTr