


**PERSONAL  
PROTECTIVE  
EQUIPMENT**



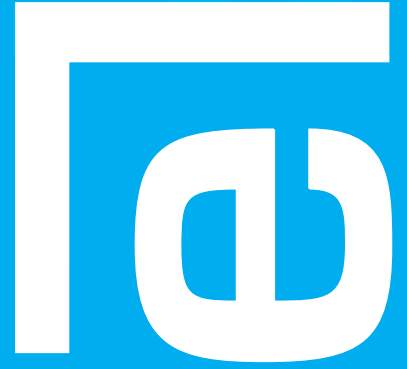

egeban

3 3 1 3 3 4  
SanCut  
EN 388  
AKA2D  
EN 407:2004  
X1XXXX

10  
SIZE



# PERSONAL PROTECTIVE EQUIPMENT

[www.egebant.com.tr](http://www.egebant.com.tr)

# General Work Gloves

## General Properties

It is produced by coating nitrile on a soft, cotton lining. It is resistant to liquid.

## Areas of Usage

General handling, dry gardening works, construction and building works, general rough works.



### SanSoft NP01 Yellow

Coating	Nitrile
Coating Form	3/4
Coating Color	Yellow
Liner	Cotton
Liner Color	Ecrü
Palm Thickness	0,80 mm



### SanSoft NP01 Blue

Coating	Nitrile
Coating Form	3/4
Coating Color	Blue
Liner	Cotton
Liner Color	Ecrü
Palm Thickness	0,80 mm



# Nitrile Coated General Work Gloves

Series **NP**



## SanSoft NP02

Coating	Nitrile
Coating Form	Complete
Coating Color	Yellow
Liner	Cotton
Liner Color	Ecru
Palm Thickness	0,80 mm



EN 388:2016



3X11A



## SanSoft NP02 Blue

Coating	Nitrile
Coating Form	Complete
Coating Color	Blue
Liner	Cotton
Liner Color	Ecru
Palm Thickness	0,90 mm



EN 388:2016



3X11A

Moderate Resistance ■ Maximum Comfort ■ Liquid Tightness



# Dry and Less Oily Applications

Series 111



## General Properties

Assembly gloves; light weight, higher fingertip sensitivity, thin structure and good fit to hands, perfect price / performance ratio

## Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly of small parts.



### SanFit 111330

Coating	Polyurethane
Coating Color	Black
Liner	Polyester
Liner Color	Black
Gauge	13G
Palm Thickness	0,80 mm



## General Properties

It is produced by coating thin, breathable and durable Polyurethane (PU) on a durable polyester lining. While protecting your hand against mechanical risks, it does not compromise fingertip sensitivity. It makes it easier to hold dry and less oily parts compared to holding with bare hands.



## Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly of small parts



### SanFit 111220

Coating	Polyurethane
Coating Color	White
Liner	Polyester
Liner Color	White
Gauge	13G
Palm Thickness	0,80 mm



### General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, comfortable, fits adaptively to hands.

### Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance




#### SanFit 161330

Coating	Polyurethane
Coating Color	Black
Liner	Polyester
Liner Color	Black
Gauge	13G
Palm Thickness	1,00 mm



#### SanFit 161240

Coating	Polyurethane
Coating Color	Grey
Liner	Polyester
Liner Color	White
Gauge	13G
Palm Thickness	1,00 mm



# PU Coated Precision Assembly Gloves

Series **121**

## General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, offering maximum comfort and durability.

## Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly small parts.



### SanFit 121220

Coating	Polyurethane
Coating Color	White
Liner	Nylon
Liner Color	White
Gauge	13G
Palm Thickness	0,90 mm



### SanFit 121330

Coating	Polyurethane
Coating Color	Black
Liner	Nylon
Liner Color	Black
Gauge	13G
Palm Thickness	0,90 mm



### SanFit 121440

Coating	Polyurethane
Coating Color	Grey
Liner	Nylon
Liner Color	Grey
Gauge	13G
Palm Thickness	0,90 mm





# PU Coated Precision Assembly Gloves

Series **166**

## General Properties

Working gloves; ultra-light weight, offering maximum fingertip sensitivity, easily tearable.



## Areas of Usage

Light assembly works, working with small pieces and applications for which the fingertip sensitivity is very important.



### SanFit 166330

Coating	Polyurethane
Coating Color	Black
Liner	Polyester & Spandex
Liner Color	Black
Gauge	18G
Palm Thickness	0,50 mm



## General Properties

Electrostatic discharge protection featured carbonlining, ESD-certified, touch screens compatible.



## Areas of Usage

Assembly of electrical/electronic components, light assembly and production lines, ESD environments, assembly of small parts.



### SanFit 721740

Coating	Polyurethane
Coating Color	Grey
Liner	Carbon- Nylon & Spandex
Liner Color	Blue & Black Melange
Gauge	18G
Palm Thickness	1,00 mm



Ultra Thin ■ Ultra Lightweight ■ Easy Fragmentation ■ Silicone-Free ■ Low Resistance ■ High Level of Comfort ■ High Resistance ■ Good Fit to Hands



High Level of Sensitivity for Fingertips ■ ESD ■ Lightweight ■ Compatible with Use on Touch Screens



# Nitrile Foam Coated Precision Assembly Gloves

## Series 371

### General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.



### Areas of Usage

General handling, packaging, material handling, light assembly and production lines, light maintenance.



#### SanFoam 371731

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Grey & Black Melange
Gauge	15G
Palm Thickness	0,90 mm



## Series 521

### General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.



### Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.



#### SanFoam 521241

Coating	Foam Nitrile
Coating Color	Grey
Liner	Nylon
Liner Color	White
Gauge	15G
Palm Thickness	0,80 mm



Lightweight ■ High Degree of Gripping ■ High Level of Comfort ■ Moderate Resistance



High Resistance ■ Good Fit to Hands



# Nitrile Foam Coated Precision Assembly Gloves

Series **521**



## SanFoam 521331

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon
Liner Color	Black
Gauge	15G
Palm Thickness	0,90 mm



## SanFoam 521431

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon
Liner Color	Grey
Gauge	15G
Palm Thickness	0,90 mm



Lightweight ■ High Degree of Gripping ■ High Level of Comfort ■ Moderate Resistance



# Nitrile Foam Coated Precision Assembly Gloves

Series **521**



## SanFoam 521731

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon
Liner Color	Black & White Melange
Gauge	15G
Palm Thickness	0,90 mm



## SanFoam 521530

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon
Liner Color	Red
Gauge	15G
Palm Thickness	0,80 mm



# Nitrile Foam Coated Precision Assembly Gloves

Series **571**

## General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort, fits adaptively to hands and durability.

## Areas of Usage

General handling, packaging, material handling, light assembly and production lines, light maintenance.



### SanFoam 571241

Coating	Foam Nitrile
Coating Color	Grey
Liner	Nylon & Spandex
Liner Color	White
Gauge	15G
Palm Thickness	1,00 mm



EN 420



X1XXXX



4X31A



### SanFoam 571331

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Black
Gauge	15G
Palm Thickness	1,00 mm



EN 420



X1XXXX



4X31A

High Resistance ■ High Level of Comfort ■ High Degree of Gripping ■ Good Fit to Hands



# Nitrile Foam Coated Precision Assembly Gloves

Series **571**



## SanFoam 571431

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Grey
Gauge	15G
Palm Thickness	1,00 mm



## SanFoam 571731

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Grey & Black Melange
Gauge	15G
Palm Thickness	1,00 mm



# Nitrile Foam Coated Precision Assembly Gloves

Series **821**

## General Properties

Electrostatic discharge protection featured carbon lining, ESD-certified, touch screens compatible.

## Areas of Usage

Assembly of electrical/electronic components, light assembly and production lines, environments, requiring ESD protection, general handling, light maintenance.



### SanFoam 821740

Coating	Foam Nitrile
Coating Color	Grey
Liner	Carbon-Nylon & Spandex
Liner Color	Blue & Black Melange
Gauge	18G
Palm Thickness	1,00 mm



EN 21420

EN 388:2016



4X21X

EN 16350



Lightweight ■ High Resistance ■ Compatible with Use on Touch Screens ■ ESD ■ Good Fit to Hands



Maximum Comfort ■ High Level of Sensitivity for Fingertips ■ High Degree of Gripping



# Uncoated Precision Assembly Gloves

## General Properties

Gloves lining made of polyamide threads high level of flexibility and permeability.

## Areas of Usage

Surface control treatments, general usage, special applications.



### SanFit 020200

Coating	Uncoated
Liner	Nylon
Liner Color	White
Gauge	15G
Palm Thickness	0,70 mm



EN 420





## General Properties

General usage gloves made with recycled yarn; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

## Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.



### Ecocycle 377731

Coating	Foam Nitrile
Coating Color	Black
Liner	Recycle Nylon & Spandex
Liner Color	Green & Black Melange
Gauge	15G
Palm Thickness	0,90 mm



### Ecocycle 317330

Coating	Foam Nitrile
Coating Color	Black
Liner	Recycle Polyester
Liner Color	Black
Gauge	15G
Palm Thickness	0,90 mm



# PU Coated Cut Resistant Gloves

## Series 101

### General Properties

It is produced by coating PU on a thin and heatresistant HPPE fiber and polyester blend lining. TDM 100 provides D level cut resistance according to ISO 13997 test. It makes it easier to hold dry and less oily parts compared to holding with bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.



### Areas of Usage

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications.



#### SanFit 101744

Coating	Polyurethane
Coating Color	Grey
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Color	White-Black & Yellow Melange
Gauge	13G
Palm Thickness	1,15 mm



## Series 131

### General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.



### Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.



#### SanCut 131242

Coating	Polyurethane
Coating Color	Grey
Liner	Glass Fiber & HPPE & Polyester
Liner Color	White
Gauge	15G
Palm Thickness	1,00mm



# PU Coated Cut Resistant Gloves

Series **131**



## SanCut 131742

Coating	Polyurethane
Coating Color	Grey
Liner	Glass Fiber & HPPE & Polyester
Liner Color	White & Black Melange
Gauge	15G
Palm Thickness	1,00mm



EN 420

EN 407:2004



X1XXXX

EN 388:2016



4X42B



## SanCut 131744

Coating	Polyurethane
Coating Color	Grey
Liner	Steel Fiber & HPPE & Polyester
Liner Color	White & Black Melange
Gauge	13G
Palm Thickness	1,00 mm



EN 420

EN 407:2004



X1XXXX

EN 388:2016



4X42D

High Resistance ■ Silicone-Free



# PU Coated Cut Resistant Gloves

## Series 141

### General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.

### Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.



#### SanCut 141243

Coating	Polyurethane
Coating Color	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Color	White
Gauge	13G
Palm Thickness	1,00mm



#### SanCut 141743

Coating	Polyurethane
Coating Color	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Color	White & Black Melange
Gauge	13G
Palm Thickness	1,00mm



#### SanCut 141745

Coating	Polyurethane
Coating Color	Grey
Liner	HPPE & Glass Fiber & Steel Fiber & Polyester & Spandex
Liner Color	White & Black Melange
Gauge	13G
Palm Thickness	1,00mm



High Resistance ■ Good Fit to Hands ■ Metal-Free



# PU Coated Cut Resistant Gloves

Series **181**

## General Properties

Thanks to Dyneema Diamond Technology; light weight, comfortable durable and highly flexible cut resistant gloves.

## Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.



### SanCut 181242

Coating	Polyurethane
Coating Color	Grey
Liner	Dyneema Diamond & Nylon
Liner Color	White
Gauge	15G
Palm Thickness	0,90mm



EN 388:2016



4X42B



### SanCut 181743

Coating	Polyurethane
Coating Color	Grey
Liner	Dyneema Diamond & Nylon
Liner Color	Blue & White Melange
Gauge	15G
Palm Thickness	0,90mm



EN 388:2016



4X43C

Ultra Lightweight ■ Thin ■ Steel-Free ■ Glass Fiber-Free ■ Moderate Resistance ■ High Flexibility



Good Fit to Hands ■ Maximum Comfort ■ High Resistance



# PU Coated Cut Resistant Gloves

Series **191**

## General Properties

High fingertip sensitivity cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

## Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.



### SanCut 191732

Coating	Polyurethane
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Blue & White Melange
Gauge	18G
Palm Thickness	0,70 mm



EN 388:2016



### SanCut 191733

Coating	Polyurethane
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,70mm



EN 388:2016



Thin ■ Glass Fiber-Free ■ High Flexibility ■ Good Fit to Hands ■ Compatible with Use on Touch Screens



Moderate Resistance ■ High Level of Sensitivity for Fingertips



# PU Coated Cut Resistant Gloves

Series **191**



## SanCut 191734

Coating	Polyurethane
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,75mm



## SanCut 191734T

Coating	Polyurethane
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	15G
Palm Thickness	0,80mm



## SanCut 191746

Coating	Polyurethane
Coating Color	Grey
Liner	Steel Fiber & HPPE & Glass Fiber & Nylon
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,90mm



Thin ■ Class Fiber-Free ■ High Flexibility ■ Good Fit to Hands ■ Moderate Resistance



Compatible with Use on Touch Screens ■ High Level of Sensitivity for Fingertips ■ High Resistance



# Nitrile Foam Coated Cut Resistant Gloves

## 301 Series

### Genel Özellikler

It is produced by coating Foam Nitrile on a cut, abrasion and heat-resistant, HPPE fiber and polyester blend lining. TDM 100 provides E level cut resistance according to ISO 13997 test. It makes it easier to hold dry and less oily parts compared to holding with bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.

### Kullanım Alanları

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications.



#### SanCut 301735

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Color	Black-White & Yellow Melange
Gauge	13G
Palm Thickness	1,35 mm



EN 21420



X1XXXX



4X21E





# Nitrile Foam Coated Cut Resistant Gloves

Series **331**

## General Properties

Usable under dry and low-oil working conditions where there is a risk of cuts. Offers a comfortable working opportunity as it has a thin structure and fits well hands

## Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



### SanCut 331334

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black
Gauge	13G
Palm Thickness	1,00mm



### SanCut 331732

Coating	Foam Nitrile
Coating Color	Black
Liner	Glass Fiber & HPPE & Polyester
Liner Color	White & Black Melange
Gauge	15G
Palm Thickness	1,00 mm



### SanCut 331734

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	White & Black Melange
Gauge	15G
Palm Thickness	1,00 mm



High Resistance ■ High Degree of Gripping ■ Compatible with Use on Touch Screens ■ ESD



# Nitrile Foam Coated Cut Resistant Gloves

## Series 341

### General Properties

Double layer knitting with specially designed and reinforced yarns against cut. High grip NBR foam coating and very good dexterity

### Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



#### SanCut 341734

Coating	Foam Nitrile
Coating Color	Black
Liner	HPPE & Glass Fiber & Nylon
Liner Color	Navy Blue & White Melange
Gauge	18G
Palm Thickness	1,00mm



## Series 351

### General Properties

Combination of foam nitrile coating that has a higher degree of gripping, with aramid knit that is thin and resistant to heat and cuts.

### Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



#### SanCut 351734

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & Aramid & Polyester
Liner Color	Yellow & Black Melange
Gauge	15G
Palm Thickness	1,10 mm



# Nitrile Foam Coated Cut Resistant Gloves

Series **381**

## General Properties

Precision working gloves; made of dyneema liner, light, comfortable, durable and allowing for maximum mobility, higher degree of gripping, resistant to cuts.

## Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



### SanCut 381632

Coating	Foam Nitrile
Coating Color	Black
Liner	Dyneema Diamond & Nylon
Liner Color	Blue & White Melange
Gauge	18G
Palm Thickness	0,90 mm



EN 388:2016



EN 420

4X42B



### SanCut 381633

Coating	Foam Nitrile
Coating Color	Black
Liner	Dyneema Diamond & Nylon
Liner Color	Navy Blue & White Melange
Gauge	18G
Palm Thickness	1,00 mm



EN 388:2016



EN 420

4X42C

Ultra Lightweight ■ Thin ■ Steel-Free ■ Glass Fiber-Free ■ High Degree of Gripping ■ Good Fit to Hands ■ High Flexibility ■ Maximum Comfort



# Nitrile Foam Coated Cut Resistant Gloves

Series **391**

## General Properties

High grip cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

## Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



### SanCut 391732

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Blue & White Melange
Gauge	18G
Palm Thickness	0,90 mm



### SanCut 391733

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,90 mm



Thin ■ Moderate Resistance ■ Good Fit to Hands ■ Compatible with Use on Touch Screens ■ High Flexibility



Glass Fiber-Free ■ High Level of Sensitivity for Fingertips ■ High Degree of Gripping ■ ESD



# Nitrile Foam Coated Cut Resistant Gloves

Series **391**



## SanCut 391734

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,95 mm



EN 388:2016



EN 420

4X44D



## SanCut 391734T

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	15G
Palm Thickness	1,00 mm



EN 388:2016




EN 420

4X44D

Thin ■ Moderate Resistance ■ Good Fit to Hands ■ Compatible with Use on Touch Screens ■ High Flexibility



Glass Fiber-Free ■ High Level of Sensitivity for Fingertips ■ High Degree of Gripping ■ High Resistance



# Uncoated Gloves

## General Properties

Gloves lining manufactured using cut resistant threads. High level of flexibility and permeability.

## Areas of Usage

Surface control treatments, general usage, special applications.



### SanCut 050103

Coating	Uncoated
Liner	Aramid & Glass Fiber & Flame Resistant Acrylic
Liner Color	Yellow
Gauge	13G
Palm Thickness	1,03 mm



### SanCut 030704

Coating	Uncoated
Liner	Steel Fiber & HPPE
Liner Color	Black & White Melange
Gauge	13G
Palm Thickness	0,80 mm





## SanCut 040703

Coating	Uncoated
Liner	Glass Fiber & Polyester & Spandex & HPPE
Liner Color	Black & White Melange
Gauge	13G
Palm Thickness	0,80 mm



## Special Purpose Gloves

### General Properties

Glove liners manufactured using cut resistant threads, with finger bottoms softened. These gloves offer a level D cut-resistance, and the finger sections are easily removable. This ensures that the finger sections are easily removed when being caught while working.

### Areas of Usage

Surface control treatments, general usage, special applications.



## SanCut 096704

Coating	Kaplamasız
Liner	HPPE & Steel Fiber & Nylon
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,60 mm



Breathable ■ Good Fit to Hands ■ Maximum Comfort



# Special Purpose Gloves

## Series 396



### SanCut 396734

Coating	Foam Nitrile
Liner	HPPE & Steel Fiber & Nylon
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	1,10 mm



## Series 196



### SanCut 196734

Coating	Polyurethane
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,90 mm



Thin ■ Moderate Resistance ■ Good Fit to Hands ■ Compatible with Use on Touch Screens ■ High Flexibility



Class Fiber-Free ■ High Level of Sensitivity for Fingertips ■ High Degree of Gripping







# Chemical Gloves

## Areas of Usage

- Paint Shops
- Chemical Plants
- Pharmaceutical Industry
- Laboratory And Health Sector





**NL 15**

Nitrile Gloves

Material	Acrylonitrile & Butadiene Rubber
Internal Coating	Yes (Flock)
Thickness	0,42 mm
Length	32 cm



**NEO400**

Neoprene Chemical Gloves

Malzeme	Chloroprene & Natural Rubber
İç Kaplama	Yes (Flock)
Kalınlık	0,70 mm
Uzunluk	34 cm



# Chemical Gloves Selection Guide



CHEMICALS	NEO400		NL15	
	AVERAGE BTT (Min)	Performance Ratio	AVERAGE BTT (Min)	Performance Ratio
1. Acetaldehyde, 99,5%	8			-
2. Acenic Acid, 99+%	152			-
3. Acetone, 99,5%	11		5	
4. AcetoNitrile, 99%	15		5	
5. Acrylic Acid, 99%	66			-
6. Ammonuim Flouride, 40%	>480		>480	
7. Ammonuim Hydroxide, 85%	>480		320	
8. Amyl Acetate, 100%				-
9. Amyl Alcohol, 99+%	138		>480	
10. Aniline, 99 + %	69		10	
11. Aqua Regia	>480		280	
12. Benzaldehyde, 99,5%		-	5	
13. Bromopropionic Acid Sat.	>480		>480	
14. Butyl Acetate, 99+%		-		-
15. Butyl Alcohol, 99%	135		>480	
16. Butyl Cellosolve, 99%	63		>480	
17. Butyrolactone, 99%	170			-
18. Carbon Disulfide, 99,9%		-	10	
19. Carbon Tetrachloride, 99+%		-	>480	
20. Cellosolve Acetate, 99+%	37			-
21. Chromic Acid, 50%		-	>480	
22. Citric Acid, 10%	>480		>480	
23. Cyclohexanol, 98%	392		>480	
24. Diacetone Alcohol, 99%	96		180	
25. Dibutyl Phthalate, 99%	>480		>480	
26. Diethylamine, 99+%		-	5	
27. Diisobutyl Ketone, 80%		-	>480	
28. Dimethyl Acetamide, 99+%		-		-
29. N,N-Dimethylformamide, 99+%	38			-
30. Dimethyl Sulfoxide, 99+%	243			-
31. Dioctyl Phthalate, 99%	>480		>480	
32. 1, 4-Dioxane, 99,9%		-		-
33. Epichlorohydrin, 99+%		-		-
34. Ethyl Acetate, 99+%	10		5	
35. Ethyl Alcohol, 90%	73		293	
36. Ethyl Ether, 99%	4			-
37. Ethyl Glycol Ether, 99%	68		>480	
38. Ethylene Glycol, 99%	>480			-
39. Formaldehyde, 99%	>480		>480	
40. Formic Acid, 95+%	>480			-
41. Freon TF, 99+%	160		>480	
42. Furfural, 99%	35			-
43. Gasoline, White, 100%		-	>480	
44. Gluteraldehyde, 5%		-	>480	
45. Hexamethyldisilazine, 97%	153		>480	
46. Hexane, 99+%	16		>480	
47. Hydrazine, 65%	205		388	
48. Hydrochloric Acid, 10%	>480		>480	
49. Hydrochloric Acid, 38%	>480			-
50. Hydrofluoric Acid, 48%	>480		>480	
51. Hydrogen Peroxide, 30%	>480		>480	

■ Perfect 
 ■ Good 
 ■ Suitable 
 ■ Weak 
 ■ Not Recommend

# Chemical Gloves Selection Guide



CHEMICALS	NEO400		NL15	
	AVERAGE BTT (Min)	Performance Ratio	AVERAGE BTT (Min)	Performance Ratio
52. Hydroquinone, Sat.	>480	Perfect	>480	Suitable
53. Isobutyl Alcohol, 99+%	183	Perfect	>480	Good
54. Iso-Octane, 99%	92	Not Recommend	>480	Good
55. Isopropyl Alcohol, 99+%	142	Perfect	>480	Good
56. Kerosene, 100%	100	Not Recommend	>480	Perfect
57. Lactic Acid, 85%	>480	Perfect	>480	Good
58. Lauric Acid, 36%	>480	Good	>480	Good
59. Maleic Acid, Saturated	>480	Perfect	>480	Good
60. Methyl Alcohol, 99.9%	40	Perfect	-	-
61. Methylamine, 40%	79	Perfect	480	Suitable
62. Methyl t- Butyl Ether, 99.8%	-	-	393	Good
63. Methyl Cellosolve, 99 %	75	Perfect	-	-
64. Methyl Ethyl Ketone, 99+%	-	-	-	-
65. Mineral Spirits, Rule 66, 100%	67	Not Recommend	>480	Good
66. Monoethanolamine, 99%	>480	Perfect	>480	Perfect
67. Morpholine, 99%	-	-	-	-
68. Muriatic Acid, 100%	-	-	>480	Good
69. Naptha VM & P, 100%	35	Not Recommend	>480	Perfect
70. N-Methyl-2-Pyrrolidone, 99+%	-	-	-	-
71. Nitric Acid, 10%	>480	Perfect	>480	Good
72. Nitric Acid, 70%	370	Good	-	-
73. Nitrobenzene, 99%	-	-	-	-
74. Nitromethane, 95.5%	22	Perfect	-	-
75. Nitropropane, 95.5%	26	Weak	-	-
76. Octyl Alcohol, 99+%	275	Perfect	>480	Good
77. Oleic Acid, 99+%	>480	Perfect	>480	Good
78. Oxalic Acid, 12.5%	>480	Perfect	>480	Good
79. Palmitic Acid, Sat.	>480	Perfect	-	-
80. Pentachlorophenol, 35%	>480	Perfect	-	-
81. Pentane, 98%	13	Not Recommend	>480	Perfect
82. Perchloric Acid, 60%	>480	Perfect	>480	Suitable
83. Phenol, 90%	108	Good	-	-
84. Phosphoric Acid, 85%	>480	Perfect	>450	Suitable
85. Potassium Hydroxide, 50%	>480	Perfect	>480	Suitable
86. Propyl Acetate, 99%	-	-	-	-
87. Propyl Alcohol, 96+%	75	Perfect	>480	Good
88. Pyridine, 99%	-	-	-	-
89. Rubber Solvent, 100%	15	Not Recommend	>480	Good
90. Sodium Hydroxide, 50%	>480	Good	>480	Suitable
91. Stoddard Solvent, 99%	62	Not Recommend	>480	Good
92. Sulfuric Acid, 47%	>480	Perfect	>480	Suitable
93. Sulfuric Acid, 95%	260	Perfect	-	-
94. Tannic Acid, 37.5%	>480	Perfect	>325	Good
95. 1,1,2,2-Tetrachloroethane, 99%	-	-	-	-
96. Tetrachloroethylene, 100%	-	-	350	Not Recommend
97. Toluene, 99+%	-	-	19	Weak
98. 1,1,1-Trichloroethane	-	-	-	-
99. Tricresyl Phosphate, 90%	-	Good	330	Suitable
100. Triethanolamine, 85%	-	-	-	-
101. Turpentine, 100%	-	-	>480	Suitable
102. Xylene, 99%	-	-	64	Suitable

■ Perfect   
 ■ Good   
 ■ Suitable   
 ■ Weak   
 ■ Not Recommend





# Safety Helmet



## General Features

Products with EN 397 standard should be used for head protection. Different color options can be preferred in order to the employees in different departments in the enterprises (Blue, White, Yellow, Green, Red, Orange)

In metal splashes, attention should be paid to the MM sign while selecting the helmet.

## Applications

- ☐ Automotive
- ☐ Construction
- ☐ Metal industry
- ☐ Logistic
- ☐ Shipyards







## EB01

### Safety Helmet - Manuel

- Bidirectional ventilation hole provides maximum comfort
- Thanks to adjustable neckband, it can adjust for head sizes manually.
- Rain gutter available
- Use with headphones and viewfinder

### Areas of Usage

Construction Sector, Logistics Sector, Automotive Industry



## EB02

### Safety Helmet with ratchet

- Bidirectional ventilation hole provides maximum comfort
- Thanks to adjustable neckband, it can adjust for head sizes
- Rain gutter available
- Use with headphones and viewfinder

### Areas of Usage

Construction Sector, Logistics Sector, Automotive Industry

# Dust Masks



## **General Features**

It can be folded and conically divided into two models. The conical models fit in a wide range of face sizes with outwardly protruding shape. Foldable models provide easy storage and prevent contamination. Dust masks are classified as protection class FFP1, FFP2 and FFP3.

## **Applications**

- ☐ Automotive
- ☐ Build
- ☐ Cement
- ☐ Mine
- ☐ Food
- ☐ Medicine
- ☐ Welding Works





## SMC

Series of Dust Masks

- Reinforced body structure
- Improved comfort nose clip does not break its structure when used again
- Maximum comfort thanks to nose support
- There are FFP1 and FFP2 Protection Levels
- Thanks to improved ventilation system hot air and breath out easily
- It has a dolamit test
- It has high filtration and low respiratory resistance
- Easy to carry, foldable mask

## Models

- SMC 01 FFP1, NR, D
- SMC 11 FFP1, NR, D Valve
- SMC 11S FFP1, NR, D Valve, Nose Support
- SMC 12S FFP2, NR, D Valve, Nose Support



## SME

Series of Dust Masks

- It has rubber structure and it doesn't contain latex
- Improved comfort nose clip does not break its structure when used again
- There are FFP1, FFP2 and FFP3 Protection Levels
- Thanks to improved ventilation system hot air and breath out easily.
- It has a dolamit test.
- It has high filtration and low respiratory resistance.
- Easy to carry, foldable mask.

## Models

- SME 01 FFP1, NR, D
- SME 11 FFP1, NR, D, Valve
- SME 12 FFP2, NR, D, Valve
- SME 13S FFP3, NR, D, Valve, Nose Support



## SMA

Series of Dust Masks

- It has rubber structure and it doesn't contain latex
- It has a very good insulation structure without clips in the nose area
- It has dolamit test
- Thanks to improved ventilation system hot air and breath out easily
- It has high filtration and low respiratory resistance
- Easy to carry, foldable mask

## Models

- SMA 11 FFP1, NR, D, Valve
- SMA 12S FFP2, NR, D, Valve, Nose Support

# egebant®

## Headquarter

A: TOSB 3. Cadde No: 23 Pk. 41420

Sekerpinar, Cayirova/Kocaeli

T: +90 262 679 1313

F: +90 262 679 1300

E: info@egebant.com.tr

[www.egebant.com.tr](http://www.egebant.com.tr)



/egebant



/egebantcom



/Egebant



/Egebant



/EgebantComTr