

**PRODUCT  
CATALOG**





egeban

3 3 1 3 3 4  
SanCut  
EN 388  
AKA2D  
EN 407:2004  
XXXXXX

10  
SIZE



# PERSONAL PROTECTIVE EQUIPMENT

[www.egebant.com.tr](http://www.egebant.com.tr)

# General Work Gloves

## General Properties

It is produced by coating nitrile on a soft, cotton lining. It is resistant to liquid.

## Areas of Usage

General handling, dry gardening works, construction and building works, general rough works.



### SanSoft NP01 Yellow

Coating	Nitrile
Coating Form	3/4
Coating Color	Yellow
Liner	Cotton
Liner Color	Ecrü
Palm Thickness	0,80 mm



### SanSoft NP01 Blue

Coating	Nitrile
Coating Form	3/4
Coating Color	Blue
Liner	Cotton
Liner Color	Ecrü
Palm Thickness	0,80 mm



# Nitrile Coated General Work Gloves

Series **NP**



## SanSoft NP02

Coating	Nitrile
Coating Form	Complete
Coating Color	Yellow
Liner	Cotton
Liner Color	Ecru
Palm Thickness	0,80 mm



EN 388:2016



3X11A



## SanSoft NP02 Blue

Coating	Nitrile
Coating Form	Complete
Coating Color	Blue
Liner	Cotton
Liner Color	Ecru
Palm Thickness	0,90 mm



EN 388:2016



3X11A

Moderate Resistance ■ Maximum Comfort ■ Liquid Tightness



# Dry and Less Oily Applications

Series 111



## General Properties

Assembly gloves; light weight, higher fingertip sensitivity, thin structure and good fit to hands, perfect price / performance ratio

## Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly of small parts.



### SanFit 111330

Coating	Polyurethane
Coating Color	Black
Liner	Polyester
Liner Color	Black
Gauge	13G
Palm Thickness	0,80 mm



## General Properties

It is produced by coating thin, breathable and durable Polyurethane (PU) on a durable polyester lining. While protecting your hand against mechanical risks, it does not compromise fingertip sensitivity. It makes it easier to hold dry and less oily parts compared to holding with bare hands.



## Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly of small parts



### SanFit 111220

Coating	Polyurethane
Coating Color	White
Liner	Polyester
Liner Color	White
Gauge	13G
Palm Thickness	0,80 mm



### General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, comfortable, fits adaptively to hands.

### Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance



#### SanFit 161330

Coating	Polyurethane
Coating Color	Black
Liner	Polyester
Liner Color	Black
Gauge	13G
Palm Thickness	1,00 mm



#### SanFit 161240

Coating	Polyurethane
Coating Color	Grey
Liner	Polyester
Liner Color	White
Gauge	13G
Palm Thickness	1,00 mm



# PU Coated Precision Assembly Gloves

Series **121**

## General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, offering maximum comfort and durability.

## Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly small parts.



### SanFit 121220

Coating	Polyurethane
Coating Color	White
Liner	Nylon
Liner Color	White
Gauge	13G
Palm Thickness	0,90 mm



### SanFit 121330

Coating	Polyurethane
Coating Color	Black
Liner	Nylon
Liner Color	Black
Gauge	13G
Palm Thickness	0,90 mm



### SanFit 121440

Coating	Polyurethane
Coating Color	Grey
Liner	Nylon
Liner Color	Grey
Gauge	13G
Palm Thickness	0,90 mm





# PU Coated Precision Assembly Gloves

Series **166**

## General Properties

Working gloves; ultra-light weight, offering maximum fingertip sensitivity, easily tearable.



## Areas of Usage

Light assembly works, working with small pieces and applications for which the fingertip sensitivity is very important.



### SanFit 166330

Coating	Polyurethane
Coating Color	Black
Liner	Polyester & Spandex
Liner Color	Black
Gauge	18G
Palm Thickness	0,50 mm



## General Properties

Electrostatic discharge protection featured carbonlining, ESD-certified, touch screens compatible.



## Areas of Usage

Assembly of electrical/electronic components, light assembly and production lines, ESD environments, assembly of small parts.



### SanFit 721740

Coating	Polyurethane
Coating Color	Grey
Liner	Carbon- Nylon & Spandex
Liner Color	Blue & Black Melange
Gauge	18G
Palm Thickness	1,00 mm



Ultra Thin ■ Ultra Lightweight ■ Easy Fragmentation ■ Silicone-Free ■ Low Resistance ■ High Level of Comfort ■ High Resistance ■ Good Fit to Hands



High Level of Sensitivity for Fingertips ■ ESD ■ Lightweight ■ Compatible with Use on Touch Screens



# Nitrile Foam Coated Precision Assembly Gloves

## Series 371

### General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.



### Areas of Usage

General handling, packaging, material handling, light assembly and production lines, light maintenance.



#### SanFoam 371731

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Grey & Black Melange
Gauge	15G
Palm Thickness	0,90 mm



## Series 521

### General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.



### Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.



#### SanFoam 521241

Coating	Foam Nitrile
Coating Color	Grey
Liner	Nylon
Liner Color	White
Gauge	15G
Palm Thickness	0,80 mm



Lightweight ■ High Degree of Gripping ■ High Level of Comfort ■ Moderate Resistance



High Resistance ■ Good Fit to Hands



# Nitrile Foam Coated Precision Assembly Gloves

Series **521**



## SanFoam 521331

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon
Liner Color	Black
Gauge	15G
Palm Thickness	0,90 mm



## SanFoam 521431

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon
Liner Color	Grey
Gauge	15G
Palm Thickness	0,90 mm



Lightweight ■ High Degree of Gripping ■ High Level of Comfort ■ Moderate Resistance



# Nitrile Foam Coated Precision Assembly Gloves

Series **521**



## SanFoam 521731

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon
Liner Color	Black & White Melange
Gauge	15G
Palm Thickness	0,90 mm



## SanFoam 521530

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon
Liner Color	Red
Gauge	15G
Palm Thickness	0,80 mm



# Nitrile Foam Coated Precision Assembly Gloves

Series **571**

## General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort, fits adaptively to hands and durability.

## Areas of Usage

General handling, packaging, material handling, light assembly and production lines, light maintenance.



### SanFoam 571241

Coating	Foam Nitrile
Coating Color	Grey
Liner	Nylon & Spandex
Liner Color	White
Gauge	15G
Palm Thickness	1,00 mm



### SanFoam 571331

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Black
Gauge	15G
Palm Thickness	1,00 mm



High Resistance ■ High Level of Comfort ■ High Degree of Gripping ■ Good Fit to Hands



# Nitrile Foam Coated Precision Assembly Gloves

Series **571**



## SanFoam 571431

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Grey
Gauge	15G
Palm Thickness	1,00 mm



## SanFoam 571731

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Grey & Black Melange
Gauge	15G
Palm Thickness	1,00 mm



# Nitrile Foam Coated Precision Assembly Gloves

Series **821**

## General Properties

Electrostatic discharge protection featured carbon lining, ESD-certified, touch screens compatible.

## Areas of Usage

Assembly of electrical/electronic components, light assembly and production lines, environments, requiring ESD protection, general handling, light maintenance.



### SanFoam 821740

Coating	Foam Nitrile
Coating Color	Grey
Liner	Carbon-Nylon & Spandex
Liner Color	Blue & Black Melange
Gauge	18G
Palm Thickness	1,00 mm



EN 21420

EN 388:2016



4X21X

EN 16350



Lightweight ■ High Resistance ■ Compatible with Use on Touch Screens ■ ESD ■ Good Fit to Hands



Maximum Comfort ■ High Level of Sensitivity for Fingertips ■ High Degree of Gripping



# Uncoated Precision Assembly Gloves

## General Properties

Gloves lining made of polyamide threads high level of flexibility and permeability.

## Areas of Usage

Surface control treatments, general usage, special applications.



### SanFit 020200

Coating	Uncoated
Liner	Nylon
Liner Color	White
Gauge	15G
Palm Thickness	0,70 mm



EN 420





## General Properties

General usage gloves made with recycled yarn; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

## Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.



### Ecocycle 377731

Coating	Foam Nitrile
Coating Color	Black
Liner	Recycle Nylon & Spandex
Liner Color	Green & Black Melange
Gauge	15G
Palm Thickness	0,90 mm



### Ecocycle 317330

Coating	Foam Nitrile
Coating Color	Black
Liner	Recycle Polyester
Liner Color	Black
Gauge	15G
Palm Thickness	0,90 mm



# PU Coated Cut Resistant Gloves

## Series 101

### General Properties

It is produced by coating PU on a thin and heatresistant HPPE fiber and polyester blend lining. TDM 100 provides D level cut resistance according to ISO 13997 test. It makes it easier to hold dry and less oily parts compared to holding with bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.



### Areas of Usage

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications.



#### SanFit 101744

Coating	Polyurethane
Coating Color	Grey
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Color	White-Black & Yellow Melange
Gauge	13G
Palm Thickness	1,15 mm



## Series 131

### General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.



### Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.



#### SanCut 131242

Coating	Polyurethane
Coating Color	Grey
Liner	Glass Fiber & HPPE & Polyester
Liner Color	White
Gauge	15G
Palm Thickness	1,00mm



# PU Coated Cut Resistant Gloves

Series **131**



## SanCut 131742

Coating	Polyurethane
Coating Color	Grey
Liner	Glass Fiber & HPPE & Polyester
Liner Color	White & Black Melange
Gauge	15G
Palm Thickness	1,00mm



EN 420

EN 407:2004



X1XXXX

EN 388:2016



4X42B



## SanCut 131744

Coating	Polyurethane
Coating Color	Grey
Liner	Steel Fiber & HPPE & Polyester
Liner Color	White & Black Melange
Gauge	13G
Palm Thickness	1,00 mm



EN 420

EN 407:2004



X1XXXX

EN 388:2016



4X42D

High Resistance ■ Silicone-Free



# PU Coated Cut Resistant Gloves

## Series 141

### General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.

### Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.



#### SanCut 141243

Coating	Polyurethane
Coating Color	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Color	White
Gauge	13G
Palm Thickness	1,00mm



#### SanCut 141743

Coating	Polyurethane
Coating Color	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Color	White & Black Melange
Gauge	13G
Palm Thickness	1,00mm



#### SanCut 141745

Coating	Polyurethane
Coating Color	Grey
Liner	HPPE & Glass Fiber & Steel Fiber & Polyester & Spandex
Liner Color	White & Black Melange
Gauge	13G
Palm Thickness	1,00mm



High Resistance ■ Good Fit to Hands ■ Metal-Free



# PU Coated Cut Resistant Gloves

Series **181**

## General Properties

Thanks to Dyneema Diamond Technology; light weight, comfortable durable and highly flexible cut resistant gloves.

## Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.



### SanCut 181242

Coating	Polyurethane
Coating Color	Grey
Liner	Dyneema Diamond & Nylon
Liner Color	White
Gauge	15G
Palm Thickness	0,90mm



EN 388:2016



4X42B



### SanCut 181743

Coating	Polyurethane
Coating Color	Grey
Liner	Dyneema Diamond & Nylon
Liner Color	Blue & White Melange
Gauge	15G
Palm Thickness	0,90mm



EN 388:2016



4X43C

Ultra Lightweight ■ Thin ■ Steel-Free ■ Glass Fiber-Free ■ Moderate Resistance ■ High Flexibility



Good Fit to Hands ■ Maximum Comfort ■ High Resistance



# PU Coated Cut Resistant Gloves

Series **191**

## General Properties

High fingertip sensitivity cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

## Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.



### SanCut 191732

Coating	Polyurethane
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Blue & White Melange
Gauge	18G
Palm Thickness	0,70 mm



EN 388:2016



### SanCut 191733

Coating	Polyurethane
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,70mm



EN 388:2016



Thin ■ Glass Fiber-Free ■ High Flexibility ■ Good Fit to Hands ■ Compatible with Use on Touch Screens



Moderate Resistance ■ High Level of Sensitivity for Fingertips



# PU Coated Cut Resistant Gloves

Series **191**



## SanCut 191734

Coating	Polyurethane
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,75mm



## SanCut 191734T

Coating	Polyurethane
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	15G
Palm Thickness	0,80mm



## SanCut 191746

Coating	Polyurethane
Coating Color	Grey
Liner	Steel Fiber & HPPE & Glass Fiber & Nylon
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,90mm



Thin ■ Class Fiber-Free ■ High Flexibility ■ Good Fit to Hands ■ Moderate Resistance



Compatible with Use on Touch Screens ■ High Level of Sensitivity for Fingertips ■ High Resistance



# Nitrile Foam Coated Cut Resistant Gloves

## 301 Series

### Genel Özellikler

It is produced by coating Foam Nitrile on a cut, abrasion and heat-resistant, HPPE fiber and polyester blend lining. TDM 100 provides E level cut resistance according to ISO 13997 test. It makes it easier to hold dry and less oily parts compared to holding with bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.

### Kullanım Alanları

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications.



#### SanCut 301735

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Color	Black-White & Yellow Melange
Gauge	13G
Palm Thickness	1,35 mm



EN 21420



X1XXXX



4X21E





# Nitrile Foam Coated Cut Resistant Gloves

Series **331**

## General Properties

Usable under dry and low-oil working conditions where there is a risk of cuts. Offers a comfortable working opportunity as it has a thin structure and fits well hands

## Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



### SanCut 331334

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black
Gauge	13G
Palm Thickness	1,00mm



### SanCut 331732

Coating	Foam Nitrile
Coating Color	Black
Liner	Glass Fiber & HPPE & Polyester
Liner Color	White & Black Melange
Gauge	15G
Palm Thickness	1,00 mm



### SanCut 331734

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	White & Black Melange
Gauge	15G
Palm Thickness	1,00 mm



High Resistance ■ High Degree of Gripping ■ Compatible with Use on Touch Screens ■ ESD



# Nitrile Foam Coated Cut Resistant Gloves

## Series 341

### General Properties

Double layer knitting with specially designed and reinforced yarns against cut. High grip NBR foam coating and very good dexterity

### Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



#### SanCut 341734

Coating	Foam Nitrile
Coating Color	Black
Liner	HPPE & Glass Fiber & Nylon
Liner Color	Navy Blue & White Melange
Gauge	18G
Palm Thickness	1,00mm



## Series 351

### General Properties

Combination of foam nitrile coating that has a higher degree of gripping, with aramid knit that is thin and resistant to heat and cuts.

### Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



#### SanCut 351734

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & Aramid & Polyester
Liner Color	Yellow & Black Melange
Gauge	15G
Palm Thickness	1,10 mm



# Nitrile Foam Coated Cut Resistant Gloves

Series **381**

## General Properties

Precision working gloves; made of dyneema liner, light, comfortable, durable and allowing for maximum mobility, higher degree of gripping, resistant to cuts.

## Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



### SanCut 381632

Coating	Foam Nitrile
Coating Color	Black
Liner	Dyneema Diamond & Nylon
Liner Color	Blue & White Melange
Gauge	18G
Palm Thickness	0,90 mm



### SanCut 381633

Coating	Foam Nitrile
Coating Color	Black
Liner	Dyneema Diamond & Nylon
Liner Color	Navy Blue & White Melange
Gauge	18G
Palm Thickness	1,00 mm



Ultra Lightweight ■ Thin ■ Steel-Free ■ Glass Fiber-Free ■ High Degree of Gripping ■ Good Fit to Hands ■ High Flexibility ■ Maximum Comfort



# Nitrile Foam Coated Cut Resistant Gloves

Series **391**

## General Properties

High grip cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

## Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



### SanCut 391732

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Blue & White Melange
Gauge	18G
Palm Thickness	0,90 mm



### SanCut 391733

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,90 mm



Thin ■ Moderate Resistance ■ Good Fit to Hands ■ Compatible with Use on Touch Screens ■ High Flexibility



Glass Fiber-Free ■ High Level of Sensitivity for Fingertips ■ High Degree of Gripping ■ ESD



# Nitrile Foam Coated Cut Resistant Gloves

Series **391**



## SanCut 391734

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,95 mm



EN 388:2016



4X44D



## SanCut 391734T

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	15G
Palm Thickness	1,00 mm



EN 388:2016



4X44D

Thin ■ Moderate Resistance ■ Good Fit to Hands ■ Compatible with Use on Touch Screens ■ High Flexibility



Glass Fiber-Free ■ High Level of Sensitivity for Fingertips ■ High Degree of Gripping ■ High Resistance



# Uncoated Gloves

## General Properties

Gloves lining manufactured using cut resistant threads. High level of flexibility and permeability.

## Areas of Usage

Surface control treatments, general usage, special applications.



### SanCut 050103

Coating	Uncoated
Liner	Aramid & Glass Fiber & Flame Resistant Acrylic
Liner Color	Yellow
Gauge	13G
Palm Thickness	1,03 mm



### SanCut 030704

Coating	Uncoated
Liner	Steel Fiber & HPPE
Liner Color	Black & White Melange
Gauge	13G
Palm Thickness	0,80 mm





## SanCut 040703

Coating	Uncoated
Liner	Glass Fiber & Polyester & Spandex & HPPE
Liner Color	Black & White Melange
Gauge	13G
Palm Thickness	0,80 mm



## Special Purpose Gloves

### General Properties

Glove liners manufactured using cut resistant threads, with finger bottoms softened. These gloves offer a level D cut-resistance, and the finger sections are easily removable. This ensures that the finger sections are easily removed when being caught while working.

### Areas of Usage

Surface control treatments, general usage, special applications.



## SanCut 096704

Coating	Kaplamasız
Liner	HPPE & Steel Fiber & Nylon
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,60 mm



Breathable ■ Good Fit to Hands ■ Maximum Comfort



# Special Purpose Gloves

## Series 396



### SanCut 396734

Coating	Foam Nitrile
Liner	HPPE & Steel Fiber & Nylon
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	1,10 mm



## Series 196



### SanCut 196734

Coating	Polyurethane
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,90 mm



Thin ■ Moderate Resistance ■ Good Fit to Hands ■ Compatible with Use on Touch Screens ■ High Flexibility



Class Fiber-Free ■ High Level of Sensitivity for Fingertips ■ High Degree of Gripping







SanCut  
e7  
SAFETY  
CE  
EN 388  
EN 12400  
EN 10819  
EN 10820  
EN 10821  
EN 10822  
EN 10823  
EN 10824  
EN 10825  
EN 10826  
EN 10827  
EN 10828  
EN 10829  
EN 10830  
EN 10831  
EN 10832  
EN 10833  
EN 10834  
EN 10835  
EN 10836  
EN 10837  
EN 10838  
EN 10839  
EN 10840  
EN 10841  
EN 10842  
EN 10843  
EN 10844  
EN 10845  
EN 10846  
EN 10847  
EN 10848  
EN 10849  
EN 10850  
EN 10851  
EN 10852  
EN 10853  
EN 10854  
EN 10855  
EN 10856  
EN 10857  
EN 10858  
EN 10859  
EN 10860  
EN 10861  
EN 10862  
EN 10863  
EN 10864  
EN 10865  
EN 10866  
EN 10867  
EN 10868  
EN 10869  
EN 10870  
EN 10871  
EN 10872  
EN 10873  
EN 10874  
EN 10875  
EN 10876  
EN 10877  
EN 10878  
EN 10879  
EN 10880  
EN 10881  
EN 10882  
EN 10883  
EN 10884  
EN 10885  
EN 10886  
EN 10887  
EN 10888  
EN 10889  
EN 10890  
EN 10891  
EN 10892  
EN 10893  
EN 10894  
EN 10895  
EN 10896  
EN 10897  
EN 10898  
EN 10899  
EN 10900

# Chemical Gloves

## Areas of Usage

- Paint Shops
- Chemical Plants
- Pharmaceutical Industry
- Laboratory And Health Sector





**NL 15**

Nitrile Gloves

Material	Acrylonitrile & Butadiene Rubber
Internal Coating	Yes (Flock)
Thickness	0,42 mm
Length	32 cm



**NEO400**

Neoprene Chemical Gloves

Malzeme	Chloroprene & Natural Rubber
İç Kaplama	Yes (Flock)
Kalınlık	0,70 mm
Uzunluk	34 cm



# Chemical Gloves Selection Guide



CHEMICALS	NEO400		NL15	
	AVERAGE BTT (Min)	Performance Ratio	AVERAGE BTT (Min)	Performance Ratio
1. Acetaldehyde, 99,5%	8			-
2. Acenic Acid, 99+%	152			-
3. Acetone, 99,5%	11		5	
4. AcetoNitrile, 99%	15		5	
5. Acrylic Acid, 99%	66			-
6. Ammonuim Flouride, 40%	>480		>480	
7. Ammonuim Hydroxide, 85%	>480		320	
8. Amyl Acetate, 100%				-
9. Amyl Alcohol, 99+%	138		>480	
10. Aniline, 99 + %	69		10	
11. Aqua Regia	>480		280	
12. Benzaldehyde, 99,5%		-	5	
13. Bromopropionic Acid Sat.	>480		>480	
14. Butyl Acetate, 99+%		-		-
15. Butyl Alcohol, 99%	135		>480	
16. Butyl Cellosolve, 99%	63		>480	
17. Butyrolactone, 99%	170			-
18. Carbon Disulfide, 99,9%		-	10	
19. Carbon Tetrachloride, 99+%		-	>480	
20. Cellosolve Acetate, 99+%	37			-
21. Chromic Acid, 50%		-	>480	
22. Citric Acid, 10%	>480		>480	
23. Cyclohexanol, 98%	392		>480	
24. Diacetone Alcohol, 99%	96		180	
25. Dibutyl Phthalate, 99%	>480		>480	
26. Diethylamine, 99+%		-	5	
27. Diisobutyl Ketone, 80%		-	>480	
28. Dimethyl Acetamide, 99+%		-		-
29. N,N-Dimethylformamide, 99+%	38			-
30. Dimethyl Sulfoxide, 99+%	243			-
31. Dioctyl Phthalate, 99%	>480		>480	
32. 1, 4-Dioxane, 99,9%		-		-
33. Epichlorohydrin, 99+%		-		-
34. Ethyl Acetate, 99+%	10		5	
35. Ethyl Alcohol, 90%	73		293	
36. Ethyl Ether, 99%	4			-
37. Ethyl Glycol Ether, 99%	68		>480	
38. Ethylene Glycol, 99%	>480			-
39. Formaldehyde, 99%	>480		>480	
40. Formic Acid, 95+%	>480			-
41. Freon TF, 99+%	160		>480	
42. Furfural, 99%	35			-
43. Gasoline, White, 100%		-	>480	
44. Gluteraldehyde, 5%		-	>480	
45. Hexamethyldisilazine, 97%	153		>480	
46. Hexane, 99+%	16		>480	
47. Hydrazine, 65%	205		388	
48. Hydrochloric Acid, 10%	>480		>480	
49. Hydrochloric Acid, 38%	>480			-
50. Hydrofluoric Acid, 48%	>480		>480	
51. Hydrogen Peroxide, 30%	>480		>480	

■ Perfect 
 ■ Good 
 ■ Suitable 
 ■ Weak 
 ■ Not Recommend

# Chemical Gloves Selection Guide



CHEMICALS	NEO400		NL15	
	AVERAGE BTT (Min)	Performance Ratio	AVERAGE BTT (Min)	Performance Ratio
52. Hydroquinone, Sat.	>480	Perfect	>480	Suitable
53. Isobutyl Alcohol, 99+%	183	Perfect	>480	Good
54. Iso-Octane, 99%	92	Not Recommend	>480	Good
55. Isopropyl Alcohol, 99+%	142	Perfect	>480	Good
56. Kerosene, 100%	100	Not Recommend	>480	Perfect
57. Lactic Acid, 85%	>480	Perfect	>480	Good
58. Lauric Acid, 36%	>480	Good	>480	Good
59. Maleic Acid, Saturated	>480	Perfect	>480	Good
60. Methyl Alcohol, 99.9%	40	Perfect	-	-
61. Methylamine, 40%	79	Perfect	480	Suitable
62. Methyl t- Butyl Ether, 99.8%	-	-	393	Good
63. Methyl Cellosolve, 99 %	75	Perfect	-	-
64. Methyl Ethyl Ketone, 99+%	-	-	-	-
65. Mineral Spirits, Rule 66, 100%	67	Not Recommend	>480	Good
66. Monoethanolamine, 99%	>480	Perfect	>480	Perfect
67. Morpholine, 99%	-	-	-	-
68. Muriatic Acid, 100%	-	-	>480	Good
69. Naptha VM & P, 100%	35	Not Recommend	>480	Perfect
70. N-Methyl-2-Pyrrolidone, 99+%	-	-	-	-
71. Nitric Acid, 10%	>480	Perfect	>480	Good
72. Nitric Acid, 70%	370	Good	-	-
73. Nitrobenzene, 99%	-	-	-	-
74. Nitromethane, 95.5%	22	Perfect	-	-
75. Nitropropane, 95.5%	26	Weak	-	-
76. Octyl Alcohol, 99+%	275	Perfect	>480	Good
77. Oleic Acid, 99+%	>480	Perfect	>480	Good
78. Oxalic Acid, 12.5%	>480	Perfect	>480	Good
79. Palmitic Acid, Sat.	>480	Perfect	-	-
80. Pentachlorophenol, 35%	>480	Perfect	-	-
81. Pentane, 98%	13	Not Recommend	>480	Perfect
82. Perchloric Acid, 60%	>480	Perfect	>480	Suitable
83. Phenol, 90%	108	Good	-	-
84. Phosphoric Acid, 85%	>480	Perfect	>450	Suitable
85. Potassium Hydroxide, 50%	>480	Perfect	>480	Suitable
86. Propyl Acetate, 99%	-	-	-	-
87. Propyl Alcohol, 96+%	75	Perfect	>480	Good
88. Pyridine, 99%	-	-	-	-
89. Rubber Solvent, 100%	15	Not Recommend	>480	Good
90. Sodium Hydroxide, 50%	>480	Good	>480	Suitable
91. Stoddard Solvent, 99%	62	Not Recommend	>480	Good
92. Sulfuric Acid, 47%	>480	Perfect	>480	Suitable
93. Sulfuric Acid, 95%	260	Perfect	-	-
94. Tannic Acid, 37.5%	>480	Perfect	>325	Good
95. 1,1,2,2-Tetrachloroethane, 99%	-	-	-	-
96. Tetrachloroethylene, 100%	-	-	350	Not Recommend
97. Toluene, 99+%	-	-	19	Weak
98. 1,1,1-Trichloroethane	-	-	-	-
99. Tricresyl Phosphate, 90%	-	Good	330	Suitable
100. Triethanolamine, 85%	-	-	-	-
101. Turpentine, 100%	-	-	>480	Suitable
102. Xylene, 99%	-	-	64	Suitable

■ Perfect   
 ■ Good   
 ■ Suitable   
 ■ Weak   
 ■ Not Recommend





# Safety Helmet



## General Features

Products with EN 397 standard should be used for head protection. Different color options can be preferred in order to the employees in different departments in the enterprises (Blue, White, Yellow, Green, Red, Orange)

In metal splashes, attention should be paid to the MM sign while selecting the helmet.

## Applications

- ☐ Automotive
- ☐ Construction
- ☐ Metal industry
- ☐ Logistic
- ☐ Shipyards







## EB01

### Safety Helmet - Manuel

- Bidirectional ventilation hole provides maximum comfort
- Thanks to adjustable neckband, it can adjust for head sizes manually.
- Rain gutter available
- Use with headphones and viewfinder

### Areas of Usage

Construction Sector, Logistics Sector, Automotive Industry



## EB02

### Safety Helmet with ratchet

- Bidirectional ventilation hole provides maximum comfort
- Thanks to adjustable neckband, it can adjust for head sizes
- Rain gutter available
- Use with headphones and viewfinder

### Areas of Usage

Construction Sector, Logistics Sector, Automotive Industry

# Dust Masks



## **General Features**

It can be folded and conically divided into two models. The conical models fit in a wide range of face sizes with outwardly protruding shape. Foldable models provide easy storage and prevent contamination. Dust masks are classified as protection class FFP1, FFP2 and FFP3.

## **Applications**

- ☐ Automotive
- ☐ Build
- ☐ Cement
- ☐ Mine
- ☐ Food
- ☐ Medicine
- ☐ Welding Works





## SMC

Series of Dust Masks

- Reinforced body structure
- Improved comfort nose clip does not break its structure when used again
- Maximum comfort thanks to nose support
- There are FFP1 and FFP2 Protection Levels
- Thanks to improved ventilation system hot air and breath out easily
- It has a dolomit test
- It has high filtration and low respiratory resistance
- Easy to carry, foldable mask

## Models

- SMC 01 FFP1, NR, D
- SMC 11 FFP1, NR, D Valve
- SMC 11S FFP1, NR, D Valve, Nose Support
- SMC 12S FFP2, NR, D Valve, Nose Support



## SME

Series of Dust Masks

- It has rubber structure and it doesn't contain latex
- Improved comfort nose clip does not break its structure when used again
- There are FFP1, FFP2 and FFP3 Protection Levels
- Thanks to improved ventilation system hot air and breath out easily.
- It has a dolomit test.
- It has high filtration and low respiratory resistance.
- Easy to carry, foldable mask.

## Models

- SME 01 FFP1, NR, D
- SME 11 FFP1, NR, D, Valve
- SME 12 FFP2, NR, D, Valve
- SME 13S FFP3, NR, D, Valve, Nose Support



## SMA

Series of Dust Masks

- It has rubber structure and it doesn't contain latex
- It has a very good insulation structure without clips in the nose area
- It has dolomit test
- Thanks to improved ventilation system hot air and breath out easily
- It has high filtration and low respiratory resistance
- Easy to carry, foldable mask

## Models

- SMA 11 FFP1, NR, D, Valve
- SMA 12S FFP2, NR, D, Valve, Nose Support





# ADHESIVE TAPES

# Adhesive Tapes



## Packaging Tapes

### Product Features

General purpose packaging tape.

It is suitable for light and medium weight carton closure.

Suitable for use with hand-held dispenser and automatic packaging machines

Can be produced at any desired width and length



Product Code	Carrier	Adhesive Type	Color	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Sander PP5231	BOPP	Synthetic Rubber	Transparent / Brown / White	25 mic.	145	60	General purpose packaging tape.
Egebant PP31	BOPP	Synthetic Rubber	Transparent / Brown / White	28 mic.	145	60	General purpose packaging tape.
Egebant PP30S	BOPP	Natural Rubber	Transparent / Brown / White	28 mic.	145	60	General purpose packaging tape.
Egebant PP35	BOPP	Natural Rubber	Transparent / Brown / White	35 mic.	145	60	General purpose packaging tape.
Egebant PVC 330	PVC	Natural Rubber	Transparent / Brown / White	33 mic.	145	60	General purpose packaging tape.
Egebant Kraft Tape	Kraft Paper	Natural Rubber	Brown	105 mic.	6	60	General purpose packaging tape.



## Masking Tapes

### Product Features

- Can be removed without leaving a residue
- Solvent-resistant
- Temperature resistance
- Easy tear
- Controlled expansion
- Conformability to stretch and adhere round curves
- High initial adhesion



Product Code	Carrier	Adhesive Type	Thickness	Temperature Resistance (°C)	Application Areas
Sander 6127	Crepe Paper	Natural Rubber	110 mic.	30	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant MSK60	Crepe Paper	Natural Rubber	125 mic.	80 (30')	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant MSK6280	Crepe Paper	Natural Rubber	130 mic.	100 (30')	High heat resistance, wet sanding and tiner-like chemical resistance, a general purpose masking tape. Up to 100 degree heat resistance.
Egebant MSK100	Waterproof Crepe Paper	Natural Rubber	140 mic.	120 (30')	General purpose masking tape. Very high heat resistance, resistant to wet sanding and filling materials, thinner infrared light, durable and resistant to chemicals. Up to 120 degrees heat resistance
Egebant P40	PET	Silicon	60 mic.	180 (30')	High-Temperature powder paint masking tape.
Egebant 6268	Crepe Green Paper	Natural Rubber	125 mic.	80 (30')	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant 6265	Crepe Blue Paper	Natural Rubber	125 mic.	80 (30')	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant 6267	Crepe Orange Paper	Natural Rubber	125 mic.	80 (30')	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Maskopri	Paper HDPE Film	Natural Rubber	125 mic.	80 (30')	The film is electrostatically loaded to stick to whole surface. Recommended for professional, industrial and DIY applications.



## Egebant Colored Masking Tape



Product Code	Colors	Adhesive Type	Temperature Resistance (°C)	Application Areas
Egebant 25 x 50	Blue, Orange, Green, White	Naturel Rubber	80	General purpose masking tape. Construction industry, automotive industry, white goods industry and cable bundling.
Egebant 50 x 50				

## Duct Tapes

### Product Features

- Hand-tearable
- Moisture resistant
- Can adhere to most surfaces
- High tensile strength
- Waterproof, suitable for many repair applications.



Product Code	Carrier	Adhesive Type	Color	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Egebant TPL201	PE Coated Cloth	Synthetic Rubber	Black / White / Gray	180 mic.	10	60	It is a general purpose cloth tape.
Egebant TPL204	PE Coated Cloth	Synthetic Rubber	Gray	155 mic.	13	60	It is a multi-purpose, single-sided repair tape.
Egebant CTI604	PE	Synthetic Rubber	Gray	160 mic.	10	60	General purpose cloth tape.

## Strapping Tapes

### Product Features

No residue left on the surface after sticking.

Used for strapping plastic and metal parts in White Goods Industry.

High UV resistance.



Product Code	Carrier	Adhesive Type	Color	Thickness	Temperature Resistance (°C)	Application Areas
Egebant PP505	MOPP	Natural Rubber	White	70 mic.	60	General-purpose strapping tape.
Egebant PP550	MOPP	Natural Rubber	Blue / White	55 mic.	60	General-purpose strapping tape.
Egebant PP855	MOPP	Natural Rubber	Blue	113 mic	60	General-purpose strapping tape.
Egebant PP850	MOPP	Natural Rubber	Blue / White	113 mic.	60	General-purpose strapping tape.

## Filament Tapes

### Product Features

Reinforced with glass fiber packaging and bundling tape.



Product Code	Carrier	Adhesive Type	Color	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Egebant FG10	Reinforced with fiberglass BOPP	Synthetic Rubber	Clear / White	120 mic.		60	Flat braided, palletizing tape
Egebant FGBD	Reinforced with fiberglass BOPP	Synthetic Rubber	Clear / White	120 mic.		60	Cross-linked palletizing tape
Egebant ST300	MOPP	Synthetic Rubber	Clear	50 mic.		60	Food and beverage packages transport band is used as
Egebant GL96	Fiberglass	Silicon	White	165 mic.	3,5	250	Glass fiber with high temperature resistance, one side is reinforced cloth tape.

## Aluminium Tapes

### Product Features

High resistance to moisture and chemicals

Thermal conductivity

Heat and light reflectance

Flame resistance

Strength of the external environment

Vibration damping and isolation



Product Code	Carrier	Adhesive Type	Color	Thickness	Tensile Strength	Temperature Resistance (°C)	Application Areas
Egebant AF1825	Al.Foil	Acrylic	Metallic Gray	18 mic.	40	150	18 mic. Aluminium tape
Egebant AF4025	Al. Foil	Acrylic	Metallic Gray	40 mic.	40	150	40 mic. Aluminium tape
Egebant AF5025	Al. Foil	Acrylic	Metallic Gray	50 mic.	40	150	50 mic. Aluminium tape
Egebant AF7525	Al. Foil	Acrylic	Metallic Gray	75 mic.	60	150	75 mic. Aluminium tape
Egebant TT9934	Al. Foil	Acrylic	Metallic Gray	150 mic.	275	150	150 mic. Aluminium tape
Egebant TT9940	BOPP - Al. Foil	Acrylic	Metallic Gray	90 mic.	105	150	It is a BOPP coated adhesive aluminium tape having high tensile strength. Used in white goods sector and aluminium panels bonding.
Egebant AF5025	VL-Al.Foil	Acrylic	Metallic Gray	90 mic.	40	120	HVAC

## Double Sided Tapes

### Product Features

High initial adhesion

Easy to tear by hand

Designed to bond to low surface energy plastic



Product Code	Carrier	Adhesive Type	Color	Thickness (mic.)	Temperature Resistance (°C)	Application Areas
Egebant TNT710	Non Woven	Synthetic Rubber	Translucent	100	60	Usually laminated foam operations, cardboard, metal and adding used.
Egebant D022A	Non Woven	Acrylic	Translucent	100	120	For general purposes, wood, metal, glass, paper, plastic used for welding
Egebant 6750	Non Woven	Acrylic	Blue	100	200	Has a high initial adhesive strength and high-speed coil Adding used
Egebant 8160	PET	Acrylic	Clear	120	100	General purpose
Egebant D5082	PET	Acrylic	Clear	100	90	General purpose
Egebant D5028	PET	Acrylic	Clear	125	90	General purpose
Egebant D2040	PET	Acrylic	Clear	95	90	General purpose
Egebant TNT710/160	Non Woven	Synthetic Rubber	Translucent	160	60	Laminated foam operations, cardboard and general purpose
Egebant VX160	Non Woven	Synthetic Rubber	Translucent	160	60	Laminated foam operations, cardboard and general purpose
Egebant H-09	Non Woven	Synthetic Rubber	Translucent	80	60	Laminated foam operations, cardboard and general purpose
Egebant 90HX	Non	Acrylic	White	110	90	Cross Linked Transfer Tape

## Film Backing Tapes

### Product Features

Ease of use

PVC, PET, cloth, fabric and OPP carriers

Kinds of acrylic and rubber adhesive

High and low surface energy good adhesion to the product

High initial adhesion force



Product Code	Carrier	Adhesive Type	Color	Thickness (mic.)	Temperature Resistance (°C)	Application Areas
Egebant RDA700	OPP	Synthetic Rubber	Clear	98	60	General purpose
Egebant PT150	PET	Modified Acrylic	Translucent	150	120	Bonding of metal panels and mirrors.
Egebant PT205	PET	Modified Acrylic	Translucent	205	120	Bonding of metal panels and mirrors.

## Foam Tapes

### Product Features

Flexibility and space-filling

Bonding rough or irregular surfaces

Vibration and noise isolation

Impact resistance

Heat resistance



Product Code	Carrier	Adhesive Type	Color	Thickness (mm)	Temperature Resistance (°C)	Application Areas
Egebant FT 67	PE Foam	Acrylic	White	1,0	90	General purpose bonding solutions used in outdoor environments.
Egebant FT 67	PE Foam	Acrylic	Black	1,0	90	General purpose bonding solutions used in outdoor environments.
Egebant 1100R+	Modified Acryled Foam	Acrylic	White	1,1	120	General purpose bonding solutions used in outdoor environments.
Egebant 71100	Modified Acryled Foam	Acrylic	Black/White	1,1	120	General purpose bonding solutions used in outdoor environments.
Egebant 640R+	Modified Acryled Foam	Acrylic	White	0,64	120	General purpose bonding solutions used in outdoor environments.
Egebant 70080	Modified Acryled Foam	Acrylic	Black/Gray	0,8	120	General purpose bonding solutions used in outdoor environments.
Egebant 500R	NON	Acrylic	Transparent	0,5	120	General purpose bonding solutions used in outdoor environments.
Egebant 1000R	NON	Acrylic	Transparent	1,0	120	General purpose bonding solutions used in outdoor environments.

# Adhesive Tapes

## Pe Freezer Tapes





Product Code	Carrier	Adhesive Type	Color	Thickness	Tensile Strength	Adhesive N/25mm	Application Areas
Egebant TT6405	LDPE	Syn. Rubber	White	73 mic.	28	13	Used in Evap coil winding in white goods industry. Polyurethane has a high binding capacity. Strong resistance against cold.
Egebant TT6400	LDPE	Syn. Rubber	White	85 mic.	30	20	Used in Evap coil winding in white goods industry. Polyurethane has a high binding capacity. Strong resistance against cold.

## Isolation Plate

### Product Features

Adhesive laminated Polycarbonate or PVC plates, to isolate electronic components, in electronic devices.



## Refrigerator Back Carton Plates

### Product Features

Aluminium and PE laminated carton for refrigerator back panels. Can be converted in different dimensions and shapes.






## Isolation Foam

### Product Features

Adhesive laminated Polyurethane or Silicone strips for TV production.

Different friction and shore levels



Can be converted into different lengths and widths

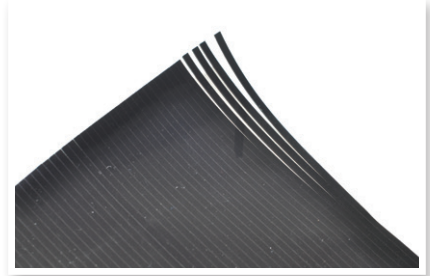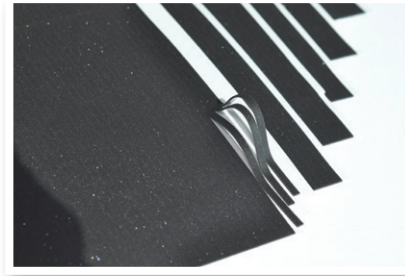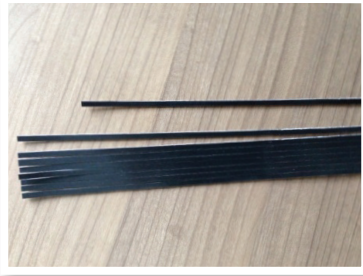

## Die-Cut Kiss-Cut Product

### Product Features

Adhesive laminated foams. Die cut, kiss cut, double sided tape, Aluminium Tapes.

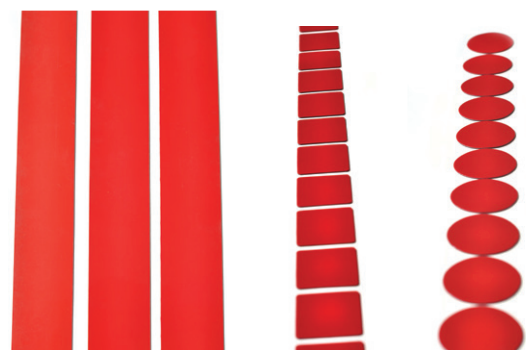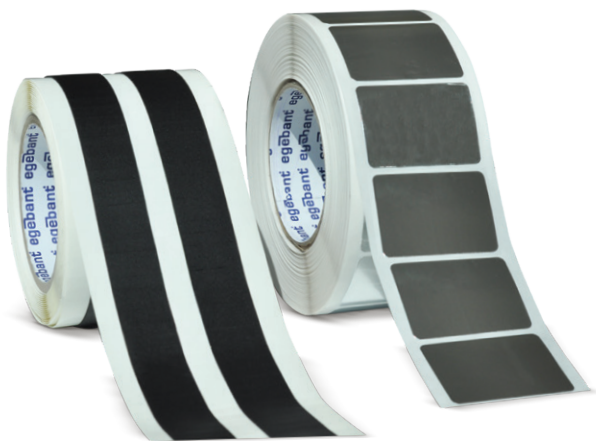







# ABRASIVES

[www.egebant.com.tr](http://www.egebant.com.tr)

# Abrasives



## Abrasive Belts / Wide Belts

### Product Features

Suitable for all sanding and grinding operations: with unsupported belt, sander pad and contact wheel


Special designs for customised applications, e.g. for furniture production to enable fast and clean preparation of large surfaces ready for painting

Wide range of sizes

Paper and cloth backed

All products with high tensile strength and optimum stretching resistance

### Joint types



Overlap joint

Double skived joint

Zigzag film joint

Film joint

Film on top joint

## Segmented Belts

### Product Features

Its strong polyester backing and sharp silicon carbide mineral provide superior performance in materials such as chipboard, MDF, HDF, and OSB.

Its special backing structure provides long life and high-performance.

### Applications

- ☐ Steel
- ☐ Wood
- ☐ Stainless Steel
- ☐ Paint / Varnish / Filler
- ☐ NF Metal
- ☐ Plastic
- ☐ Glass




Grain	Backing	Coating
Aluminium Oxide	D, F, G paper	Open
Zirconia Alumina	J, JF, X, XF Cloth	Semi-Open
Ceramic Aluminium Oxide	Y, Z Polyester	Close
Silicon Carbide (SiC)	Film	

- ☐ Custom sizes available



### Applications

- ☐ Calibrating, intermediate sanding and finishing

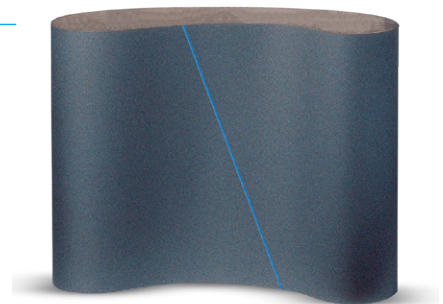

### Materials

- ☐ Chipboard
- ☐ OSB board MDF and HDF board

Grain	Backing	Coating	Grits
Silicon Carbide (SiC)	Y Polyester Paper	Semi-Open	24-180

## Velcro / Psa Discs

### Product Features


Suitable for orbital and rotary machines. These sandpapers, which have a wide range of sizes and holes, are suitable for wet and dry use, and also have cloth and film backing options.




### Applications

- ☐ Steel
- ☐ Stainless Steel
- ☐ Wood
- ☐ Paint / Varnish / Filler
- ☐ Plastic
- ☐ Metals
- ☐ Glass
- ☐ Stone


Grain	Backing	Coating
Aluminium Oxide	B, C, D, E, F paper	Semi-Open
Zirconia Alumina	X, JF Cloth	Close
Ceramic Aluminium Oxide	Film	
Silicon Carbide (SiC)		




**D1**  
9 Holes  
76 mm, 115 mm,  
125 mm, 150mm,  
180 mm, 200 mm,  
250mm




**D2**  
8 Holes  
76 mm, 115 mm,  
125 mm, 150mm,  
180 mm, 200 mm,  
250mm




**D3**  
6 Holes  
76 mm, 115 mm,  
125 mm, 150mm,  
180 mm, 200 mm,  
250mm




**D4**  
8 Holes  
76 mm, 115 mm,  
125 mm, 150mm,  
180 mm, 200 mm,  
250mm



**D5**  
8 Holes  
76 mm, 115 mm,  
125 mm, 150mm,  
180 mm, 200 mm,  
250mm



**D6**  
8 Holes (Outside)  
6 Holes (Inside)  
76 mm, 115 mm,  
125 mm, 150mm,  
180 mm, 200 mm,  
250mm



**D7**  
8 Holes (Outside)  
8 Holes (Inside)  
76 mm, 115 mm,  
125 mm, 150mm,  
180 mm, 200 mm,  
250mm  
1 hole in the center

## Foam and Sponge Sanding Pads/Discs

### Product Features

Flexible abrasives for countered surfaces

Due to its sponge backing, suitable for all profile surfaces

Dimension	Type	Grit Range
96x66x25 mm	Pad	36-400
96x123x12,5mm	Pad	36-400
115x140x5mm	Pad	Medium, Fine, Super Fine, Ultra Fine, Micro Fine
Diameter: 150 Velcro	Flat - Perforated	Medium, Fine, Super Fine



## Foam-Backed Abrasive Rolls

### Product Features

High quality flexible aluminium oxide abrasive rolls.

Due to its foam backing, suitable for all surfaces.

Very good performance on most woods, paint, varnish and lacquer.

Dimension	Grit Range	Unit
115 mm x 25 m	40-1500	1



# Flap Wheels

## Flap Wheels

### Product Features

Our flap wheels are used for stock removal, finishing, etc. on flat or different forms of surfaces. It is suitable for surface sanding operations. Thanks to its flexible leaf structure, it provides high performance on all kinds of surfaces.



### Applications

- Paint / Varnish / Filler
- Wood
- Plastic
- Metals

Grain	Backing
Aluminium Oxide	X Cloth - JF Cloth

Crit	24-36-40	50-60	80-120	150-220	240-320	400	Unit/Box
			100 x 50				2
			100 x 100				1
			150 x 30				1
			150 x 50				1
			165 x 30				3
			165 x 50				2
			200 x 50				1
			250 x 50				1
			300 x 30				1
			300 x 50				1
			350 x 50				1
			350 x 100				1
			380 x 75				1
			410 x 30				1
			410 x 50				1
			410 x 100				1

## Spindle Mounted Flap Wheels

### Product Features

Suitable for use on metal and wood surfaces.



### Applications

- Wood
- Plastic
- Metals

Grain	Backing
Aluminium Oxide- Silicon Carbide	X Cloth - JF Cloth

Crit	40-80	100-180	220-320	Unit/Box
			30 x 10 x 6	100
			30 x 15 x 6	100
			40 x 15 x 6	50
			40 x 20 x 6	50
			40 x 25 x 6	50
			40 x 30 x 6	50
			50 x 10 x 6	20
			50 x 15 x 6	20
			50 x 20 x 6	20
			50 x 25 x 6	20
			50 x 30 x 6	20
			50 x 40 x 6	20
			60 x 10 x 6	20
			60 x 15 x 6	20
			60 x 20 x 6	20
			60 x 25 x 6	20
			60 x 30 x 6	20
			60 x 40 x 6	10
			60 x 50 x 6	10
			80 x 15 x 6	10
			80 x 20 x 6	10
			80 x 25 x 6	10
			80 x 30 x 6	10
			80 x 40 x 6	9
			80 x 50 x 6	9

## Threaded Flap Wheel

### Product Features

Our threaded flap wheels are used for stock removal, finishing etc. on flat or different forms of surfaces. It is suitable for surface sanding operations. Thanks to its flexible leaf structure, it provides high performance on all kinds of surfaces.

Can be used on all standard angle grinders (80 m/s).

It can be easily removed and installed without the help of any tools.

### Applications

- Paint
- Plastic
- Wood
- Metal



Grain	Grit	Grit P40 - P120	Unit/Box
Aluminium Oxide	115 x 20 mm		5

## Slashed Flap Wheel

### Product Features

It adapts to profiled surfaces thanks to its fringed leaves.

### Applications

- Paint
- Wood
- Metals
- Plastic



Grain	Backing
Aluminium Oxide	X Cloth - JF Cloth

## CSD Flap Wheels

### Product Features

For removing paint, varnish and rust from seams, door jambs, drip moldings, pinchwelds and other difficult-to-reach areas.

### Applications

- Metal
- Paint
- Plastic



Grain	Color	Coating
Silicon Carbide (SiC)	Black	100 X 13
	Blue	150 X 13
	Purple	100 X 10 X 6
		100 X 20 X 6
		100 X 100 X 20

## V-TYPE Flap Wheel

### Product Features

It is suitable for sanding surfaces in corner welds and hard-to-reach spots. It is perfect for a wide range of jobs, from finishing to high stock removal, because of its wide selection of grit.

### Applications

- Welding
- Metals

Grain	Backing
Zirconia - Aluminium Oxide	X-Cloth



Grit P40 - P400	Unit / Box
160 x 14mm	10
160 x 20mm	10

## Nonwoven Flap Wheels

### Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface.

### Applications

- ▣ Fiberglass
- ▣ Metal
- ▣ Paint
- ▣ Plastic

#### Grain

Aluminum Oxide  
Silicon Carbide (SiC)

A. Coarse	A. Medium	A. Fine	A. Very Fine
S. Medium	S. Fine	S. Very Fine	S.U. Fine



Combi Flap	Unit / Box
100 x 50	2
100 x 100	1
150 x 30	3
150 x 50	2
165 x 30	3
165 x 50	2
200 x 30	1
200 x 50	1
250 x 30	1
250 x 50	1
300 x 30	1
300 x 50	1
350 x 30	1
350 x 50	1
350 x 100	1
400 x 30	1
400 x 50	1
400 x 100	1

## Spindle Mounted Nonwoven Flap Wheels

### Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface. It is suitable for use with hand machines.

A. Coarse	A. Medium	A. Fine	A. Very Fine
S. Medium	S. Fine	S. Very Fine	S.U. Fine

Spindle Mounted Nonwoven Mop	Spindle Mounted Combi-Mop	Unit / Box
40 x 20 x 6		50
50 x 20 x 6		20
50 x 30 x 6		20
60 x 15 x 6		20
60 x 30 x 6		20
80 x 40 x 6		9
80 x 50 x 6		9



Jewelry mop	Nonwoven	Combi	Abrasive
			100 x 10
			100 x 15
			100 x 20
			100 x 30



## Nonwoven Rolls

### Product Features

Suitable for hand use in surface development applications.

Nonwoven Rolls	A.	Alox	Red
A.COARSE	S.	Sic	Black/Gray
A.MED	Z.	ZR	Blue
A.FINE			
A.V.FINE	<b>Coarse</b>		P100 - P120
S.MED	<b>Medium</b>	Medium	P180 - P220
S.FINE	<b>Fine</b>	Thin	P280 - P320
S.V.FINE	<b>Very Fine</b>	Very Thin	P320 - P360
S.U.FINE	<b>Ultra Fine</b>	Ultra Thin	P500 - P600



## Nonwoven Discs And Sheets



Nonwoven	Sheet	Sheet	Disc Diameter	Unit / Box
A.COARSE	230 x 280	158 x 224	150	10
A.MED				
A.FINE				
A.V.FINE				
S.MED				
S.FINE				
S.V.FINE				
S.U.FINE				

# Flap Discs




Professional products with long life and high abrasion capacity.

## Zirconia alumina cloth

Aggressive zirconia alumina grit.

## Ceramic aluminium oxide + Multibond

Ceramic high Performance grit.

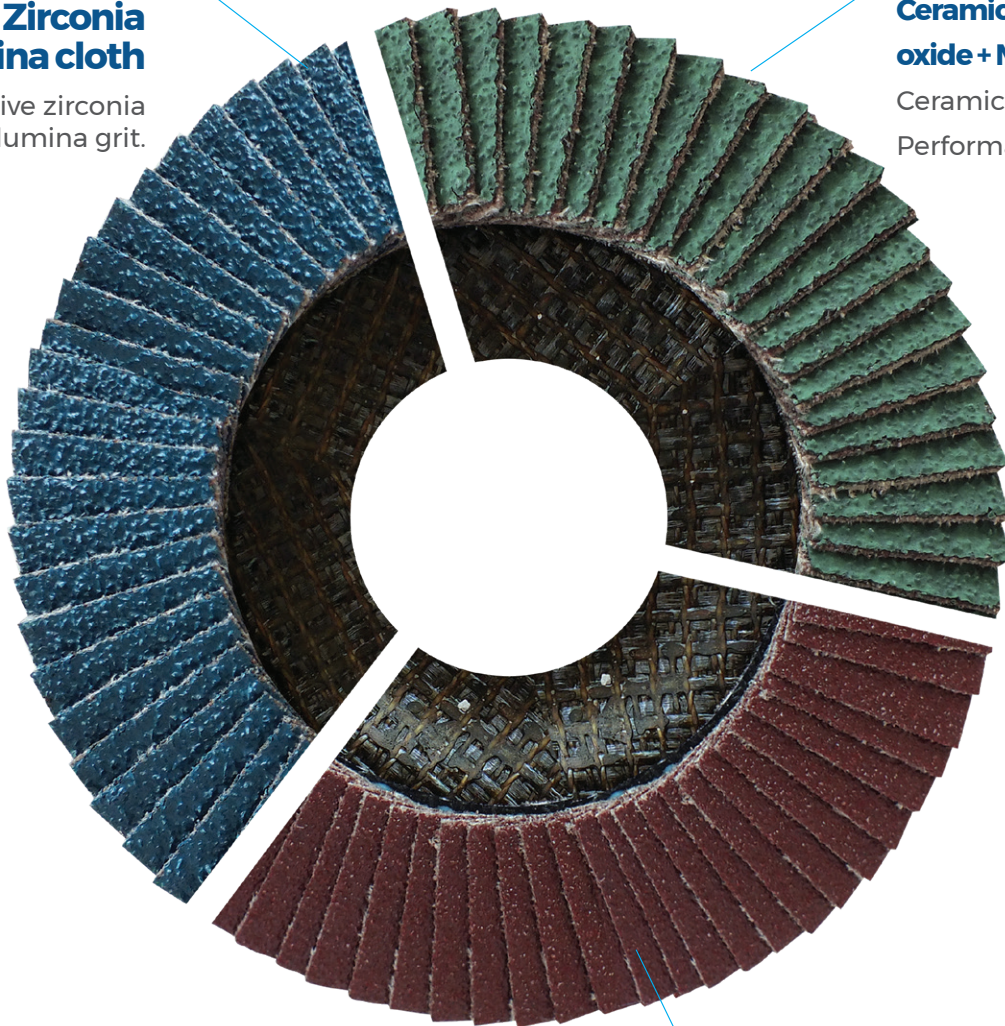

## Aluminium oxide cloth

Durable grit aluminium oxide.

## Egebant Alox

### Product Features

Ideal for metal surfaces and weld abrasion applications.

### Applications

- Metal
- Weld



Grain	Backing Plate	Sizes
Aluminium Oxide	Glass Fibre	115x22 125x22 180x22

Grit				
P36	P40	P60	P80	P120

## Egebant ZR

### Product Features

Ideal for metal surfaces and weld abrasion applications.

High stock removal performance thanks to its zirconia mineral.

### Applications

- Stainless Steel



Grain	Backing Plate	Sizes
Zirconia	Glass-Fibre	115x22 125x22 180x22

Grit				
P36	P40	P60	P80	P120

# Flap Discs

## Egebant ZR Extra

### Product Features

It has high abrasiveness and is durable and long-lasting. This product is especially ideal on steel and stainless steel surfaces.

### Applications

- Weld
- Deburring
- Metal



Grain	Backing Plate	Sizes
Zirconia alumina	Glass Fibre	115x22 125x22 180x22

Crit
P36   P40   P60   P80   P120

## Egebant SER

### Product Features

It is long-lasting, durable, and has a high level of abrasiveness.

### Applications

- Stainless Steel
- Weld
- Deburring
- Metal



Grain	Backing Plate	Sizes
Ceramic Aluminium Oxide	Glass Fibre	115x22 125x22 180x22

Crit
P36   P40   P60   P80   P120

## Sander Alox

### Product Features

Ideal for metal surfaces and weld abrasion applications.

### Applications

- Metal
- Weld



Grain	Backing Plate	Sizes
Aluminium Oxide	Glass Fibre	115x22 125x22 180x22

Grit				
P36	P40	P60	P80	P120

## Sander ZR

### Product Features

Ideal for metal surfaces and weld abrasion applications.

High stock removal performance thanks to its zirconia mineral

### Applications

- Stainless Steel



Grain	Backing Plate	Sizes
Zirconia al. / Al. oxide	Plastic Glass Fibre reinforced	115x22 125x22 180x22

Grit				
P36	P40	P60	P80	P120

## Radial Discs

### Radial CSD Disc

#### Product Features

For scraping paint and varnish, removing rust and satin used.

It is suitable for use with angle grinder machine.



#### Applications

- ▣ Fiberglass
- ▣ Metal
- ▣ Paint
- ▣ Plastic

Grain	Color	Sizes
Silicon Carbide (SiC)	Black	100x22
	Blue	115x22
		125x22
		150x22
		180x22

### Radial Nonwoven Disc

#### Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface. It is suitable for use with angle grinder machine

#### Applications

- ▣ Metals



Grain	Sizes	Grit
Aluminium Oxide, Silicon Carbide (SiC)	115x20	A. Fine, A. Very Fine, S. Fine, S. Very Fine, S. Ultra Fine

### Radial Abrasive Disc

#### Product Features

It is used for light stock removal without leaving deep lines.

#### Applications

- ▣ Metals
- ▣ Stainles Steel
- ▣ Steel



Grain	Grit	Sizes
Aluminium Oxide	60-400	115x22-125x22

## Quick Change Abrasives

### Product Features

Easy to change used with rotary sander machines for grinding finishing and deburring on metal wood and plastics.



Diameter	Mineral	Grain	Grit	Unit / Box
30 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Nonwoven	24-400	100
50 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Fiber, Nonwoven	24-400	
75 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Fiber, Nonwoven	24-400	
100 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Fiber, Nonwoven	24-400	

## Drum Abrasives

### Product Features

It is suitable for use in processes such as surface development and deburring. It has a wide application area thanks to different grit sizes and sandpaper options.









# egebant®

## Headquarter

A: TOSB 3. Cadde No: 23 Pk. 41420

Sekerpinar, Cayirova/Kocaeli

T: +90 262 679 1313

F: +90 262 679 1300

E: info@egebant.com.tr

[www.egebant.com.tr](http://www.egebant.com.tr)



/egebant



/egebantcom



/Egebant



/Egebant



/EgebantComTr