

**PRODUCT
CATALOG**





egeban

10
SIZE

3 3 1 3 3 4
SanCut
EN 388
AKA2D
EN 407:2004
XXXXX



PERSONAL PROTECTIVE EQUIPMENT

www.egebant.com.tr

General Work Gloves

Applications

- Construction
- Mechanical assembly
- Oily environment
- Gardening
- General handling



Nitrile Coated General Work Gloves



SanSoft NP01

Coating Material	Nitrile
Liner Material	Cotton
Coating/Liner Color	Yellow/Ecru
Sizes	8, 9, 10



SanSoft NP01 Blue

Coating Material	Nitrile
Liner Material	Cotton
Coating/Liner Color	Blue/Ecru
Sizes	8, 9, 10



SanSoft NP02

Coating Material	Nitrile
Liner Material	Cotton
Coating/Liner Color	Yellow/Ecru
Sizes	9, 10



SanSoft NP02 Blue

Coating Material	Nitrile
Liner Material	Cotton
Coating/Liner Color	Blue/Ecru
Sizes	9, 10



Dry and Less Oily Applications

Series 111



General Properties

Assembly gloves; light weight, higher fingertip sensitivity, thin structure and good fit to hands, perfect price / performance ratio

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance

SanFit 111330

Coating	Micro Foam PU
Coating Color	Black
Liner	Polyester
Liner Color	Black
Gauge	13G
Palm Thickness	0.80 mm



General Properties

It is produced by coating thin, breathable and durable Polyurethane (PU) on a durable polyester lining. While protecting your hand against mechanical risks, it does not compromise fingertip sensitivity. It makes it easier to hold dry and less oily parts compared to holding with bare hands.



Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance

SanFit 111220

Coating	Polyurethane
Coating Color	White
Liner	Polyester
Liner Color	White
Gauge	13G
Palm Thickness	0.80 mm



PU Coated Precision Assembly Gloves



SanFit 111230

Coating	Micro Foam PU
Coating Color	Black
Liner	Polyester
Liner Color	White
Gauge	13G
Palm Thickness	0.80 mm



Series 161

General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, comfortable, fits adaptively to hands.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance



SanFit 161330

Coating	Micro Foam PU
Coating Color	Black
Liner	Polyester
Liner Color	Black
Gauge	13G
Palm Thickness	1.00 mm



Lightweight ■ Moderate Resistance ■ High Level of Comfort ■ Good Fit to Hands ■ High Resistance ■ Silicone-Free



PU Coated Precision Assembly Gloves



SanFit 161240

Coating	Micro Foam PU
Coating Color	Grey
Liner	Polyester
Liner Color	White
Gauge	13G
Palm Thickness	1.00 mm



General Properties

It is produced with a thin, breathable and durable Polyurethane coating on electrostatic discharge protection featured carbon lining. Thanks to its thin and durable structure, it provides maximum protection and abrasion resistance without sacrificing fingertip sensitivity and comfort. It makes it easier to hold dry and less oily parts compared to holding with bare hands.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance, assembly of electrical/electronic components



SanFit 721740

Coating	Polyurethane
Coating Color	Grey
Liner	Carbon & Nylon & Spandex
Liner Color	Blue & Black Melange
Gauge	18G
Palm Thickness	1.00 mm



General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance



SanFit 121220

Coating	Micro Foam PU
Coating Color	White
Liner	Polyamide
Liner Color	White
Gauge	13G
Palm Thickness	0.90 mm



SanFit 121330

Coating	Micro Foam PU
Coating Color	Black
Liner	Polyamide
Liner Color	Black
Gauge	13G
Palm Thickness	0.90 mm



PU Coated Precision Assembly Gloves

Series 121



SanFit 121440

Coating	Micro Foam PU
Coating Color	Grey
Liner	Polyamide
Liner Color	Grey
Gauge	13G
Palm Thickness	0.90 mm



Series 166

General Properties

Working gloves; ultra-light weight, offering maximum fingertip sensitivity, easily tearable.

Areas of Usage

Light assembly works, working with small pieces and applications for which the fingertip sensitivity is very important.



SanFit 166330

Coating	Micro Foam PU
Coating Color	Black
Liner	Polyester & Elastane
Liner Color	Black
Gauge	18G
Palm Thickness	0.50 mm



Nitrile Foam Coated Precision Assembly Gloves

Series **371**

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.



Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance



SanFoam 371731

Coating	Foam Nitrile
Coating Color	Black
Liner	Nylon&Spandex
Liner Color	Grey & Black Melange
Gauge	15G
Palm Thickness	0,90 mm



Series **521**

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.



Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance



SanFoam 521241

Coating	Delight Nitrile Foam
Coating Color	Grey
Liner	Polyamide
Liner Color	White
Gauge	15G
Palm Thickness	0.80 mm



Lightweight ■ High Degree of Gripping ■ High Level of Comfort ■ Moderate Resistance ■ High Resistance ■ Good Fit to Hands



Nitrile Foam Coated Precision Assembly Gloves

Series **521**



SanFoam 521331

Coating	Delight Nitrile Foam
Coating Color	Black
Liner	Polyamide
Liner Color	Black
Gauge	15G
Palm Thickness	0.90 mm



SanFoam 521431

Coating	Delight Nitrile Foam
Coating Color	Black
Liner	Polyamide
Liner Color	Grey
Gauge	15G
Palm Thickness	0.90 mm



Nitrile Foam Coated Precision Assembly Gloves

Series **521**



SanFoam 521731

Coating	Delight Nitrile Foam
Coating Color	Black
Liner	Polyamide
Liner Color	Black & White Melange
Gauge	15G
Palm Thickness	0.90 mm



SanFoam 521530

Coating	Delight Nitrile Foam
Coating Color	Black
Liner	Polyamide
Liner Color	Red
Gauge	15G
Palm Thickness	0.80 mm



Thin ■ High Degree of Gripping ■ High Resistance ■ Lightweight ■ Moderate Resistance ■ High Level of Comfort



Nitrile Foam Coated Precision Assembly Gloves

Series **571**

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort, fits adaptively to hands and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.



SanFoam 571241

Coating	Delight Nitrile Foam
Coating Color	Grey
Liner	Nylon & Spandex
Liner Color	White
Gauge	15G
Palm Thickness	1.00 mm



SanFoam 571331

Coating	Delight Nitrile Foam
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Black
Gauge	15G
Palm Thickness	1.00 mm



Nitrile Foam Coated Precision Assembly Gloves

Series **571**



SanFoam 571431

Coating	Delight Nitrile Foam
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Grey
Gauge	15G
Palm Thickness	1.00 mm



SanFoam 571731

Coating	Delight Nitrile Foam
Coating Color	Black
Liner	Nylon & Spandex
Liner Color	Grey & Black Melange
Gauge	15G
Palm Thickness	1.00 mm



High Resistance ■ High Level of Comfort ■ High Degree of Gripping ■ Good Fit to Hands



Nitrile Foam Coated Precision Assembly Gloves

General Properties

It is produced by coating thin, breathable and durable Foam Nitrile on electrostatic discharge protection featured carbon lining. Thanks to its flexible structure, it fits very well in the hand and facilitates delicate work. It makes it easier to hold dry and less oily parts compared to holding with bare hands.



Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance, assembly of electrical/ electronic components



SanFoam 821740

Coating	Foam Nitrile
Coating Color	Grey
Liner	Carbon - Nylon & Spandex
Liner Color	Blue & Black Melange
Gauge	18G
Palm Thickness	1,00 mm



Uncoated Precision Assembly Gloves

General Properties

Gloves lining made of polyamide threads high level of flexibility and permeability.



Areas of Usage

Surface control treatments, general usage, special applications.



SanFit 020200

Coating	Uncoated
Liner	Nylon
Liner Color	White
Gauge	15G
Palm Thickness	0,70 mm



General Properties

Working gloves; resistant to working with abrasive parts with extra durable PU coating, allowing for gripping hard pieces without pressure on hands with discontinuous finer structure, resistant to cuts.

Areas of Usage

General handling, working with metal pieces, material handling, rough assembly, heavy material handling.



SanCut 131242

Coating	PU Extra
Coating Color	Grey
Liner	HPPE Spun & Polyester & Glass Fiber
Liner Color	White
Gauge	15G
Palm Thickness	1.00 mm



EN 420

EN 407:2004



X1XXXX

EN 388:2016



4X42B



SanCut 131742

Coating	PU Extra
Coating Color	Grey
Liner	HPPE Spun & Polyester & Glass Fiber
Liner Color	Black & White Melange
Gauge	15G
Palm Thickness	1.00 mm



EN 420

EN 407:2004



X1XXXX

EN 388:2016



4X42B



PU Coated Cut Resistant Gloves

Series 131



SanCut 131744

Coating	PU Extra
Coating Color	Grey
Liner	HPPE Spun & Polyester & Steel Fiber
Liner Color	Black & White Melange
Gauge	13G
Palm Thickness	1.10 mm



Series 141

General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.

Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.



SanCut 141243

Coating	Micro Foam PU
Coating Color	Grey
Liner	HPPE Spun & Polyester & Glass Fiber & Spandex
Liner Color	White
Gauge	13G
Palm Thickness	1.00 mm



PU Coated Cut Resistant Gloves

Series **141**



SanCut 141743

Coating	Micro Foam PU
Coating Color	Grey
Liner	HPPE Spun & Polyester & Glass Fiber & Spandex
Liner Color	Black & White Melange
Gauge	13G
Palm Thickness	1.00 mm



SanCut 141745

Coating	Polyurethane(PU)
Coating Color	Grey
Liner	HPPE, Glass Fiber, Steel Fiber, Polyester and Spandex
Liner Color	White & Black Melange
Gauge	13G
Palm Thickness	1.00 mm



High Resistance



PU Coated Cut Resistant Gloves

Series **181**

General Properties

Thanks to Dyneema Diamond Technology; light weight, comfortable durable and highly flexible cut resistant gloves.

Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.



SanCut 181242

Coating	Micro Foam PU
Coating Color	Grey
Liner	Dyneema Diamond & Polyamide
Liner Color	White
Gauge	15G
Palm Thickness	0.90 mm



SanCut 181743

Coating	Micro Foam PU
Coating Color	Grey
Liner	Dyneema Diamond & Polyamide
Liner Color	Blue & White Melange
Gauge	15G
Palm Thickness	0.90 mm



General Properties

High fingertip sensitivity cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.



SanCut 191732

Coating	Micro Foam PU
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Blue & Black Melange
Gauge	18G
Palm Thickness	0.70 mm



SanCut 191733

Coating	Micro Foam PU
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0.70 mm



PU Coated Cut Resistant Gloves

Series **191**



SanCut 191746

Coating	Micro Foam PU
Coating Color	Grey
Liner	Steel Fiber & HPPE & Polyamide & Glass Fiber
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,90 mm



SanCut 191734

Coating	Micro Foam PU
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0.75 mm



Nitrile Foam Coated Cut Resistant Gloves

Series **101**

General Properties

It is produced by coating PU on a thin and heat-resistant HPPE fiber and polyester blend lining. TDM 100 provides D level cut resistance according to ISO 13997 test. It makes it easier to hold dry and less oily parts compared to holding with bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.



Areas of Usage

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications



SanFit 101744

Coating	Polyurethane
Coating Color	Grey
Liner	Steel Fiber, HPPE, Polyester, Coton
Liner Color	Black-White & Yellow Melange
Gauge	13G
Palm Thickness	1,15 mm



General Properties

Usable under dry and low-oil working conditions where there is a risk of cuts. Offers a comfortable working opportunity as it has a thin structure and fits well hands.



Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



SanCut 331732

Coating	Foam Nitrile
Coating Color	Black
Liner	HPPE Spun & Polyester & Glass Fiber
Liner Color	Black & White Melange
Gauge	15G
Palm Thickness	1,00mm



High Resistance ■ High Degree of Gripping ■ Compatible with Use on Touch Screens



Nitrile Foam Coated Cut Resistant Gloves

Series **331**



SanCut 331734

Coating	Foam Nitrile
Coating Color	Black
Liner	HPPE Spun & Polyester & Steel Fiber
Liner Color	Black & White Melange
Gauge	13G
Palm Thickness	1,00 mm



SanCut 331334

Coating	Foam Nitrile
Coating Color	Black
Liner	HPPE Spun & Polyester & Steel Fiber
Liner Color	Black
Gauge	13G
Palm Thickness	1,00 mm



Nitrile Foam Coated Cut Resistant Gloves

Series **341**

General Properties

Double layer knitting with specially designed and reinforced yarns against cut. High grip NBR foam coating and very good dexterity.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



SanCut 341734

Coating	Foam Nitrile
Coating Color	Black
Liner	HPPE & Glass Fiber & Polyamide
Liner Color	Navy Blue & White Melange
Gauge	18G
Palm Thickness	1.00 mm



Series **351**

General Properties

Combination of foam nitrile coating that has a higher degree of gripping, with aramid knit that is thin and resistant to heat and cuts.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



SanCut 351734

Coating	Foam Nitrile
Coating Color	Black
Liner	Aramid & Steel Fiber & Polyester
Liner Color	Yellow & Black Melange
Gauge	15G
Palm Thickness	1,10 mm



High Resistance ■ High Degree of Gripping ■ Compatible with Use on Touch Screens



Nitrile Foam Coated Cut Resistant Gloves

Series **381**

General Properties

Precision working gloves; made of dyneema liner, light, comfortable, durable and allowing for maximum mobility, higher degree of gripping, resistant to cuts.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



SanCut 381632

Coating	Foam Nitrile
Coating Color	Black
Liner	Dyneema Diamond & Polyamide
Liner Color	Blue & White Melange
Gauge	18G
Palm Thickness	0,90 mm



SanCut 381633

Coating	Foam Nitrile
Coating Color	Black
Liner	Dyneema Diamond & Polyamide
Liner Color	Navy Blue & White Melange
Gauge	18G
Palm Thickness	1,00 mm



Nitrile Foam Coated Cut Resistant Gloves

Series **391**

General Properties

High grip cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.



SanCut 391732

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester Blue & White Melange
Liner Color	18G
Gauge	0.90 mm
Palm Thickness	



SanCut 391733

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester Black & White Melange
Liner Color	18G
Gauge	0.90 mm
Palm Thickness	



Thin ■ High Resistance ■ High Degree of Gripping



Nitrile Foam Coated Cut Resistant Gloves

Series **391**



SanCut 391734

Coating	Foam Nitrile
Coating Color	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,95 mm



EN 21420

EN 388:2016



4X44D



General Properties

Gloves lining manufactured using cut resistant threads. High level of flexibility and permeability.

Areas of Usage

Surface control treatments, general usage, special applications.



SanCut 040703

Coating	Uncoated
Liner	HPPE Spun & Polyester & Glass Fiber & Spandex
Liner Color	Black & White Melange
Gauge	13G
Palm Thickness	0,80 mm



EN 420

EN 388:2016



1X41C

EN 407:2004



X1XXXX



SanCut 030704

Coating	Uncoated
Liner	HPPE Spun & Steel Fiber Black & White Melange
Liner Color	13G
Gauge	0,80 mm
Palm Thickness	



EN 420

EN 388:2016



1X42D

EN 407:2004



X1XXXX

Breathable



Uncoated Gloves



SanCut 050103

Coating	Uncoated
Liner	Aramid, Glass Fiber, Flame Resistant Acrylic
Liner Color	Yellow
Gauge	13G
Palm Thickness	1,03 mm



Special Purpose Gloves

General Properties

Glove liners manufactured using cut resistant threads, with finger bottoms softened. These gloves offer a level D cut-resistance, and the finger sections are easily removable. This ensures that the finger sections are easily removed when being caught while working.

Areas of Usage

Surface control treatments, general usage, special applications.



SanCut 096704

Coating	Uncoated
Liner	HPPE & Nylon & Steel Fiber
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0.60 mm





SanCut 396734

Coating	Foam Nitrile
Coating Color	Black
Liner	HPPE & Steel Fiber & Nylon
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	1.1 mm



Series **196**

General Properties

It is produced by applying polyurethane coating on HPPE lining reinforced with stainless steel fiber. It is designed for special applications. While TDM 100 provides D level cut resistance according to ISO 13997 test, it does not compromise fingertip sensitivity. The finger parts of the glove are designed to break easily if caught somewhere.

Areas of Usage

Surface control treatments, general usage, special applications.



SanCut 196734

Coating	Micro Foam PU
Coating Color	Black
Liner	HPPE & Nylon & Polyester & Steel Fiber
Liner Color	Black & White Melange
Gauge	18G
Palm Thickness	0,90 mm



Chemical Gloves

Applications

- Paint Shops
- Chemical Plants
- Pharmaceutical Industry
- Laboratory And Health Sector





NL 15

Nitrile Gloves

Material	Acrylonitrile & Butadiene Rubber
Internal Coating	Yes (Flock)
Thickness	0,42 mm
Length	32 cm



EN 420

EN 388:2016



4101X

EN 374



AJKLOT



NEO400

Neoprene Chemical Gloves

Material	Chloroprene & Natural Rubber
Internal Coating	Yes (Flock)
Thickness	0,70 mm
Length	33 cm



EN 420

EN 388:2016



2111X

EN 374



BKLDPT

Chemical Gloves Selection Guide



CHEMICALS	NEO400		NL15	
	AVERAGE BTT (Min)	Performance Ratio	AVERAGE BTT (Min)	Performance Ratio
1. Acetaldehyde, 99,5%	8	Weak		-
2. Acenic Acid, 99+%	152	Perfect		-
3. Acetone, 99,5%	11	Suitable	5	Not Recommend
4. AcetoNitrile, 99%	15	Perfect	5	Weak
5. Acrylic Acid, 99%	66	Weak		-
6. Ammonuim Flouride, 40%	>480	Perfect	>480	Perfect
7. Ammonuim Hydroxide, 85%	>480	Perfect	320	Good
8. Amyl Acetate, 100%		Perfect		-
9. Amyl Alcohol, 99+%		Perfect		Perfect
10. Aniline, 99 + %	138	Weak	>480	Perfect
11. Aqua Regia	69	Weak	10	Not Recommend
12. Benzaldehyde, 99,5%	>480	Perfect	280	Perfect
13. Bromopropionic Acid Sat.	>480	Perfect	5	Not Recommend
14. Butyl Acetate, 99+%		-	>480	Good
15. Butyl Alcohol, 99%	135	Perfect	>480	Perfect
16. Butyl Cellosolve, 99%	63	Good	>480	Perfect
17. Butyrolactone, 99%	170	Perfect		-
18. Carbon Disulfide, 99,9%		-	10	Weak
19. Carbon Tetrachloride, 99+%		-	>480	Good
20. Cellosolve Acetate, 99+%	37	Not Recommend		-
21. Chromic Acid, 50%		-	>480	Good
22. Citric Acid, 10%	>480	Perfect	>480	Good
23. Cyclohexanol, 98%	392	Perfect	>480	Good
24. Diacetone Alcohol, 99%	96	Perfect	180	Suitable
25. Dibutyl Phthalate, 99%	>480	Good	>480	Perfect
26. Diethylamine, 99+%		-	5	Weak
27. Diisobutyl Ketone, 80%		-	>480	Good
28. Dimethyl Acetamide, 99+%		-		-
29. N,N-Dimethylformamide, 99+%	38	Suitable		-
30. Dimethyl Sulfoxide, 99+%	243	Suitable		-
31. Dioctyl Phthalate, 99%	>480	Good	>480	Suitable
32. 1, 4-Dioxane, 99,9%		-		-
33. Epichlorohydrin, 99+%		-		-
34. Ethyl Acetate, 99+%	10	Not Recommend	5	Not Recommend
35. Ethyl Alcohol, 90%	73	Perfect	293	Perfect
36. Ethyl Ether, 99%	4	Not Recommend		-
37. Ethyl Glycol Ether, 99%	68	Perfect	>480	Good
38. Ethylene Glycol, 99%	>480	Perfect		-
39. Formaldehyde, 99%	>480	Perfect	>480	Perfect
40. Formic Acid, 95+%	>480	Perfect		-
41. Freon TF, 99+%	160	Not Recommend	>480	Good
42. Furfural, 99%	35	Suitable		-
43. Gasoline, White, 100%		-	>480	Perfect
44. Gluterlaldehyde, 5%		-	>480	Perfect
45. Hexamethyldisilazine, 97%	153	Weak	>480	Perfect
46. Hexane, 99+%	16	Not Recommend	>480	Good
47. Hydrazine, 65%	205	Perfect	388	Good
48. Hydrochloric Acid, 10%	>480	Perfect	>480	Good
49. Hydrochloric Acid, 38%	>480	Perfect		-
50. Hydrofluoric Acid, 48%	>480	Perfect	>480	Good
51. Hydrogen Peroxide, 30%	>480	Perfect	>480	Good

■ Perfect
 ■ Good
 ■ Suitable
 ■ Weak
 ■ Not Recommend

Chemical Gloves Selection Guide



CHEMICALS	NEO400		NL15	
	AVERAGE BTT (Min)	Performance Ratio	AVERAGE BTT (Min)	Performance Ratio
52. Hydroquinone, Sat.	>480	Perfect	>480	Suitable
53. Isobutyl Alcohol, 99+%	183	Perfect	>480	Good
54. Iso-Octane, 99%	92	Not Recommend	>480	Good
55. Isopropyl Alcohol, 99+%	142	Perfect	>480	Good
56. Kerosene, 100%	100	Not Recommend	>480	Perfect
57. Lactic Acid, 85%	>480	Perfect	>480	Good
58. Lauric Acid, 36%	>480	Good	>480	Good
59. Maleic Acid, Saturated	>480	Perfect	>480	Good
60. Methyl Alcohol, 99.9%	40	Perfect	-	-
61. Methylamine, 40%	79	Perfect	480	Suitable
62. Methyl t-Butyl Ether, 99.8%	-	-	393	Good
63. Methyl Cellosolve, 99%	75	Perfect	-	-
64. Methyl Ethyl Ketone, 99+%	-	-	-	-
65. Mineral Spirits, Rule 66, 100%	67	Not Recommend	>480	Good
66. Monoethanolamine, 99%	>480	Perfect	>480	Perfect
67. Morpholine, 99%	-	-	-	-
68. Muriatic Acid, 100%	-	-	>480	Good
69. Naptha VM & P, 100%	35	Not Recommend	>480	Perfect
70. N-Methyl-2-Pyrrolidone, 99+%	-	-	-	-
71. Nitric Acid, 10%	>480	Perfect	>480	Good
72. Nitric Acid, 70%	370	Good	-	-
73. Nitrobenzene, 99%	-	-	-	-
74. Nitromethane, 95.5%	22	Perfect	-	-
75. Nitropropane, 95.5%	26	Weak	-	-
76. Octyl Alcohol, 99+%	275	Perfect	>480	Good
77. Oleic Acid, 99+%	>480	Perfect	>480	Good
78. Oxalic Acid, 12.5%	>480	Perfect	>480	Good
79. Palmitic Acid, Sat.	>480	Perfect	-	-
80. Pentachlorophenol, 35%	>480	Perfect	-	-
81. Pentane, 98%	13	Not Recommend	>480	Perfect
82. Perchloric Acid, 60%	>480	Perfect	>480	Suitable
83. Phenol, 90%	108	Good	-	-
84. Phosphoric Acid, 85%	>480	Perfect	>450	Suitable
85. Potassium Hydroxide, 50%	>480	Perfect	>480	Suitable
86. Propyl Acetate, 99%	-	-	-	-
87. Propyl Alcohol, 96+%	75	Perfect	>480	Good
88. Pyridine, 99%	-	-	-	-
89. Rubber Solvent, 100%	15	Not Recommend	>480	Good
90. Sodium Hydroxide, 50%	>480	Good	>480	Suitable
91. Stoddard Solvent, 99%	62	Not Recommend	>480	Good
92. Sulfuric Acid, 47%	>480	Perfect	>480	Suitable
93. Sulfuric Acid, 95%	260	Perfect	-	-
94. Tannic Acid, 37.5%	>480	Perfect	>325	Good
95. 1,1,2,2-Tetrachloroethane, 99%	-	-	-	-
96. Tetrachloroethylene, 100%	-	-	350	Not Recommend
97. Toluene, 99+%	-	-	19	Weak
98. 1,1,1-Trichloroethane	-	-	-	-
99. Tricresyl Phosphate, 90%	-	Good	330	Suitable
100. Triethanolamine, 85%	-	-	-	-
101. Turpentine, 100%	-	-	>480	Suitable
102. Xylene, 99%	-	-	64	Suitable

■ Perfect
 ■ Good
 ■ Suitable
 ■ Weak
 ■ Not Recommend





Safety Helmet



General Features

Products with EN 397 standard should be used for head protection. Different color options can be preferred in order to the employees in different departments in the enterprises (Blue, White, Yellow, Green, Red, Orange)

In metal splashes, attention should be paid to the MM sign while selecting the helmet.

Applications

- ☐ Automotive
- ☐ Construction
- ☐ Metal industry
- ☐ Logistic
- ☐ Shipyards





EB01

Safety Helmet - Manuel

- Bidirectional ventilation hole provides maximum comfort
- Thanks to adjustable neckband, it can adjust for head sizes manually.
- Rain gutter available
- Use with headphones and viewfinder

Areas of Usage

Construction Sector, Logistics Sector, Automotive Industry



EB02

Safety Helmet with ratchet

- Bidirectional ventilation hole provides maximum comfort
- Thanks to adjustable neckband, it can adjust for head sizes
- Rain gutter available
- Use with headphones and viewfinder

Areas of Usage

Construction Sector, Logistics Sector, Automotive Industry

Dust Masks



General Features

It can be folded and conically divided into two models. The conical models fit in a wide range of face sizes with outwardly protruding shape. Foldable models provide easy storage and prevent contamination. Dust masks are classified as protection class FFP1, FFP2 and FFP3.

Applications

- ▣ Automotive
- ▣ Build
- ▣ Cement
- ▣ Mine
- ▣ Food
- ▣ Medicine
- ▣ Welding Works





SMC

Series of Dust Masks

- Reinforced body structure
- Improved comfort nose clip does not break its structure when used again
- Maximum comfort thanks to nose support
- There are FFP1 and FFP2 Protection Levels
- Thanks to improved ventilation system hot air and breath out easily
- It has a dolamit test
- It has high filtration and low respiratory resistance
- Easy to carry, foldable mask

Models

- SMC 01 FFP1, NR, D
- SMC 11 FFP1, NR, D Valve
- SMC 11S FFP1, NR, D Valve, Nose Support
- SMC 12S FFP2, NR, D Valve, Nose Support



SME

Series of Dust Masks

- It has rubber structure and it doesn't contain latex
- Improved comfort nose clip does not break its structure when used again
- There are FFP1, FFP2 and FFP3 Protection Levels
- Thanks to improved ventilation system hot air and breath out easily.
- It has a dolamit test.
- It has high filtration and low respiratory resistance.
- Easy to carry, foldable mask.

Models

- SME 01 FFP1, NR, D
- SME 11 FFP1, NR, D, Valve
- SME 12 FFP2, NR, D, Valve
- SME 13S FFP3, NR, D, Valve, Nose Support



SMA

Series of Dust Masks

- It has rubber structure and it doesn't contain latex
- It has a very good insulation structure without clips in the nose area
- It has dolamit test
- Thanks to improved ventilation system hot air and breath out easily
- It has high filtration and low respiratory resistance
- Easy to carry, foldable mask

Models

- SMA 11 FFP1, NR, D, Valve
- SMA 12S FFP2, NR, D, Valve, Nose Support





ADHESIVE TAPES

Adhesive Tapes



Packaging Tapes

Product Features

General purpose packaging tape.

It is suitable for light and medium weight carton closure.

Suitable for use with hand-held dispenser and automatic packaging machines

Can be produced at any desired width and length



Product Code	Carrier	Adhesive Type	Color	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Sander PP5231	BOPP	Synthetic Rubber	Transparent / Brown / White	25 mic.	145	60	General purpose packaging tape.
Egebant PP31	BOPP	Synthetic Rubber	Transparent / Brown / White	28 mic.	145	60	General purpose packaging tape.
Egebant PP30S	BOPP	Natural Rubber	Transparent / Brown / White	28 mic.	145	60	General purpose packaging tape.
Egebant PP35	BOPP	Natural Rubber	Transparent / Brown / White	35 mic.	145	60	General purpose packaging tape.
Egebant PVC 330	PVC	Natural Rubber	Transparent / Brown / White	33 mic.	145	60	General purpose packaging tape.
Egebant Kraft Tape	Kraft Paper	Natural Rubber	Brown	105 mic.	6	60	General purpose packaging tape.



Masking Tapes

Product Features

- Can be removed without leaving a residue
- Solvent-resistant
- Temperature resistance
- Easy tear
- Controlled expansion
- Conformability to stretch and adhere round curves
- High initial adhesion



Product Code	Carrier	Adhesive Type	Thickness	Temperature Resistance (°C)	Application Areas
Sander 6127	Crepe Paper	Natural Rubber	110 mic.	30	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant MSK60	Crepe Paper	Natural Rubber	125 mic.	80 (30')	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant MSK6280	Crepe Paper	Natural Rubber	130 mic.	100 (30')	High heat resistance, wet sanding and tiner-like chemical resistance, a general purpose masking tape. Up to 100 degree heat resistance.
Egebant MSK100	Waterproof Crepe Paper	Natural Rubber	140 mic.	120 (30')	General purpose masking tape. Very high heat resistance, resistant to wet sanding and filling materials, thinner infrared light, durable and resistant to chemicals. Up to 120 degrees heat resistance
Egebant P40	PET	Silicon	60 mic.	180 (30')	High-Temperature powder paint masking tape.
Egebant 6268	Crepe Green Paper	Natural Rubber	125 mic.	80 (30')	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant 6265	Crepe Blue Paper	Natural Rubber	125 mic.	80 (30')	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant 6267	Crepe Orange Paper	Natural Rubber	125 mic.	80 (30')	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Maskopri	Paper HDPE Film	Natural Rubber	125 mic.	80 (30')	The film is electrostatically loaded to stick to whole surface. Recommended for professional, industrial and DIY applications.

Egebant Colored Masking Tape



Product Code	Colors	Adhesive Type	Temperature Resistance (°C)	Application Areas
Egebant 25 x 50	Blue, Orange, Green, White	Natural Rubber	80	General purpose masking tape. Construction industry, automotive industry, white goods industry and cable bundling.
Egebant 50 x 50				

Duct Tapes

Product Features

- Hand-tearable
- Moisture resistant
- Can adhere to most surfaces
- High tensile strength
- Waterproof, suitable for many repair applications.



Product Code	Carrier	Adhesive Type	Color	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Egebant TPL201	PE Coated Cloth	Synthetic Rubber	Black / White / Gray	180 mic.	10	60	It is a general purpose cloth tape.
Egebant TPL204	PE Coated Cloth	Synthetic Rubber	Gray	155 mic.	13	60	It is a multi-purpose, single-sided repair tape.
Egebant CTI604	PE	Synthetic Rubber	Gray	160 mic.	10	60	General purpose cloth tape.

Strapping Tapes

Product Features

No residue left on the surface after sticking.

Used for strapping plastic and metal parts in White Goods Industry.

High UV resistance.



Product Code	Carrier	Adhesive Type	Color	Thickness	Temperature Resistance (°C)	Application Areas
Egebant PP505	MOPP	Natural Rubber	White	70 mic.	60	General-purpose strapping tape.
Egebant PP550	MOPP	Natural Rubber	Blue / White	55 mic.	60	General-purpose strapping tape.
Egebant PP855	MOPP	Natural Rubber	Blue	113 mic	60	General-purpose strapping tape.
Egebant PP850	MOPP	Natural Rubber	Blue / White	113 mic.	60	General-purpose strapping tape.

Filament Tapes

Product Features

Reinforced with glass fiber packaging and bundling tape.



Product Code	Carrier	Adhesive Type	Color	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Egebant FG10	Reinforced with fiberglass BOPP	Synthetic Rubber	Clear / White	120 mic.		60	Flat braided, palletizing tape
Egebant FGBD	Reinforced with fiberglass BOPP	Synthetic Rubber	Clear / White	120 mic.		60	Cross-linked palletizing tape
Egebant ST300	MOPP	Synthetic Rubber	Clear	50 mic.		60	Food and beverage packages transport band is used as
Egebant GL96	Fiberglass	Silicon	White	165 mic.	3,5	250	Glass fiber with high temperature resistance, one side is reinforced cloth tape.

Aluminium Tapes

Product Features

High resistance to moisture and chemicals

Thermal conductivity

Heat and light reflectance

Flame resistance

Strength of the external environment

Vibration damping and isolation



Product Code	Carrier	Adhesive Type	Color	Thickness	Tensile Strength	Temperature Resistance (°C)	Application Areas
Egebant AF1825	Al.Foil	Acrylic	Metallic Gray	18 mic.	40	150	18 mic. Aluminium tape
Egebant AF3025	Al.Foil	Acrylic	Metallic Gray	30 mic.	40	150	30 mic. Aluminium tape
Egebant AF4025	Al. Foil	Acrylic	Metallic Gray	40 mic.	40	150	40 mic. Aluminium tape
Egebant AF5025	Al. Foil	Acrylic	Metallic Gray	50 mic.	40	150	50 mic. Aluminium tape
Egebant AF7525	Al. Foil	Acrylic	Metallic Gray	75 mic.	60	150	75 mic. Aluminium tape
Egebant TT9934	Al. Foil	Acrylic	Metallic Gray	150 mic.	275	150	150 mic. Aluminium tape
Egebant TT9940	BOPP - Al. Foil	Acrylic	Metallic Gray	90 mic.	105	150	It is a BOPP coated adhesive aluminium tape having high tensile strength. Used in white goods sector and aluminium panels bonding.
Egebant AF5025	VL-Al.Foil	Acrylic	Metallic Gray	90 mic.	40	120	HVAC

Double Sided Tapes

Product Features

High initial adhesion

Easy to tear by hand

Designed to bond to low surface energy plastic



Product Code	Carrier	Adhesive Type	Color	Thickness (mic.)	Temperature Resistance (°C)	Application Areas
Egebant TNT710	Non Woven	Synthetic Rubber	Translucent	100	60	Usually laminated foam operations, cardboard, metal and adding used.
Egebant D022A	Non Woven	Acrylic	Translucent	100	120	For general purposes, wood, metal, glass, paper, plastic used for welding
Egebant 6750	Non Woven	Acrylic	Blue	100	200	Has a high initial adhesive strength and high-speed coil Adding used
Egebant 8160	PET	Acrylic	Clear	120	100	General purpose
Egebant D5082	PET	Acrylic	Clear	100	90	General purpose
Egebant D5028	PET	Acrylic	Clear	125	90	General purpose
Egebant D2040	PET	Acrylic	Clear	95	90	General purpose
Egebant TNT710/160	Non Woven	Synthetic Rubber	Translucent	160	60	Laminated foam operations, cardboard and general purpose
Egebant VX160	Non Woven	Synthetic Rubber	Translucent	160	60	Laminated foam operations, cardboard and general purpose
Egebant H-09	Non Woven	Synthetic Rubber	Translucent	80	60	Laminated foam operations, cardboard and general purpose
Egebant 90HX	Non	Acrylic	White	110	90	Cross Linked Transfer Tape

Film Backing Tapes

Product Features

Ease of use

PVC, PET, cloth, fabric and OPP carriers

Kinds of acrylic and rubber adhesive

High and low surface energy good adhesion to the product

High initial adhesion force



Product Code	Carrier	Adhesive Type	Color	Thickness (mic.)	Temperature Resistance (°C)	Application Areas
Egebant RDA700	OPP	Synthetic Rubber	Clear	98	60	General purpose
Egebant PT150	PET	Modified Acrylic	Translucent	150	120	Bonding of metal panels and mirrors.
Egebant PT205	PET	Modified Acrylic	Translucent	205	120	Bonding of metal panels and mirrors.

Foam Tapes

Product Features

Flexibility and space-filling

Bonding rough or irregular surfaces

Vibration and noise isolation

Impact resistance

Heat resistance



Product Code	Carrier	Adhesive Type	Color	Thickness (mm)	Temperature Resistance (°C)	Application Areas
Egebant FT 67	PE Foam	Acrylic	White	1,0	90	General purpose bonding solutions used in outdoor environments.
Egebant FT 67	PE Foam	Acrylic	Black	1,0	90	General purpose bonding solutions used in outdoor environments.
Egebant 1100R+	Modified Acryled Foam	Acrylic	White	1,1	120	General purpose bonding solutions used in outdoor environments.
Egebant 71100	Modified Acryled Foam	Acrylic	Black/White	1,1	120	General purpose bonding solutions used in outdoor environments.
Egebant 640R+	Modified Acryled Foam	Acrylic	White	0,64	120	General purpose bonding solutions used in outdoor environments.
Egebant 70080	Modified Acryled Foam	Acrylic	Black/Gray	0,8	120	General purpose bonding solutions used in outdoor environments.
Egebant 500R	NON	Acrylic	Transparent	0,5	120	General purpose bonding solutions used in outdoor environments.
Egebant 1000R	NON	Acrylic	Transparent	1,0	120	General purpose bonding solutions used in outdoor environments.

Pe Freezer Tapes







Product Code	Carrier	Adhesive Type	Color	Thickness	Tensile Strength	Adhesive N/25mm	Application Areas
Egebant TT6405	LDPE	Syn. Rubber	White	73 mic.	28	13	Used in Evap coil winding in white goods industry. Polyurethane has a high binding capacity. Strong resistance against cold.
Egebant TT6400	LDPE	Syn. Rubber	White	85 mic.	30	20	Used in Evap coil winding in white goods industry. Polyurethane has a high binding capacity. Strong resistance against cold.

Isolation Plate

Product Features

Adhesive laminated Polycarbonate or PVC plates, to isolate electronic components, in electronic devices.



Refrigerator Back Carton Plates

Product Features

Aluminium and PE laminated carton for refrigerator back panels. Can be converted in different dimensions and shapes.






Isolation Foam

Product Features

Adhesive laminated Polyurethane or Silicone strips for TV production.

Different friction and shore levels



Can be converted into different lengths and widths

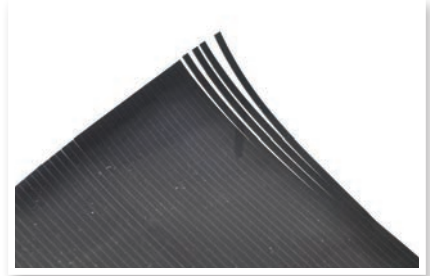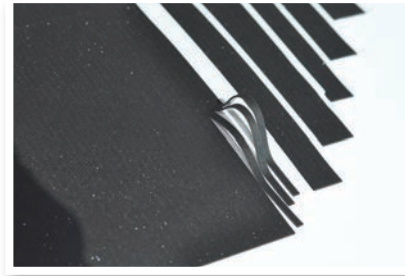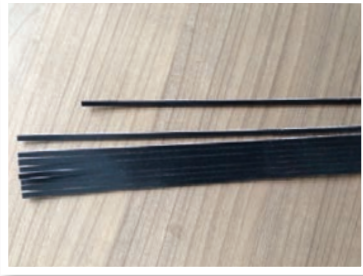

Die-Cut Kiss-Cut Product

Product Features

Adhesive laminated foams. Die cut, kiss cut, double sided tape, Aluminium Tapes.

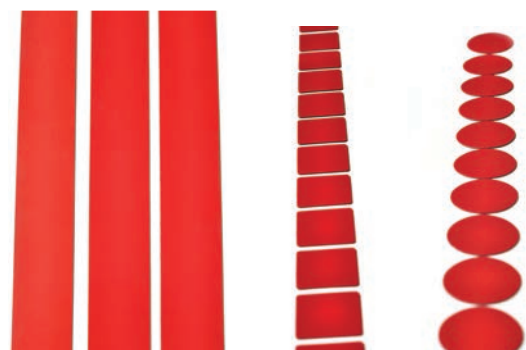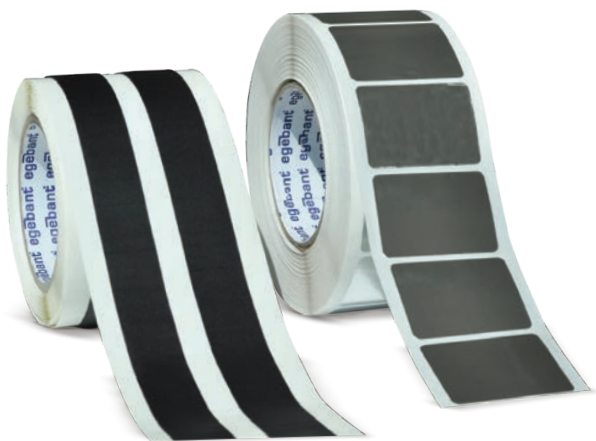





ABRASIVES

www.egebant.com.tr

Abrasives



Abrasive Belts / Wide Belts

Product Features

Suitable for all sanding and grinding operations: with unsupported belt, sander pad and contact wheel


Special designs for customised applications, e.g. for furniture production to enable fast and clean preparation of large surfaces ready for painting

Wide range of sizes

Paper and cloth backed

All products with high tensile strength and optimum stretching resistance

Joint types



Overlap joint

Double skived joint

Zigzag film joint

Film joint

Film on top joint

Segmented Belts


Product Features

Its strong polyester backing and sharp silicon carbide mineral provide superior performance in materials such as chipboard, MDF, HDF, and OSB.

Its special backing structure provides long life and high-performance.

Applications

- ☐ Steel
- ☐ Wood
- ☐ Stainless Steel
- ☐ Paint / Varnish / Filler
- ☐ NF Metal
- ☐ Plastic
- ☐ Glass

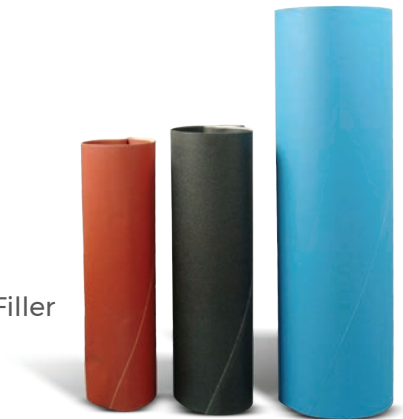


Grain	Backing	Coating
Aluminium Oxide	D, F, G paper	Open
Zirconia Alumina	J, JF, X, XF Cloth	Semi-Open
Ceramic Aluminium Oxide	Y, Z Polyester	Close
Silicon Carbide (SiC)	Film	

- ☐ Custom sizes available



Applications

- ☐ Calibrating, intermediate sanding and finishing

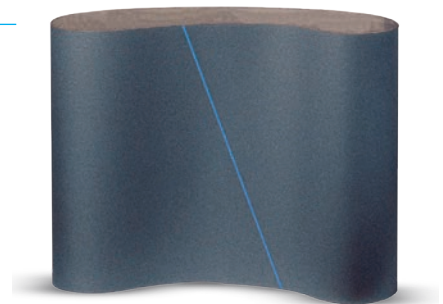

Materials

- ☐ Chipboard
- ☐ OSB board MDF and HDF board

Grain	Backing	Coating	Grits
Silicon Carbide (SiC)	Y Polyester Paper	Semi-Open	24-180

Velcro / Psa Discs

Product Features


Suitable for orbital and rotary machines. These sandpapers, which have a wide range of sizes and holes, are suitable for wet and dry use, and also have cloth and film backing options.




Applications

- ☐ Steel
- ☐ Stainless Steel
- ☐ Wood
- ☐ Paint / Varnish / Filler
- ☐ Plastic
- ☐ Metals
- ☐ Glass
- ☐ Stone


Grain	Backing	Coating
Aluminium Oxide	B, C, D, E, F paper	Semi-Open
Zirconia Alumina	X, JF Cloth	Close
Ceramic Aluminium Oxide	Film	
Silicon Carbide (SiC)		




D1
9 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm




D2
8 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm




D3
6 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm




D4
8 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm



D5
8 Holes
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm



D6
8 Holes (Outside)
6 Holes (Inside)
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm



D7
8 Holes (Outside)
8 Holes (Inside)
76 mm, 115 mm,
125 mm, 150mm,
180 mm, 200 mm,
250mm
1 hole in the center


Foam and Sponge Sanding Pads/Discs

Product Features

Flexible abrasives for countered surfaces

Due to its sponge backing, suitable for all profile surfaces

Dimension	Type	Grit Range
96x66x25 mm	Pad	36-400
96x123x12,5mm	Pad	36-400
115x140x5mm	Pad	Medium, Fine, Super Fine, Ultra Fine, Micro Fine
Diameter: 150 Velcro	Flat - Perforated	Medium, Fine, Super Fine

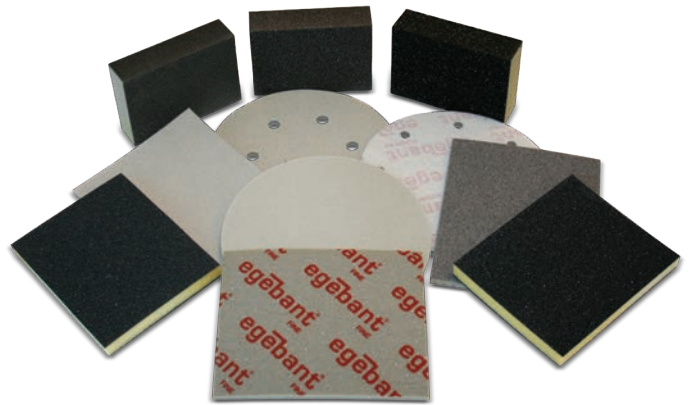

Foam-Backed Abrasive Rolls

Product Features

High quality flexible aluminium oxide abrasive rolls.

Due to its foam backing, suitable for all surfaces.

Very good performance on most woods, paint, varnish and lacquer.

Dimension	Grit Range	Unit
115 mm x 25 m	40-1500	1



Flap Wheels

Flap Wheels

Product Features

Our flap wheels are used for stock removal, finishing, etc. on flat or different forms of surfaces. It is suitable for surface sanding operations. Thanks to its flexible leaf structure, it provides high performance on all kinds of surfaces.



Applications

- Paint / Varnish / Filler
- Wood
- Plastic
- Metals

Grain	Backing
Aluminium Oxide	X Cloth - JF Cloth

Crit	24-36-40	50-60	80-120	150-220	240-320	400	Unit/Box
			100 x 50				2
			100 x 100				1
			150 x 30				1
			150 x 50				1
			165 x 30				3
			165 x 50				2
			200 x 50				1
			250 x 50				1
			300 x 30				1
			300 x 50				1
			350 x 50				1
			350 x 100				1
			380 x 75				1
			410 x 30				1
			410 x 50				1
			410 x 100				1

Spindle Mounted Flap Wheels

Product Features

Suitable for use on metal and wood surfaces.



Applications

- Wood
- Plastic
- Metals

Grain	Backing
Aluminium Oxide- Silicon Carbide	X Cloth - JF Cloth

Crit	40-80	100-180	220-320	Unit/Box
			30 x 10 x 6	100
			30 x 15 x 6	100
			40 x 15 x 6	50
			40 x 20 x 6	50
			40 x 25 x 6	50
			40 x 30 x 6	50
			50 x 10 x 6	20
			50 x 15 x 6	20
			50 x 20 x 6	20
			50 x 25 x 6	20
			50 x 30 x 6	20
			50 x 40 x 6	20
			60 x 10 x 6	20
			60 x 15 x 6	20
			60 x 20 x 6	20
			60 x 25 x 6	20
			60 x 30 x 6	20
			60 x 40 x 6	10
			60 x 50 x 6	10
			80 x 15 x 6	10
			80 x 20 x 6	10
			80 x 25 x 6	10
			80 x 30 x 6	10
			80 x 40 x 6	9
			80 x 50 x 6	9

Threaded Flap Wheel

Product Features

Our threaded flap wheels are used for stock removal, finishing etc. on flat or different forms of surfaces. It is suitable for surface sanding operations. Thanks to its flexible leaf structure, it provides high performance on all kinds of surfaces.

Can be used on all standard angle grinders (80 m/s).

It can be easily removed and installed without the help of any tools.

Applications

- Paint
- Plastic
- Wood
- Metal



Grain	Grit	Grit P40 - P120	Unit/Box
Aluminium Oxide	115 x 20 mm		5

Slashed Flap Wheel

Product Features

It adapts to profiled surfaces thanks to its fringed leaves.

Applications

- Paint
- Wood
- Metals
- Plastic



Grain	Backing
Aluminium Oxide	X Cloth - JF Cloth

CSD Flap Wheels

Product Features

For removing paint, varnish and rust from seams, door jambs, drip moldings, pinchwelds and other difficult-to-reach areas.

Applications

- Metal
- Paint
- Plastic



Grain	Color	Coating
Silicon Carbide (SiC)	Black	100 X 13
	Blue	150 X 13
	Purple	100 X 10 X 6
		100 X 20 X 6
		100 X 100 X 20

V-TYPE Flap Wheel

Product Features

It is suitable for sanding surfaces in corner welds and hard-to-reach spots. It is perfect for a wide range of jobs, from finishing to high stock removal, because of its wide selection of grit.

Applications

- Welding
- Metals

Grain	Backing
Zirconia - Aluminium Oxide	X-Cloth



Grit P40 - P400	Unit / Box
160 x 14mm	10
160 x 20mm	10

Nonwoven Flap Wheels

Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface.

Applications

- ▣ Fiberglass
- ▣ Metal
- ▣ Paint
- ▣ Plastic

Grain

Aluminum Oxide
Silicon Carbide (SiC)

A. Coarse	A. Medium	A. Fine	A. Very Fine
S. Medium	S. Fine	S. Very Fine	S.U. Fine



Combi Flap	Unit / Box
100 x 50	2
100 x 100	1
150 x 30	3
150 x 50	2
165 x 30	3
165 x 50	2
200 x 30	1
200 x 50	1
250 x 30	1
250 x 50	1
300 x 30	1
300 x 50	1
350 x 30	1
350 x 50	1
350 x 100	1
400 x 30	1
400 x 50	1
400 x 100	1

Spindle Mounted Nonwoven Flap Wheels

Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface. It is suitable for use with hand machines.

A. Coarse	A. Medium	A. Fine	A. Very Fine
S. Medium	S. Fine	S. Very Fine	S.U. Fine

Spindle Mounted Nonwoven Mop	Spindle Mounted Combi-Mop	Unit / Box
40 x 20 x 6		50
50 x 20 x 6		20
50 x 30 x 6		20
60 x 15 x 6		20
60 x 30 x 6		20
80 x 40 x 6		9
80 x 50 x 6		9




Jewelry mop	Nonwoven	Combi	Abrasive
	100 x 10		
	100 x 15		
	100 x 20		
	100 x 30		

Nonwoven Rolls

Product Features

Suitable for hand use in surface development applications.

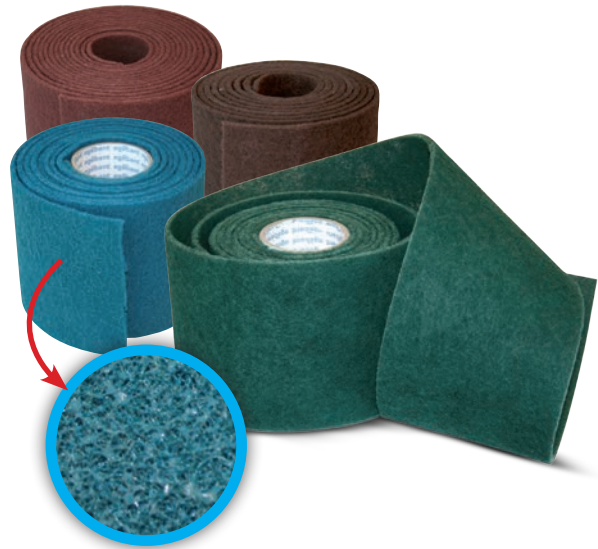

Nonwoven Rolls	A.	Sic	Color
A.COARSE	S.	Sic	Black/Gray
A.MED	Z.	ZR	Blue
A.FINE			
A.V.FINE	Coarse		P100 - P120
S.MED	Medium	Medium	P180 - P220
S.FINE	Fine	Thin	P280 - P320
S.V.FINE	Very Fine	Very Thin	P320 - P360
S.U.FINE	Ultra Fine	Ultra Thin	P500 - P600

Nonwoven Discs And Sheets



Nonwoven	Sheet	Sheet	Disc Diameter	Unit / Box
A.COARSE	230 x 280	158 x 224	150	10
A.MED				
A.FINE				
A.V.FINE				
S.MED				
S.FINE				
S.V.FINE				
S.U.FINE				

Flap Discs




Professional products with long life and high abrasion capacity.

Zirconia alumina cloth

Aggressive zirconia alumina grit.

Ceramic aluminium oxide + Multibond

Ceramic high Performance grit.

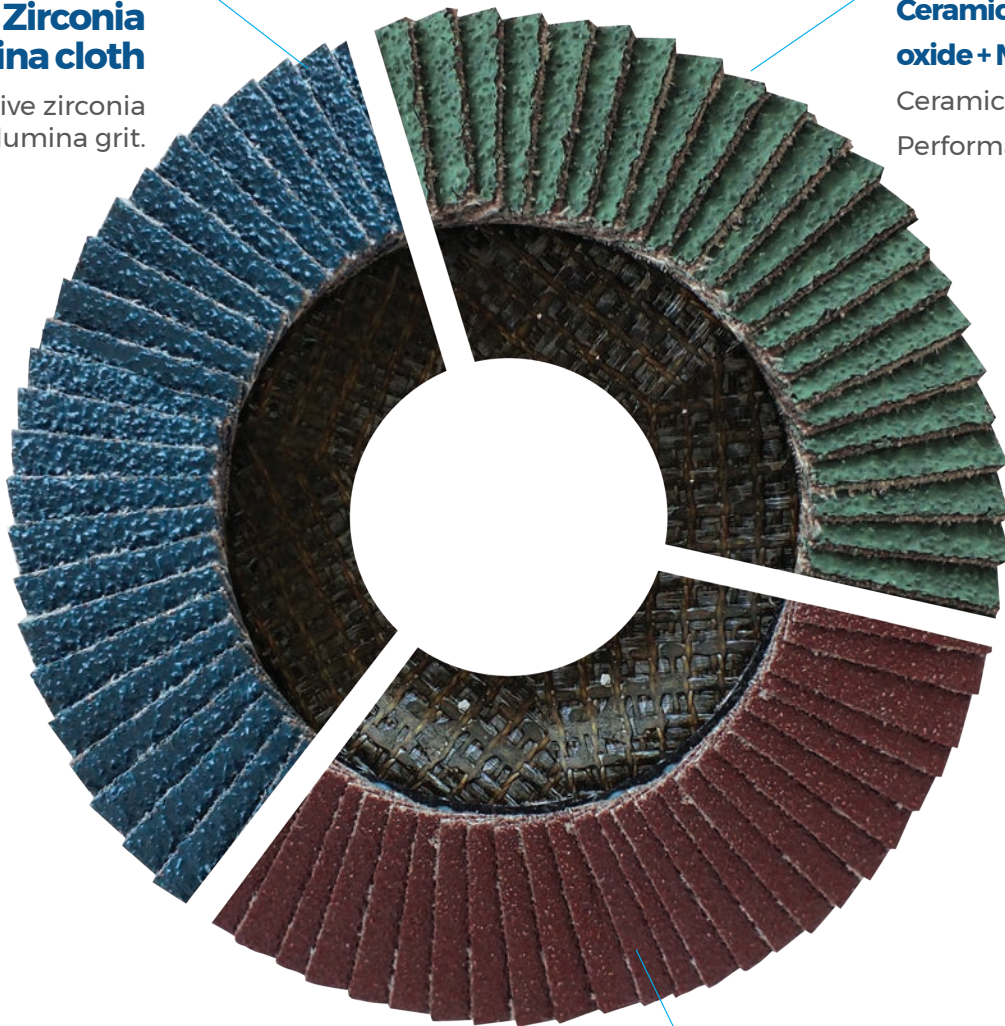

Aluminium oxide cloth

Durable grit aluminium oxide.

Egebant Alox

Product Features

Ideal for metal surfaces and weld abrasion applications.

Applications

- Metal
- Weld



Grain	Backing Plate	Sizes
Aluminium Oxide	Glass Fibre	115x22 125x22 180x22

Grit				
P36	P40	P60	P80	P120

Egebant ZR

Product Features

Ideal for metal surfaces and weld abrasion applications.

High stock removal performance thanks to its zirconia mineral.

Applications

- Stainless Steel



Grain	Backing Plate	Sizes
Zirconia	Glass-Fibre	115x22 125x22 180x22

Grit				
P36	P40	P60	P80	P120

Flap Discs

Egebant ZR Extra

Product Features

It has high abrasiveness and is durable and long-lasting. This product is especially ideal on steel and stainless steel surfaces.

Applications

- Weld
- Deburring
- Metal



Grain	Backing Plate	Sizes
Zirconia alumina	Glass Fibre	115x22 125x22 180x22

Crit
P36 P40 P60 P80 P120

Egebant SER

Product Features

It is long-lasting, durable, and has a high level of abrasiveness.

Applications

- Stainless Steel
- Weld
- Deburring
- Metal



Grain	Backing Plate	Sizes
Ceramic Aluminium Oxide	Glass Fibre	115x22 125x22 180x22

Crit
P36 P40 P60 P80 P120

Sander Alox

Product Features

Ideal for metal surfaces and weld abrasion applications.

Applications

- Metal
- Weld



Grain	Backing Plate	Sizes
Aluminium Oxide	Glass Fibre	115x22 125x22 180x22

Crit
P36 P40 P60 P80 P120

Sander ZR

Product Features

Ideal for metal surfaces and weld abrasion applications.

High stock removal performance thanks to its zirconia mineral

Applications

- Stainless Steel



Grain	Backing Plate	Sizes
Zirconia al. / Al. oxide	Plastic Glass Fibre reinforced	115x22 125x22 180x22

Crit
P36 P40 P60 P80 P120

Radial Discs

Radial CSD Disc

Product Features

For scraping paint and varnish, removing rust and satin used.

It is suitable for use with angle grinder machine.



Applications

- ▣ Fiberglass
- ▣ Metal
- ▣ Paint
- ▣ Plastic

Grain	Color	Sizes
Silicon Carbide (SiC)	Black	100x22
	Blue	115x22
		125x22
		150x22
	180x22	

Radial Nonwoven Disc

Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface. It is suitable for use with angle grinder machine

Applications

- ▣ Metals



Grain	Sizes	Grit
Aluminium Oxide, Silicon Carbide (SiC)	115x20	A. Fine, A. Very Fine, S. Fine, S. Very Fine, S. Ultra Fine

Radial Abrasive Disc

Product Features

It is used for light stock removal without leaving deep lines.

Applications

- ▣ Metals
- ▣ Stainles Steel
- ▣ Steel



Grain	Grit	Sizes
Aluminium Oxide	60-400	115x22-125x22

Quick Change Abrasives

Product Features

Easy to change used with rotary sander machines for grinding finishing and deburring on metal wood and plastics.



Diameter	Mineral	Grain	Grit	Unit / Box
30 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Nonwoven	24-400	100
50 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Fiber, Nonwoven	24-400	
75 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Fiber, Nonwoven	24-400	
100 mm	Alox, Zirconia, Silicon Carbide, A Coarse, A. Medium, A. Very Fine	Fiber, Nonwoven	24-400	

Drum Abrasives

Product Features

It is suitable for use in processes such as surface development and deburring. It has a wide application area thanks to different grit sizes and sandpaper options.



egebant®

Headquarter

A: TOSB 3. Cadde No: 23 Pk. 41420

Sekerpinar, Cayirova/Kocaeli

T: +90 262 679 1313

F: +90 262 679 1300

E: info@egebant.com.tr

www.egebant.com.tr



/egebant



/egebantcom



/Egebant



/Egebant



/EgebantComTr