PRODUCT CATALOG



catalog®

egebant®

www.egebant.com.tr

Rich Heritage,
Strong Future

Since **1969**

+**57** Years of Experience

+**50** Sales Specialists

+**75** Dealer Network

2 Manufacturing Plants

1 R&D Center

Total Employees +**650**

egebant
Kocaeli
Headquarter and
Factory

egebant
Şanlıurfa
Factory



egebant
Global Export
Network



3+ Continents **30** Countries

Şanlıurfa Factory



Kocaeli Factory & Head Office



ABOUT US

Egebant was established in Karaköy in 1969. With its sustainable solutions, Egebant prioritises customer satisfaction at the highest level and aims to be the permanent solution partner of its customers and stakeholders. In line with this mission, it has been collaborating with globally recognised brands for many years.

Accordingly, Egebant brings the products of globally strong brands such as 3M, Klingspor, Dynabrade, and Sicad to the Turkish market.

Guided by its core values of trustworthiness, innovation, sincerity, courage, and participation, Egebant builds long-term, trust-based relationships with its customers and stakeholders while developing flexible, tailored solutions for them.

By leveraging its manufacturing experience, which it has gained through providing services to many industry-leading brands—from the automotive sector to home appliances—Egebant continues to expand its product range with its brands, Egebant and Sander, while making investments in line with market needs.

With over 650 employees, more than 50 active sales specialists, and a widespread dealer network across Turkey, Egebant operates manufacturing facilities in Şekerpınar, Kocaeli, and Şanlıurfa. The company exports to more than 30 countries across three continents, primarily in Europe, offering a diverse range of products for various industries.

Through its customer-centric approach, Egebant conducts research and development (R&D) activities to create innovative solutions that generate value for all its customers and stakeholders.

As part of its environmental policy, Egebant effectively manages the inputs of its production processes and energy resources, developing methods to increase energy efficiency, reduce waste, and prevent pollution.

With a commitment to environmental sustainability, the company has launched a Zero Waste Project in its facilities, ensuring waste separation at the source to minimise environmental risks. Additionally, Egebant is expanding its expertise in green energy through its recycling facilities.

Moreover, to contribute to the reduction of emissions and the development of a renewable energy system, Egebant plans to generate a significant portion of the energy it consumes at its Şanlıurfa production facility through a rooftop solar power plant.

For 56 years, Egebant has been successfully growing its brands and reputation with the vision of becoming a global leader, continuously producing sustainable solutions and creating lasting value for all its stakeholders.

Finding the Right Gloves is

Now Effortless!

Easily find the gloves you are looking for by using the Glove Selector on **egebant.com.tr**, powered by an algorithm that simplifies glove selection for various industries and needs.

The best protection is in your hands with the fastest selection!



1. Scan the QR code
2. Select the Filters You Want!
3. View the Gloves That Match Your Needs



SCAN THE QR CODE

TABLE OF CONTENTS

Protective Work Gloves

About Us 3
Glove Catalog Index 8-11
Micro Foam Coated Cut-Resistant Gloves 12
PU-Coated Cut-Resistant Gloves 13-18
Nitrile Foam-Coated Cut-Resistant Gloves 19-23
Uncoated Gloves 24
Micro Foam Coated Assembly Gloves 25
Nitrile Foam-Coated Assembly Gloves 26-29
EcoCycle Gloves 30
Oil-Resistant Work Gloves 31
PU-Coated Precision Assembly Gloves 32-36
General Work Gloves 37
Glove Standards 38-42
Glove Coating Types 43-44

Adhesive Tapes

Adhesive Tapes 48
Masking Tapes 49
Duct Tapes 50
Strapping Tapes 51
Filament Tapes 52
Aluminium Tapes 53
Double Sided Tapes 54
Film Backing Tapes 55
Foam Tapes 56
Pe Freezer Tapes 57
Refrigerator Back Carton Plates 58

Abrasives

Abrasive Belts / Wide Belts 61
Segmented Belts 62
Velcro / Psa Discs 63
Foam and Sponge Sanding Pads/Discs 64
Flap Wheels 65-68
Nonwoven Abrasives 69-71
Flap Discs 73-75
Radial Discs 76-78
Notes 79-80


egeBant
SanCut D
331 334 9
4X42D X1XXXX

PROTECTIVE
WORK GLOVES

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
SanCut+ Series	NEW 681 632	EN388: 4X42B	½ Coated	Dyneema Diamond & Nylon	Micro Foam	6,7,8,9,10,11	Blue & White Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	12
	NEW 681 633	EN388: 4X42C	½ Coated	Dyneema Diamond & Nylon	Micro Foam	6,7,8,9,10,11	Navy Blue & White Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	12
PU-Coated Cut-Resistant Gloves	101 744	EN388: 4X42D EN407: X1XXXX	½ Coated	HPPE & Steel Fiber & Polyester & Cotton	Polyurethane	6,7,8,9,10,11	Lining White - Black & Yellow Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	13
	131 242	EN388: 4X42B EN407: X1XXXX	½ Coated	HDPE & Glass & Fiber & Polyester	Polyurethane	7,8,9,10,11	Lining Grey, Coating White	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	13
	131 742	EN388: 4X42B EN407: X1XXXX	½ Coated	HDPE & Glass & Fiber & Polyester	Polyurethane	7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	14
	131 744	EN388: 4X42D EN407: X1XXXX	½ Coated	HDPE & Steel Fiber & Polyester	Polyurethane	7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	14
	131 744T	EN388: 4X42D EN407: X1XXXX	½ Coated	HDPE & Steel Fiber & Polyester	Polyurethane	7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	14
	141 243	EN388: 4X31A	½ Coated	HDPE & Glass & Fiber & Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	15
	141 743	EN388: 4X43C	½ Coated	HDPE & Glass & Fiber & Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	15
	141 743T	EN388: 4X43C	½ Coated	HDPE & Glass & Fiber & Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	15
	141 745	EN388: 4X43E	½ Coated	HPPE & Glass Fiber & Steel Fiber & Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	16
	181 242	EN388: 4X42B	½ Coated	Dyneema Diamond & Nylon	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	16
	181 743	EN388: 4X43C	½ Coated	Dyneema Diamond & Nylon	Polyurethane	6,7,8,9,10,11	Liner Blue & White Melange Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	16
	191 732	EN388: 4X43B	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	17
	191 733	EN388: 4X43C	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	17
	191 734	EN388: 4X43D	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	18
	191 734T	EN388: 4X43D	½ Coated	HPPE & Steel Fiber & Polyester	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	18
	191 746	EN388: 3X42F	½ Coated	HPPE & Glas Fiber & Steel Fiber & Nylon	Polyurethane	6,7,8,9,10,11	Lining Black & White Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	18

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
Nitrile Foam-Coated Cut-Resistant Gloves	301 735	EN388: 4X21E EN407: X1XXXX	½ Coated	HPPE & Steel Fiber & Polyester & Cotton	Foam Nitrile	6,7,8,9,10,11	Lining White - Black & Yellow Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**19**
	301 735T	EN388: 4X21E EN407: X1XXXX	½ Coated	HPPE & Steel Fiber & Polyester & Cotton	Foam Nitrile	6,7,8,9,10,11	Lining White - Black & Yellow Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**19**
	331 334	EN388: 4X42D EN407: X1XXXX	½ Coated	HDPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining White & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**20**
	331 732	EN388: 4X42B EN407: X1XXXX	½ Coated	HDPE & Glass & Fiber & Polyester	Foam Nitrile	7,8,9,10,11	Lining White & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**20**
	331 734	EN388: 4X42D EN407: X1XXXX	½ Coated	HDPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Navy Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**20**
	331 734T	EN388: 4X42D EN407: X1XXXX	½ Coated	Steel Fiber & HPPE & Polyester	Foam Nitrile	6,7,8,9,10,11	White & Black Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**21**
	341 734	EN388: 4X42D	½ Coated	HPPE & Glass Fiber & Nylon	Foam Nitrile	6,7,8,9,10,11	Lining Navy Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**21**
	391 732	EN388: 4X43B	½ Coated	Dyneema Diamond & Nylon	Foam Nitrile	6,7,8,9,10,11	Lining Blue & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**22**
	391 733	EN388: 4X43C	½ Coated	HPPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**22**
	391 734	EN388: 4X44D	½ Coated	HPPE & Steel Fiber & Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**23**
Uncoated Gloves	030 704	EN388: 1X42D EN407: X1XXXX	Uncoated	HDPE & Steel Fiber	Uncoated	7,8,9,10,11	Lining Black & White	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**24**
	040 703	EN388: 1X41C EN407: X1XXXX	Uncoated	HDPE & Glass & Fiber & Polyester & Spandex	Uncoated	7,8,9,10,11	Lining Black & White Melange	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	**24**

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
SanFoam+ Series	NEW 621 731	EN388: 4X31A EN407: X1XXXX	½ Coated	Carbon - Nylon & Spandex	Micro Foam	6,7,8,9,10,11	Lining Blue & Back Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	25
	NEW 671 731	EN388: 4X31A EN407: X1XXXX	½ Coated	Carbon - Nylon & Spandex	Micro Foam	6,7,8,9,10,11	Lining Grey & Back Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	25
Nitrile Foam-Coated Assembly Gloves	371 731	EN388: 3X31A EN407: X1XXXX	½ Coated	Nylon & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Grey & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	26
	521 530	EN388: 3X31A EN407: X1XXXX	½ Coated	Nylon	Foam Nitrile	6,7,8,9,10,11	Lining Red, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	27
	521 731	EN388: 4X31A EN407: X1XXXX	½ Coated	Nylon	Foam Nitrile	6,7,8,9,10,11	Lining Black & White Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	27
	571 241	EN388: 4X31A EN407: X1XXXX	½ Coated	Nylon & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	28
	571 331	EN388: 4131A EN407: X1XXXX	½ Coated	Nylon & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	28
	571 431	EN388: 4X31A EN407: X1XXXX	½ Coated	Nylon & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Grey, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	28
	571 731	EN388: 4X21X EN16350: ESD	½ Coated	Nylon & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Grey & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	29
	821 740	EN388: 4X44D	½ Coated	Carbon - Nylon & Spandex	Foam Nitrile	6,7,8,9,10,11	Lining Blue & Black Melange, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	29
EcoCycle Gloves	317 330	EN388: 4X21X	½ Coated	Recycled Polyester	Foam Nitrile	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	30
	377 731	EN388: 4X31A	½ Coated	Recycled Nylon	Foam Nitrile	6,7,8,9,10,11	Lining Green & Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	30
Oil-Resistant Work Gloves	SanSeal 442 460	EN388: 4121X	Fully Coated	Polyester	Nitrile	7,8,9,10,11	Liner Grey & Coating Blue & Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	31
	SanSeal 443 460	EN388: 4121X	¾ Coated	HPPE	Nitrile	7,8,9,10,11	Liner Grey & Coating Blue & Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	31
	SanSeal 443 464	EN388: 4X42D	Fully Coated	Polyester	Nitrile	7,8,9,10,11	Liner Grey & Coating Blue & Black	Pairs per Pack 10 Packs per Carton 6 Total Contents per Carton 60	31

Glove Catalog Index

	Product Code	Standard	Coating Type	Liner Material	Coating Material	Size	Colour	Packaging Info	Page No
PU-Coated Precision Assembly Gloves	111 220	EN388: 3X21X	½ Coated	Polyester	Polyurethane	6,7,8,9,10,11	Lining Grey & Black Melange, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	32
	111 330	EN388: 3X21X	½ Coated	Polyester	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	32
	121 220	EN388: 4X31X	½ Coated	Nylon	Polyurethane	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	33
	121 330	EN388: 4X31X	½ Coated	Nylon	Polyurethane	6,7,8,9,10,11	Lining Grey, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	33
	121 440	EN388: 4X31X	½ Coated	Nylon	Polyurethane	6,7,8,9,10,11	Lining Red, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	33
	116 330	EN388: 3X31X	½ Coated	Polyester & Nylon & Spandex	Polyurethane	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	34
	161 330	EN388: 3X21X	½ Coated	Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining White, Coating Grey	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	35
	166 330	EN388: 1000X	½ Coated	Polyester & Spandex	Polyurethane	6,7,8,9,10,11	Lining Black, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	35
	721 740	EN388: 4X21X EN16350 ESD	½ Coated	Carbon - Nylon & Spandex	Polyurethane	6,7,8,9,10,11	Lining Grey, Coating Black	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	36
Uncoated Gloves	020 200	_	Uncoated	Nylon	Uncoated	6,7,8,9,10	Lining White	Pairs per Pack 10 Packs per Carton 10 Total Contents per Carton 100	36
General Work Gloves	NP01 Yellow	EN388: 3X11A	¾ Coated	Cotton	Nitrile	8,9,10	Lining Ecru, Coating Yellow	1st Option (Size 9 and 10): Pairs per Pack 12, Packs per Carton 24, Total Contents per Carton 288 2nd Option (Size 8, 9, and 10): Individual Packaging, Total Contents per Carton 200	37
	NP01Blue	EN388: 3X11A	¾ Coated	Cotton	Nitrile	8,9,10	Lining Ecru, Coating Blue	1st Option (Size 9 and 10): Pairs per Pack 12, Packs per Carton 24, Total Contents per Carton 288 2nd Option (Size 8, 9, and 10): Individual Packaging, Total Contents per Carton 200	37
	NP02 Yellow	EN388: 3X11A	Fully Coated	Cotton	Nitrile	8,9,10	Lining Ecru, Coating Yellow	Individual Packaging, Total Contents per Carton 200 (Sizes 9 and 10)	37
	NP02 Blue	EN388: 3X11A	Fully Coated	Cotton	Nitrile	8,9,10	Lining Grey, Coating Black	Individual Packaging, Total Contents per Carton 200 (Sizes 9 and 10)	37
	NP03 Blue	EN388: 4111A	Fully Coated	Cotton	Nitrile	9,10,11	Lining Ecru, Coating Blue	Individual Packaging, Total Contents per Carton 200 (Sizes 9 and 10)	37

SanCut+ Series

Micro Foam Coated Cut-Resistant Gloves

General Properties

Manufactured with a Dyneema liner, this cut-resistant work glove offers enhanced comfort, excellent dexterity, and superior grip thanks to its ultra-lightweight structure. It provides extended abrasion protection due to its reinforced thumb crotch support structure.

Areas of Usage

Working with sharp-edged metal/plastic parts, assembly and production lines, packaging, general handling, glass manufacturing

SanCut+ 681 632

NEW



EN 21420

EN 388

4X42B

Thin | Ultra Light | Good Fit for Hand | Metal Free | High Flexibility | Glass Fiber Free | High Degree of Gripping | High Level of Comfort

Coating	Micro Foam
Coating Colour	Black
Liner	Dyneema Diamond & Nylon
Liner Colour	Blue & White Melange
Gauge	18G
Thickness	0,9 mm
Size	6,7,8,9,10,11

Check it Now



Automative | Transportation | White Goods | Aviationspace - Aviation | Metal Processing | Electronics | Light Manufacturing Industry | Packaging

SanCut+ 681 633

NEW



EN 21420

EN 388

4X42C

Thin | Ultra Light | Good Fit for Hand | Metal Free | High Flexibility | Glass Fiber Free | High Degree of Gripping | High Level of Comfort

Coating	Micro Foam
Coating Colour	Black
Liner	Dyneema Diamond v& Nylon
Liner Colour	Navy Blue & White Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now



Automative | Transportation | White Goods | Aviation | Metal Processing | Electronics | Light Manufacturing Industry | Packaging

PU-Coated Cut-Resistant Gloves

General Properties

It is produced by coating PU on a thin and heat-resistant HPPE fiber and polyester blend lining. TDM 100 provides D level cut resistance according to ISO 13997 test. It provides a better Greyp on dry and slightly oily parts compared to bare hands. It is suitable for working with hot parts (100 degree contact temperature) as well as for applications where protection against the risk of cuts is required.

Areas of Usage

Metalworking, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications.

SanCut 101 744



D CUT

CE

EN 21420

EN 407

X1XXXX

EN 388

4X42D

High Resistance

Coating	Polyurethane
Coating Colour	Grey
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Colour	White-Black & Yellow Melange
Gauge	13G
Thickness	1,15 mm
Size	6,7,8,9,10,11

Check it Now



Automative · Transportation · White Goods · Aviationspace - Aviation · Electronics · Ceramic and Glass · Metal Processing · Wind Energy · Construction

General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.

Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.

SanCut 131 242



B CUT

CE

EN 21420

EN 407

X1XXXX

EN 388

4X42B

High Resistance

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester
Liner Colour	White
Gauge	15G
Thickness	1,00 mm
Size	7,8,9,10,11

Check it Now

Light Manufacturing Industry · Automative · Transportation · White Goods · Aviationspace - Aviation · Metal Processing · Furniture · Ceramic and Glass

SanCut Series

PU-Coated Cut-Resistant Gloves

General Properties

A cut-resistant work glove designed to withstand abrasive materials thanks to its extra-durable PU coating. Its discontinuous fiber structure allows for a secure grip on hard objects without creating Press Operationssure on the hand.

Areas of Usage

General handling, working with metal parts, material transport, rough assembly, heavy material handling.

SanCut 131 742



B CUT

CE EN 21420

EN 407 X1XXXX

EN 388 4X42B

High Resistance

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	15G
Thickness	1,00 mm
Size	7,8,9,10,11

Check it Now

Light Manufacturing Industry · Automative · Transportation · White Goods · Aviationspace - Aviation · Metal Processing · Ceramic and Glass

SanCut 131 744



D CUT

CE EN 21420

EN 407 X1XXXX

EN 388 4X42D

High Resistance · Silicone-Free

Coating	Polyurethane
Coating Colour	Grey
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	7,8,9,10,11

Check it Now

Light Manufacturing Industry · Automative · Transportation · White Goods · Aviationspace - Aviation · Metal Processing · Ceramic and Glass

SanCut 131 744T



D CUT

CE EN 21420

EN 407 X1XXXX

EN 388 4X42D

High Resistance · Silicone-Free

Coating	Polyurethane
Coating Colour	Grey
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	7,8,9,10,11

Check it Now



Light Manufacturing Industry · Automative · Transportation · White Goods · Aviationspace - Aviation · Metal Processing · Ceramic and Glass

PU-Coated Cut-Resistant Gloves

General Properties

Precision working gloves; reinforced, resistant to cuts, made of twisted filament fiber, and suitable for general usage.

Areas of Usage

General handling, working with metal pieces, assembly and production lines, working with metal plates, working with sheet metal materials.

SanCut 141 243



C CUT

CE EN 21420

EN 388 4X43C

High Resistance | Good fit for Hands | Metal Free

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Colour	White
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | White Goods | Aviationspace - Aviation | Metal Processing

SanCut 141 743



C CUT

CE EN 21420

EN 388 4X43C

High Resistance | Good fit for Hands | Metal Free

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | White Goods | Aviationspace - Aviation | Metal Processing

SanCut 141 743T



C CUT

CE EN 21420

EN 388 4X43C

High Resistance | Good fit for Hands | Metal Free

Coating	Polyurethane
Coating Colour	Grey
Liner	Glass Fiber & HPPE & Polyester & Spandex
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now



Light Manufacturing Industry | Automative | Transportation | White Goods | Aviationspace - Aviation | Metal Processing

SanCut Series

PU-Coated Cut-Resistant Gloves

SanCut 141 745



E CUT

EN 21420

EN 388 4X43E

High Resistance | Good fit for Hands

Coating	Polyurethane
Coating Colour	Grey
Liner	HPPE & Glass Fiber & Steel Fiber & Polyester & Spandex
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now



Automative | Transportation | White Goods | Aviationspace - Aviation | Electronics | Ceramic and Glass | Metal Processing | Wind Energy

General Properties

A cut-resistant precision work glove manufactured with a Dyneema liner, offering enhanced comfort, durability, and maximum mobility thanks to its lightweight structure.

Areas of Usage

General handling, working with metal pieces, precision assembly and production lines, working with metal or plastic plates, working with sheet metal materials.

SanCut 181 242



B CUT

EN 21420

EN 388 4X42B

Ultra Light | Thin | Steel Free | Glass Fiber Free | Moderate Resistance | High Flexibility | Good fit for Hands | Maximum Comfort

Coating	Polyurethane
Coating Colour	Grey
Liner	Dyneema Diamond & Nylon
Liner Colour	White
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | White Goods | Aviation | Metal Processing | Electronics | Packaging

SanCut 181 743



C CUT

EN 21420

EN 388 4X43C

Ultra Light | Thin | Steel Free | Glass Fiber Free | Moderate Resistance | High Flexibility | Good fit for Hands | Maximum Comfort

Coating	Polyurethane
Coating Colour	Grey
Liner	Dyneema Diamond & Nylon
Liner Colour	Blue & White Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | White Goods | Aviation | Metal Processing | Electronics | Packaging

PU-Coated Cut-Resistant Gloves

General Properties

High fingerType sensitivity cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

Areas of Usage

General handling, working with metal pieces, light assembly and production lines, working with metal or plastic plates, working with sheet metal materials.

SanCut 191 732



B CUT

CE EN 21420

EN 388 4X43B

Thin | Moderate Resistance | Good fit for Hands | Compatible with Touch Screens | High Flexibility | Glass Fiber Free | High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Blue & White Melange
Gauge	18G
Thickness	0,70 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | White Goods | Aviation | Metal Processing | Furniture | Electronics | Plastic | Communication

SanCut 191 733



C CUT

CE EN 21420

EN 388 4X43C

Thin | Moderate Resistance | Good fit for Hands | Compatible with Touch Screens | High Flexibility | Glass Fiber Free | High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,70 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | White Goods | Aviation | Metal Processing | Furniture | Electronics | Plastic | Communication

SanCut Series

PU-Coated Cut-Resistant Gloves

SanCut 191 734



D CUT

EN 21420

EN 388
4X43D

Thin | High Resistance | Good fit for Hands | Compatible with Touch Screens | High Flexibility | Glass Fiber Free | High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,75 mm
Size	6,7,8,9,10,11

Check it Now

Automative | Transportation | White Goods | Aviationspace - Aviation | Ceramic and Glass | Metal Processing | Wind Energy

SanCut 191 734T



D CUT

EN 21420

EN 388
4X43D

Thin | High Resistance | Good fit for Hands | Compatible with Touch Screens | High Flexibility | Glass Fiber Free | High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	15G
Thickness	0,80 mm
Size	6,7,8,9,10,11

Check it Now



Automative | Transportation | White Goods | Aviationspace - Aviation | Ceramic and Glass | Metal Processing | Wind Energy

SanCut 191 746



F CUT

EN 21420

EN 388
3X42F

Thin | Moderate Resistance | Good fit for Hands | Compatible with Touch Screens | High Flexibility | High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Grey
Liner	Steel Fiber & HPPE & Glass Fiber & Nylon
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now



Light Manufacturing Industry | Automative | Transportation | White Goods | Aviation | Metal Processing | Furniture | Electronics | Plastic | Communication

Nitrile Foam-Coated Cut-Resistant Gloves

General Properties

It is produced by coating Foam Nitrile on a cut, abrasion and heat-resistant, HPPE fiber and polyester blend lining. TDM 100 provides E level cut resistance according to ISO 13997 test. It makes it easier to hold dry and less oily parts compared to holding with bare hands. It is suitable for working with hot parts (100 °C contact temperature) as well as for applications where protection against the risk of cuts is required.

Areas of Usage

Metal working, working with heavy parts, working with sheet metal, production and assembly lines, steel wire applications.

SanCut 301 735



E CUT

High Resistance

EN 21420

EN 407 X1XXXX

EN 388 4X21E

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Colour	White-Black & Yellow Melange
Gauge	13G
Thickness	1,35 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry · Automative · Transportation · White Goods · Aviationspace - Aviation · Metal Processing · Wind Energy · Ceramic and Glass

SanCut 301 735T



E CUT

High Resistance

EN 21420

EN 407 X1XXXX

EN 388 4X21E

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester & Cotton
Liner Colour	White-Black & Yellow Melange
Gauge	13G
Thickness	1,35 mm
Size	6,7,8,9,10,11

Check it Now



Light Manufacturing Industry · Automative · Transportation · White Goods · Aviationspace - Aviation · Metal Processing · Wind Energy · Ceramic and Glass

SanCut Series

Nitrile Foam-Coated Cut-Resistant Gloves

General Properties

A cut-resistant work glove designed to withstand abrasive materials thanks to its extra-durable Foam Nitrile Coating, with a discontinuous fiber structure that allows for a secure grip on hard objects without creating Press Operationssure on the hand.

Areas of Usage

General handling, working with metal parts, material transport, rough assembly, heavy material handling, maintenance operations.

SanCut 331 334



D CUT

CE

EN 21420

EN 407 X1XXXX

EN 388 4X42D

High Resistance | High Degree of Gripping | Compatible with Touch Screens | Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Ceramic and Glass | Light Manufacturing Industry | Aviationspace - Aviation | Metal Processing | Construction

SanCut 331 732



B CUT

CE

EN 21420

EN 407 X1XXXX

EN 388 4X41B

High Resistance | High Degree of Gripping | Compatible with Touch Screens | Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Ceramic and Glass | Light Manufacturing Industry | Logistic | Aviationspace - Aviation | Metal Processing

SanCut 331 734



D CUT

CE

EN 21420

EN 407 X1XXXX

EN 388 4X42D

High Resistance | High Degree of Gripping | Compatible with Touch Screens | ESD | Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Construction | Aviationspace - Aviation | Ceramic and Glass | Metal Processing | Light Manufacturing Industry

Nitrile Foam-Coated Cut-Resistant Gloves

SanCut 331 734T



D CUT

CE

EN 21420

EN 388

4X42D

EN 407

X1XXXX

High Resistance | High Degree of Gripping | Compatible with Touch Screens | Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	White & Black Melange
Gauge	13 G
Thickness	1.00 mm
Size	6,7,8,9,10,11

Check it Now



Construction | Aviationspace - Aviation | Ceramic and Glass | Metal Processing | Light Manufacturing Industry

General Properties

It is made by double-layer knitting of reinforced cut-resistant continuous filament fiber and a specially designed cut-resistant fiber. This provides extra durability in cut protection. It offers high grip and excellent mobility.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 341 734



D CUT

CE

EN 21420

EN 388

4X42D

High Resistance | High Degree of Gripping | Good fit for Hands | High Flexibility | Metal Free | Compatible with Touch Screens | Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	HPPE & Glass Fiber & Nylon
Liner Colour	Navy Blue & White Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | White Goods | Aviationspace - Aviation | Metal Processing | Furniture | Ceramic and Glass | Plastic

SanCut Series

Nitrile Foam-Coated Cut-Resistant Gloves

General Properties

High grip cut resistant gloves with tightly knitted stainless steel reinforced yarn and micro foam PU coating.

Areas of Usage

General handling, working with metal pieces, working with sheet metal materials, assembly and production lines.

SanCut 391 732



B CUT

CE

EN 21420

EN 388

4X43B

EN 16350

Thin | Moderate Resistance | Good Fit for Hand | Compatible with Touch Screens | High Flexibility | Glass Fiber Free | High Level of Sensitivity for Fingertips | High Degree of Gripping | ESD

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Blue & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | White Goods | Aviation | Electronics | Logistic

SanCut 391 733



C CUT

CE

EN 21420

EN 388

4X43C

Thin | Moderate Resistance | Good Fit for Hand | Compatible with Touch Screens | High Flexibility | Glass Fiber Free | High Level of Sensitivity for Fingertips | High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | White Goods | Aviation | Electronics | Logistic | Metal Processing

Nitrile Foam-Coated Cut-Resistant Gloves

SanCut 391 734



D CUT

EN 21420

EN 388 4X44D

Thin · High Resistance · Good Fit for Hand · Compatible with Touch Screens · High Flexibility · Glass Fiber Free · High Level of Sensitivity for Fingertips · High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	18G
Thickness	0,95 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry · Automative · Transportation · White Goods · Aviation · Metal Processing · Plastic · Ceramic and Glass

SanCut 391 734T



D CUT

EN 21420

EN 388 4X44D

Thin · High Resistance · Good Fit for Hand · Compatible with Touch Screens · High Flexibility · Glass Fiber Free · High Level of Sensitivity for Fingertips · High Degree of Gripping

Coating	Foam Nitrile
Coating Colour	Black
Liner	Steel Fiber & HPPE & Polyester
Liner Colour	Black & White Melange
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Automative · Transportation · White Goods · Aviationspace - Aviation · Ceramic and Glass · Metal Processing · Wind Energy

SanCut Series

Uncoated Gloves

General Properties

Gloves lining manufactured using cut resistant threads.
High level of flexibility and permeability.

Areas of Usage

Surface control treatments, general usage, special applications

SanCut 030 704



D CUT

CE EN 21420

EN 407 X1XXXX

EN 388 1X42D

Breathable | High Level of Comfort | Good Fit for Hand

Coating	Uncoated
Liner	Steel Fİber & HPPE
Liner Colour	Black & White Melange
Gauge	13G
Thickness	0,80 mm
Size	7,8,9,10,11

Check it Now

Automative | Transportation | White Goods | Aviation | Solar Energy

SanCut 040 703



C CUT

CE EN 21420

EN 388 1X41C

Breathable | High Level of Comfort | Good Fit for Hand

Coating	Uncoated
Liner	Steel Fiber & Polyester & Spandex & HPPE
Liner Colour	Black & White Melange
Gauge	13G
Thickness	0,80 mm
Size	7,8,9,10,11

Check it Now

Automative | Transportation | White Goods | Aviation | Solar Energy

Micro Foam Coated Assembly Gloves

General Properties

An ultra-light, high-grip general-purpose glove designed for extended wear, offering anti-bacterial properties, high-level comfort, an excellent fit, and durability all in one. Featuring ESD (electrostatic discharge) protection thanks to carbon yarn (EN 16350:2014 certified), and is compatible with touch screens.

Areas of Usage

Light assembly and production lines, maintenance, quality control, areas requiring ESD protection

SanFoam+ 621 731

NEW

Ultra Light · High Resistance · Good fit for Hands · High Degree of Gripping · Compatible with Touch Screens · High Level of Comfort · ESD



EN 21420

EN 407 X1XXXX

EN 16350

EN 388 4X31A

Coating	Micro Foam
Coating Colour	Black
Liner	Carbon - Nylon & Spandex
Liner Colour	Blue-Black Melange
Gauge	18G
Thickness	0,9 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry · Automative · Transportation · White Goods · Aviationspace - Aviation · Solar Energy · Transportation · Electronics · Communication

General Properties

A lightweight, high-grip general-purpose glove designed for extended wear, offering anti-bacterial properties, high-level comfort, an excellent fit, and durability all in one.

Areas of Usage

General handling, packaging, material transport, assembly and production lines, light maintenance.

SanFoam+ 671 731

NEW

High Level of Comfort · High Resistance · Good fit for Hands · High Degree of Gripping



EN 21420

EN 407 X1XXXX

EN 388 4X31A

Coating	Micro Foam
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Grey-Black Melange
Gauge	15G
Thickness	0,9 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry · Automative · Transportation · Textile · Furniture · Aviationspace - Aviation · Plastic · Packaging

SanFoam Series

Nitrile Foam-Coated Assembly Gloves

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, light maintenance.

SanFoam 371 731



A CUT

CE

EN 21420

EN 407

X1XXXX

EN 388

4X31A

High Resistance | High Level of Comfort | High Degree of Gripping | Good fit for Hands | Sanitized

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Grey & Black Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | Logistic | Textile | Furniture | Aviationspace - Aviation | Plastic | Packaging



Nitrile Foam-Coated Assembly Gloves

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.

SanFoam 521 530



Thin · High Degree of Gripping · High Level of Comfort · High Resistance · Sanitized

CE

EN 21420

EN 407

X1XXXX

EN 388

4131X

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon
Liner Colour	Red
Gauge	15G
Thickness	0,80 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry · Logistic · Furniture · Textile · Plastic

SanFoam 521 731

A CUT



Lightweight · High Degree of Gripping · High Level of Comfort · Moderate Resistance · Sanitized

CE

EN 21420

EN 407

X1XXXX

EN 388

3X31A

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon
Liner Colour	Black & White Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry · Logistic · Textile · Furniture · Aviationspace - Aviation · Plastic · Packaging

SanFoam Series

Nitrile Foam-Coated Assembly Gloves

General Properties

General usage gloves; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, light maintenance.

SanFoam 571 241



A CUT

High Resistance | High Level of Comfort | High Degree of Gripping | Good fit for Hands | Sanitized

CE EN 21420

EN 407 X1XXXX

EN 388 4X31A

Coating	Foam Nitrile
Coating Colour	Grey
Liner	Nylon & Spandex
Liner Colour	White
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | Logistic | Textile | Furniture | Aviationspace - Aviation | Plastic | Packaging

SanFoam 571 331



A CUT

High Resistance | High Level of Comfort | High Degree of Gripping | Good fit for Hands | Sanitized

CE EN 21420

EN 407 X1XXXX

EN 388 4X31A

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Black
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | Logistic | Textile | Furniture | Aviationspace - Aviation | Plastic | Packaging

SanFoam 571 431



A CUT

High Resistance | High Level of Comfort | High Degree of Gripping | Good fit for Hands | Sanitized

CE EN 21420

EN 407 X1XXXX

EN 388 4X31A

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Grey
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | Logistic | Textile | Furniture | Aviationspace - Aviation | Plastic | Packaging

Nitrile Foam-Coated Assembly Gloves

SanFoam 571 731

A CUT

High Resistance | High Level of Comfort | High Degree of Gripping | Good fit for Hands | Sanitized



CE
EN 21420
EN 407
X1XXXX
EN 388
4X31A

Coating	Foam Nitrile
Coating Colour	Black
Liner	Nylon & Spandex
Liner Colour	Grey & Black Melange
Gauge	15G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | Logistic | Textile | Furniture | Aviationspace - Aviation | Plastic | Packaging

General Properties

Electrostatic discharge protection featured carbon lining, ESD-certified touch screens compatible.

Areas of Usage

Assembly of electrical/electronic components, light assembly and production lines, environments, requring ESD protection, general handling, light maintenance.

SanFoam 821 740

Lightweight | High Resistance | Compatible with Touch Screens | ESD | Good fit for Hands | High Level of Comfort | High Level of Sensitivity for Fingertips | High Degree of Gripping



CE
EN 21420
EN 388
4X21X
EN 16350

Coating	Foam Nitrile
Coating Colour	Grey
Liner	Carbon - Nylon & Spandex
Liner Colour	Blue & Black Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | White Goods | Aviation | Solar Energy | Logistic | Electronics | Communication

EcoCycle Series

EcoCycle Gloves

General Properties

General usage gloves made with recycled yarn; light, higher gripping feature, suitable for extended period usage, anti-bacterial, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, material handling, light assembly and production lines, dry gardening works, light maintenance.

EcoCycle 317 330

High Resistance | High Level of Comfort | High Degree of Gripping | Good fit for Hands | Sanitized



CE
EN 21420
EN 388
4X21X

Coating	Foam Nitrile
Coating Colour	Black
Liner	Recycle Polyester
Liner Colour	Black
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | Logistic | Textile | Furniture | Aviationspace - Aviation | Plastic | Packaging

EcoCycle 377 731

A CUT

High Resistance | High Level of Comfort | High Degree of Gripping | Good fit for Hands | Sanitized



CE
EN 21420
EN 407
X1XXXX
EN 388
4X31A

Coating	Foam Nitrile
Coating Colour	Black
Liner	Recycle Nylon & Spandex
Liner Colour	Green & Black Melange
Gauge	15G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Automative | Transportation | Logistic | Textile | Furniture | Aviationspace - Aviation | Plastic | Packaging

General Properties

Double-layer 3/4 and fully coated Nitrile work glove with high palm grip capability and abrasion resistance for oil/liquid applications.

SanSeal 442 460

Moderate Resistance · High Level of Comfort · Steel Free · Glass Fiber Free · High Degree of Gripping · Liquid-Proof



EN 21420

EN 388

4121X

Coating	Nitrile
Coating Colour	Blue & Black
Liner	Polyester
Liner Colour	Grey
Gauge	15G
Thickness	1,40 mm
Size	7,8,9,10,11

Check it Now

Metal Processing · Automative · Assembly Maintenance · Port Operation · Logistic · Mining · Construction · Agriculture

SanSeal 443 460

Moderate Resistance · High Level of Comfort · Steel Free · Glass Fiber Free · High Degree of Gripping · Liquid-Proof



EN 21420

EN 388

4121X

Coating	Nitrile
Coating Colour	Blue & Black
Liner	Polyester
Liner Colour	Grey
Gauge	15G
Thickness	1,40 mm
Size	7,8,9,10,11

Check it Now

Metal Processing · Automative · Assembly Maintenance · Port Operation · Logistic · Mining · Construction · Agriculture

General Properties

Double-layer fully coated Nitrile work glove providing high resistance to cuts and abrasion in oil/liquid applications. Its special palm coating enhances grip, while the inter- nger support ensures long-term use.

SanSeal 443 464

D CUT

High Resistance · High Level of Comfort · Steel Free · Liquid-Proof



EN 21420

EN 388

4X42D

Coating	Nitrile
Coating Colour	Blue & Black
Liner	HPPE
Liner Colour	Grey
Gauge	15G
Thickness	1,75 mm
Size	7,8,9,10,11

Check it Now

Metal Processing · Automative · Press Operations · Glass Handling · Handling Sharp-Edged Parts · Assembly Maintenance · Petrochemical · Mining

SanFit Series

PU-Coated Precision Assembly Gloves

General Properties

Assembly gloves; light weight, higher fingerType sensitivity, thin structure and good fit for hands, perfect price / performance ratio.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly of small parts.

SanFit 111 220

Lightweight | Moderate Resistance | Good fit for Hands | High Level of Sensitivity for Fingertips



EN 21420

EN 388

3X21X

Coating	Polyurethane
Coating Colour	White
Liner	Polyester
Liner Colour	White
Gauge	13G
Thickness	0,80 mm
Size	6,7,8,9,10,11

Check it Now

Furniture | Textile | Plastic | Pharmaceutical | White Goods | Automative | Transportation

SanFit 111 330

Lightweight | Moderate Resistance | Good fit for Hands | High Level of Sensitivity for Fingertips



EN 21420

EN 388

3X21X

Coating	Polyurethane
Coating Colour	Black
Liner	Polyester
Liner Colour	Black
Gauge	13G
Thickness	0,80 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry | Logistic | Furniture | Textile | Plastic

PU-Coated Precision Assembly Gloves

General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, offering maximum comfort and durability.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance, assembly small parts

SanFit 121 220

High Level of Comfort · High Resistance · Silicone-Free · Good fit for Hands · High Level of Sensitivity for Fingertips



CE
EN 21420
EN 388
4X31X

Coating	Polyurethane
Coating Colour	White
Liner	Nylon
Liner Colour	White
Gauge	13G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Furniture · Textile · Plastic · Pharmaceutical · White Goods · Automative · Transportation

SanFit 121 330

High Level of Comfort · High Resistance · Silicone-Free · Good fit for Hands · High Level of Sensitivity for Fingertips



CE
EN 21420
EN 388
4X31X

Coating	Polyurethane
Coating Colour	Black
Liner	Nylon
Liner Colour	Black
Gauge	13G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry · Automative · Transportation · White Goods · Aviationspace - Aviation · Logistic · Furniture · Textile · Plastic

SanFit 121 440

High Level of Comfort · High Resistance · Silicone-Free · Good fit for Hands · High Level of Sensitivity for Fingertips



CE
EN 21420
EN 388
4X31X

Coating	Polyurethane
Coating Colour	Grey
Liner	Nylon
Liner Colour	Grey
Gauge	13G
Thickness	0,90 mm
Size	6,7,8,9,10,11

Check it Now

Light Manufacturing Industry · Automative · Transportation · White Goods · Aviationspace - Aviation · Logistic · Furniture · Textile · Plastic

SanFit Series

PU-Coated Precision Assembly Gloves

General Properties

Working gloves; ultra-light weight, offering maximum fingertip sensitivity, easily tearable.

Areas of Usage

Light assembly works, working with small pieces and applications for which the fingertip sensitivity is very important.

SanFit 116 330



CE
EN 21420


EN 388
3X31X

Good fit for Hands | Lightweight | Ultra Thin | Silicone-Free | Easy Fragmentation | High Level of Sensitivity for Fingertips | Low Resistance

Coating	Polyurethane
Coating Colour	Black
Liner	Polyester & Nylon & Spandex
Liner Colour	Black
Gauge	18G
Thickness	0,50 mm
Size	6,7,8,9,10,11

Check it Now

Automative | Transportation | White Goods | Aviationspace - Aviation | Electronics | Communication

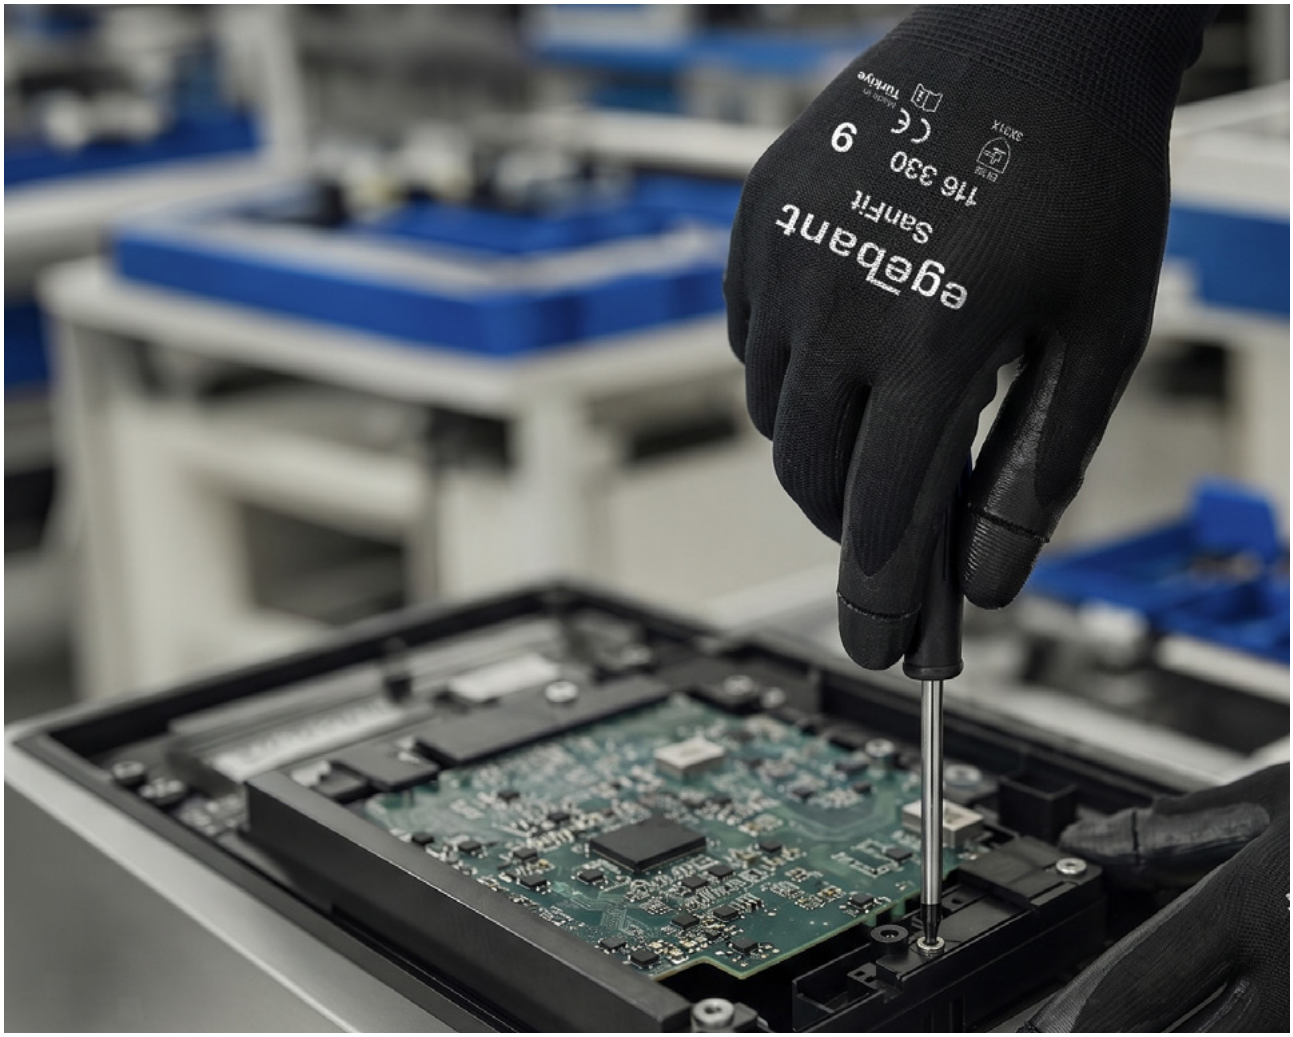

PU-Coated Precision Assembly Gloves

General Properties

Assembly and general work gloves; light, higher fingertip sensitivity, suitable for extended period usage, comfortable, fits adaptively to hands.

Areas of Usage

General handling, packaging, light assembly and production lines, dry gardening works, light maintenance.

SanFit 161 330



EN 21420

EN 388

3X21X

High Level of Comfort | Good fit for Hands | Moderate Resistance | Silicone-Free | High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Polyester & Spandex
Liner Colour	Black
Gauge	13G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Automative | Transportation | White Goods | Aviationspace - Aviation | Light Manufacturing Industry | Wind Energy | Logistic | Furniture | Textile

General Properties

Working gloves; ultra-light weight, offering maximum FingerType sensitivity, easily tearable.

Areas of Usage

Light assembly works, working with small pieces and applications for which the FingerType sensitivity is very important.

SanFit 166 330



EN 21420

EN 388

1000X

Ultra Thin | Ultra Light | Easy Fragmentation | Silicone-Free | Low Resistance | Good fit for Hands | High Level of Sensitivity for Fingertips

Coating	Polyurethane
Coating Colour	Black
Liner	Polyester & Spandex
Liner Colour	Black
Gauge	18G
Thickness	0,50 mm
Size	6,7,8,9,10,11

Check it Now

Automative | Transportation | White Goods | Aviationspace - Aviation | Electronics | Communication

SanFit Series

PU-Coated Precision Assembly Gloves

General Properties

Electrostatic discharge protection featured carbonlining, ESD-certified, touch screens compatible.

Areas of Usage

Assembly of electrical/electronic components, light assembly and production lines, ESD environments, assembly of small parts.

SanFit 721 740

Lightweight · High Resistance · Compatible with Touch Screens · ESD · Good fit for Hands · High Level of Comfort · High Level of Sensitivity for Fingertips



CE

EN 21420

EN 388

4X21X

EN 16350

Coating	Polyurethane
Coating Colour	Grey
Liner	Carbon - Nylon & Spandex
Liner Colour	Blue & Black Melange
Gauge	18G
Thickness	1,00 mm
Size	6,7,8,9,10,11

Check it Now

Automative · Transportation · White Goods · Aviation · Electronics · Communication · Light Manufacturing Industry · Solar Energy

Uncoated

General Properties

Glove liner made of nylon yarn. Maximum mobility and breathability.

Areas of Usage

Surface inspection processes, general use, special applications.

SanFit 020 200

Lightweight · Breathable · Silicone-Free · Low Resistance



CE

EN 420

Coating	Uncoated
Liner	Nylon
Liner Colour	White
Gauge	15G
Thickness	0,70 mm
Size	6,7,8,9,10

Check it Now

Automative · Transportation · White Goods · Aviation · Electronics · Solar Energy · Pharmaceutical · Social Services

General Properties

It is produced by coating Nitrile on a soft, cotton lining.

Areas of Usage

General handling, dry gardening works, construction and building works, general rough works.

NP01



A CUT

EN 21420

EN 388

3X11A

Moderate Resistance · Liquid-Proof · High Level of Comfort

Coating	Nitrile
Coating Type	3/4
Colour Options	Yellow, Blue
Liner	Cotton
Liner Colour	Ecru
Thickness	0,80 mm
Size	8,9,10

Check it Now

Heavy Industry · Mining · Agriculture · Construction

NP02



A CUT

EN 21420

EN 388

3X11A

Moderate Resistance · Liquid-Proof · High Level of Comfort

Coating	Nitrile
Coating Type	Fully
Colour Options	Yellow, Blue
Liner	Cotton
Liner Colour	Ecru
Thickness	0,90 mm
Size	8,9,10

Check it Now

Heavy Industry · Mining · Agriculture · Construction

NP03



A CUT

EN 21420

EN 388

4111A

High Resistance · Liquid-Proof · Steel Free

Coating	Nitrile
Coating Type	Fully
Coating Colour	Blue
Liner	Cotton Jersey
Liner Colour	White
Thickness	1,40 mm
Size	9,10,11

Check it Now

Metal Processing · Automative · Press Operations · Construction · Heavy Part Handling · Petrochemical · Woodworking · Waste Disposal

GLOVE STANDARTS

Glove Standards

Personal Protective Equipment Regulation (EU) 2016/425

The PPE Regulation classifies personal protective equipment (PPE) into three categories based on risk levels:

Category I: PPE Protection Against Minor Risks

Includes gloves and sleeves designed to protect against minimal risks, such as superficial mechanical injuries and cleaning-related hazards. Manufacturers are allowed to self-test and certify their products.

Category II: PPE Protection Against Moderate Risks

Hand and arm protection designed to safeguard against cuts, abrasions, punctures, and tears. This category of products must undergo independent testing and be certified by an accredited notified body.

Once approved, the product will receive a CE marking from the notified body. In the EU, no PPE can be sold or used without the CE marking. The name and address of the notified body issuing the CE marking must be included in the user instructions provided with the product. Performance must be continuously monitored through testing.

Category III: PPE Protection Against Fatal or Irreversible Injuries

PPE in this category involves risks that can lead to very serious consequences, such as death or irreversible harm to health, including exposure to chemicals, hazardous biological substances, extreme temperatures, and cuts caused by chainsaws.
PPE must undergo independent testing and certification in the same manner as Category II products. The quality assurance system used by the manufacturer must also be independently inspected, and the identification number of the notified body must appear next to the CE mark in the user instructions.

Continuous monitoring of performance and production processes should be carried out through product testing and factory inspections.

EN ISO 21420:2020

General Requirements for Protective Gloves

Most types of protective gloves must meet the following general requirements:

- Glove construction
- Ergonomics
- Dexterity
- Harmlessness
- Product marking and packaging information
- Sizing
- Water vapor transmission and absorption
- Electrostatic properties

Glove Standards



EN 388

Protection Against Mechanical Risks

The EN 388:2016 standard applies to protective gloves against mechanical risks. This standard is used to determine the capacity of certain types of gloves to provide protection against abrasion, cuts, tears, and punctures. It classifies and defines the resistance levels of gloves against these hazards.

a. Abrasion Resistance: Based on the number of cycles required to wear through the glove material.


b. Cut Resistance: Based on the number of cycles required to cut through the glove at a fixed speed.

c. Tear Resistance: Indicates the force required to tear the glove.

d. Puncture Resistance: Specifies the force needed to puncture the glove.

e. Cut Resistance (ISO 13997 Test Method): The force required to cut a sample using a specific cutting machine under defined conditions.

f. Impact Protection: Based on measured energy and force transmission when the glove is subjected to an impact load.

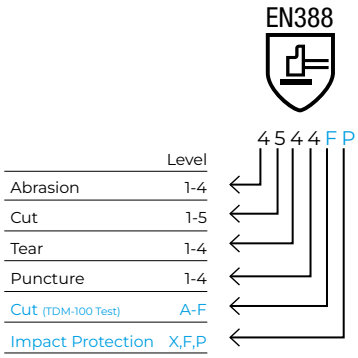





EN 407:2004

Protection Against Thermal Hazards

Scope

This standard determines the level of protection a glove provides against heat and flames. It plays a crucial role in selecting gloves for workers exposed to various heat sources and flames. The heat and flame pictogram is accompanied by a six-digit performance rating, representing the glove's resistance levels under specific thermal conditions.

The 'Heat and Flame' symbol includes six performance criteria:

a. Resistance to Flammability (Performance Level: 0 – 4)

b. Contact Heat Resistance (Performance Level: 0 – 4)

c. Convective Heat Resistance (Performance Level: 0 – 4)

d. Radiant Heat Resistance (Performance Level: 0 – 4)

e. Resistance to Small Splashes of Molten Metal (Performance Level: 0 – 4)

f. Resistance to Large Splashes of Molten Metal (Performance Level: 0 – 4)



EN 511


Protection Against Cold

Scope

This European standard regulates the manufacture and sale of protective gloves resistant to thermal cold, cold air, and water. It applies to all gloves designed to protect hands against convective and contact cold down to -50°C.

Gloves providing protection against cold are tested based on three performance criteria, with results displayed under the cold protection pictogram:

a. Resistance to Convective Cold (Performance Level: 0 – 4)
b. Resistance to Contact Cold (Performance Level: 0 – 4)
c. Water Penetration Resistance (Performance Level: 0 or 1)



EN 374-2

Protection Against Chemicals and/or Microorganisms

The EN 374-2 standard determines a glove's ability to protect against liquid and gas permeability. This is particularly important for users handling hazardous liquids or gases, as it helps assess whether the glove can effectively prevent substance penetration. A glove's permeability resistance plays a critical role in protecting the user's skin from potential hazards.

The permeation performance of gloves defines their resistance to chemicals over a specific period. Based on EN 374-1 and EN 374-2 standards, gloves are classified according to their permeability performance, indicating how long they can protect against a specific chemical.

The EN 374-4:2013 standard evaluates how long gloves can maintain their protective properties when exposed to chemical substances. This test measures the glove's resistance duration and its ability to retain protection over time. This information is essential in determining how frequently gloves should be replaced.

The EN ISO 374-5:2016 standard assesses a glove's ability to protect against microorganisms. It measures the glove's effectiveness in reducing the number of microorganisms on its surface and interior. This is particularly crucial for users exposed to biological hazards, as it indicates how well the glove can protect against potential infections.

Requirements	Marking
Permeation resistance (EN 374-2): The penetration time must be ≥ 30 minutes for at least six chemicals listed in the table (EN 16523-1).	EN ISO 374-1/ Type A AJKLOT
Permeation resistance (EN 374-2): The penetration time must be ≥ 30 minutes for at least three chemicals listed in the table (EN 16523-1).	EN ISO 374-1/ Type B AJK
Permeation resistance (EN 374-2): The penetration time must be ≥ 10 minutes for at least one chemical listed in the table (EN 16523-1).	EN ISO 374-1/ Type C K
For gloves providing protection against bacteria and fungi.	EN ISO 374-5
For gloves providing protection against bacteria and fungi.	EN ISO 374-5 VIRUS

Glove Standards

EN 16350

EN 16350

Test Standard for Electrostatic Properties


The EN 16350 standard defines the requirements and test methods for the electrostatic properties of protective gloves. It outlines additional requirements for gloves worn in environments where flammable or explosive atmospheres are present or may occur. This standard also provides a performance, marking, and information test method for protective gloves designed to dissipate electrostatic energy and minimize explosion risks.

It ensures that gloves protect operators in hazardous and explosive environments by preventing electrostatic discharge and its consequences. To ensure that electrostatic charges do not accumulate on the glove and are effectively transferred to the rest of the clothing for dissipation, the glove must have a sufficient level of electrical conductivity.

According to this standard, the glove's vertical electrical resistance (its ability to prevent electrostatic charge movement) must be less than 10^8ohms. The lower the resistance value, the more conductive the glove, and thus, the lower the risk for the operator.

Glove Size and Measurement Chart

Glove Size	Hand Circumference (mm)
6	152
7	178
8	203
9	229
10	254
11	279

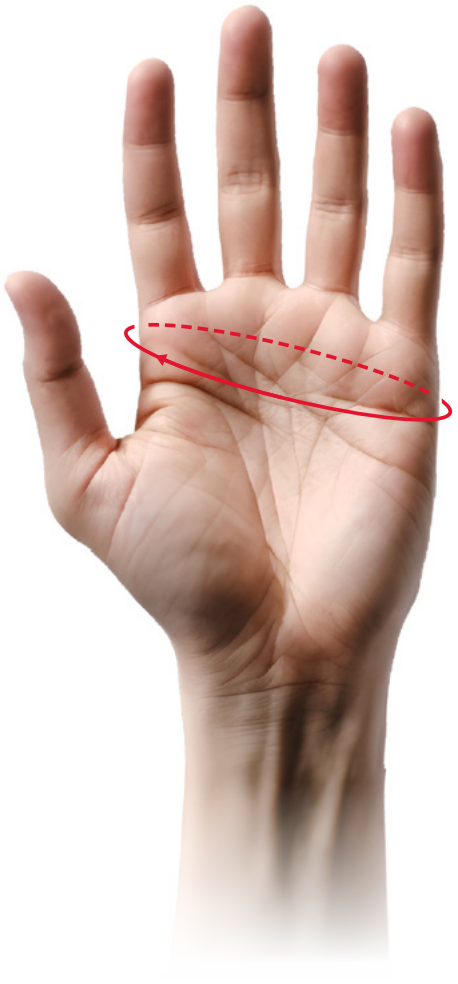

Glove Coating Types

Polyurethane Coating

1. Polyurethane is a thin and breathable coating that is also used in synthetic leather production.
2. It can quickly dissipate heat from the hand, helping to reduce sweating.
3. It is used in tasks where high fingerType sensitivity is essential.

Foam Nitrile Coating

1. Foam nitrile coating is oil-resistant due to the nitrile it contains.
2. Its porous structure allows breathability and makes it easier to grip oily parts.
3. The relatively thick structure of foam nitrile coating enhances comfort when handling heavy parts, acts as a cushion for the hand, and reduces pressure force.

Nitrile Coating

1. Thanks to its non-porous coating structure, it prevents mineral oils, water, and certain chemicals from penetrating the glove. For this reason, this type of coating is preferred in wet and oily work environments.
2. It can be used in dry, lightly oiled, or oily work environments.


Double Coating (Double-Dipped Nitrile Coating)


1. The first layer prevents the penetration of oil and liquids, while the second layer enhances grip, making it easier to hold oily or wet parts without slipping.
2. Suitable for use in oily and wet work environments.

Glove Coating Types

GAUGE (Knitting Tightness)

1. The gauge number represents the knitting density and indicates the number of stitches per inch on the glove.
2. As the gauge number increases, the knitting tightness also increases. Common gauge numbers include 7, 10, 13, 15, 18, and 21.
3. Thin and high-durability gloves can be produced using high-gauge knitting machines.

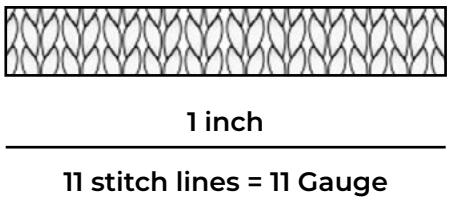

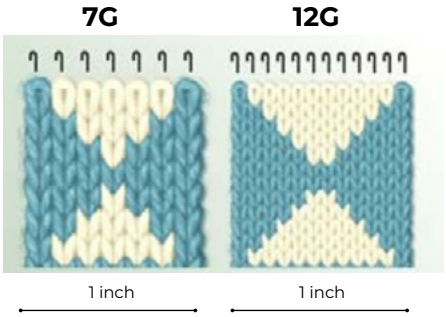

Yarns

Cotton	Natural, comfortable, and flexible
Polyester	Flexible, high durability, synthetic fiber
Nylon (Nylon)	Flexible, high durability, highly comfortable synthetic fiber
HPPE/UHMWPE	Cut-resistant synthetic fiber
Aramid / P. Aramid	Cut- and heat-resistant synthetic fiber
Spandex	Used to ensure a snug fit of the glove. (Elastane)
Metal Fiber	Auxiliary fiber that enhances cut resistance and conductivity.
Glass Fiber	Auxiliary fiber that enhances cut resistance.
Carbon Fiber	Auxiliary fiber that enhances conductivity.


egebant
SanFoam
Sanitized
371 731 9
EN 388
EN 407
4X31A X1XXXX
Made in Türkiye
egebant
Made in Türkiye

ADHESIVE TAPES



www.egebant.com.tr

Adhesive Tapes

Product Features

- General purpose packaging tape.
- It is suitable for light and medium weight carton closure.
- Suitable for use with handheld dispenser and automatic packaging machines
- Can be produced at any desired width and length



Product Code	Carrier	Adhesive Type	Colour	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Sander PP5231	BOPP	Synthetic Rubber	Transparent / Brown / White	25 mic.	% 145	60 °C	General purpose packaging tape.
Egebant PP31	BOPP	Synthetic Rubber	Transparent / Brown / White	28 mic.	% 145	60 °C	General purpose packaging tape.
Egebant PP30S	BOPP	Natural Rubber	Transparent / Brown / White	28 mic.	% 145	60 °C	General purpose packaging tape.
Egebant PP35	BOPP	Natural Rubber	Transparent / Brown / White	35 mic.	% 145	60 °C	General purpose packaging tape.
Egebant PVC 330	PVC	Natural Rubber	Transparent / Brown / White	33 mic.	% 145	60 °C	General purpose packaging tape.
Egebant Kraft Tape	Kraft Non Woven	Natural Rubber	Brown	105 mic.	% 6	60 °C	General purpose packaging tape.



Masking Tapes

Product Features

- Can be removed without leaving a residue
- Solvent-resistant
- Temperature resistance
- Easy tear
- Controlled expansion
- Conformability to stretch and adhere round curves
- High initial adhesion



Product Code	Carrier	Adhesive Type	Thickness	Temperature Resistance (°C)	Application Areas
Sander 6127	Crepe Paper	Natural Rubber	110 mic.	30 °C	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant MSK60	Crepe Paper	Natural Rubber	125 mic.	80 (30 °C)	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant MSK6280	Crepe Paper	Natural Rubber	130 mic.	100 (30 °C)	High heat resistance, wet sanding and tiner-like chemical resistance, a general purpose masking tape. Up to 100 degree heat resistance.
Egebant MSK100	Waterproof Crepe Paper	Natural Rubber	140 mic.	120 (30 °C)	General purpose masking tape. Very high heat resistance, resistant to wet sanding and filling materials, thinner infrared light, durable and resistant to chemicals. Up to 120 degrees heat resistance
Egebant P40	PET	Silicon	60 mic.	180 (30 °C)	High-Temperature powder paint masking tape.
Egebant 6268	Crepe Green Paper	Natural Rubber	125 mic.	80 (30 °C)	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant 6265	Blue Crepe Paper	Natural Rubber	125 mic.	80 (30 °C)	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Egebant 6267	Orange Crepe Paper	Natural Rubber	125 mic.	80 (30 °C)	General purpose masking tape. Construction industry, automotive industry, white goods sector and cable bundling.
Maskopri	Paper / HDPE Film	Natural Rubber	125 mic.	80 (30 °C)	The film is electrostatically loaded to stick to whole surface. Recommended for professional, industrial and DIY applications.

Duct Tapes

Product Features

- Hand-tearable
- Moisture resistant
- Can adhere to most surfaces
- High tensile strength
- Waterproof, suitable for many repair applications.



Product Code	Carrier	Adhesive Type	Colour	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Egebant TPL201	PE Coated Cloth	Synthetic Rubber	Black / White / Grey	180 mic.	% 10	60 °C	It is a general purpose cloth tape.
Egebant TPL204	PE Coated Cloth	Synthetic Rubber	Grey	155 mic.	% 13	60 °C	It is a multi-purpose, single-sided repair tape.
Egebant CT1604	PE Coated Cloth	Synthetic Rubber	Grey	160 mic.	% 10	60 °C	It is a general purpose cloth tape.

Strapping Tapes

Product Features

- No residue left on the surface after sticking.
- Used for strapping plastic and metal parts in White Goods Industry.
- High UV resistance.



Product Code	Carrier	Adhesive Type	Colour	Thickness	Temperature Resistance (°C)	Application Areas
Egebant PP550	MOPP	Natural Rubber	Blue / White	55 mic.	60 °C	General-purpose strapping tape.
Egebant PP505	MOPP	Natural Rubber	White	70 mic	60 °C	General-purpose strapping tape.
Egebant PP850	MOPP	Natural Rubber	Blue / White	113 mic.	60 °C	General-purpose strapping tape.
Egebant PP855	MOPP	Natural Rubber	Blue	113 mic.	60 °C	General-purpose strapping tape.

Filament Tapes

Product Features

Reinforced with glass fiber packaging and bundling tape.



Product Code	Carrier	Adhesive Type	Colour	Thickness	Elongation (%)	Temperature Resistance (°C)	Application Areas
Egebant FG10	Reinforced with fiberglass BOPP	Synthetic Rubber	Clear / White	120 mic.		60 °C	It is a flat-woven palletizing belt.
Egebant FGBD	Reinforced with fiberglass BOPP	Synthetic Rubber	Clear / White	120 mic.		60 °C	It is a cross-woven palletizing belt.
Egebant ST300	MOPP	Synthetic Rubber	Clear	50 mic.		60 °C	It is used as a conveyor belt in food and beverage packaging.
Egebant GL96	Fiberglass	Silicon	White	165 mic.	% 3,5	250 °C	It is a high-temperature resistant fiberglass cloth tape, reinforced on one side.

Aluminium Tapes

Product Features

- High resistance to moisture and chemicals
- Thermal conductivity
- Heat and light reflectance
- Flame resistance
- Strength of the external environment
- Vibration damping and isolation



Product Code	Carrier	Adhesive Type	Colour	Thickness	Tensile Strength	Temperature Resistance (°C)	Application Areas
Egebant AF1825	Al.Foil	Acrylic	Metallic Gray	18 mic.	40	150 °C	General purpose insulation applications
Egebant AF3025	Al.Foil	Acrylic	Metallic Gray	30 mic.	40	150 °C	General purpose insulation applications
Egebant AF4025	Al.Foil	Acrylic	Metallic Gray	40 mic.	40	150 °C	General purpose insulation applications
Egebant AF5025	Al.Foil	Acrylic	Metallic Gray	50 mic.	40	150 °C	General purpose insulation applications
Egebant AF7525	Al.Foil	Acrylic	Metallic Gray	75 mic.	60	150 °C	General purpose insulation applications
Egebant TT9934	Al.Foil	Acrylic	Metallic Gray	150 mic.	275	150 °C	General purpose insulation applications
Egebant TT9940	BOPP - Al.Foil	Acrylic	Metallic Gray	90 mic.	105	150 °C	It is a BOPP coated adhesive aluminium tape having high tensile strenght. Used in white goods sector and aluminium panels bonding.
Egebant AF5025 WL	Al.Foil	Acrylic	Metallic Gray	90 mic.	40	120 °C	HVAC

Double Sided Tapes

General Properties

- High initial adhesion
- Easy to tear by hand
- Designed to bond to low surface energy plastic



Product Code	Carrier	Adhesive Type	Colour	Thickness	Temperature Resistance (°C)	Application Areas
Egebant TNT710	Non Woven	Synthetic Rubber	Translucent	100	60 °C	Usually laminated foam operations, cardboard, metal and adding used.
Egebant D022A	Non Woven	Acrylic	Translucent	100	120 °C	For general purposes, wood, metal, glass, paper, plastic used for welding
Egebant 6750	Non Woven	Acrylic	Blue	100	200 °C	Has a high initial adhesive strength and high-speed coil Adding used
Egebant TNT710/160	Non Woven	Synthetic Rubber	Translucent	160	60 °C	Laminated foam operations, cardboard and general purpose
Egebant VX160	Non Woven	Synthetic Rubber	Translucent	160	60 °C	Laminated foam operations, cardboard and general purpose
Egebant 90HX	None	Acrylic	Translucent	110	90 °C	Cross Linked Transfer Tape

Film Backing Tapes

Product Features

- Ease of use
- PVC, PET, cloth, fabric and OPP carriers
- Kinds of acrylic and rubber adhesive
- High and low surface energy good adhesion to the product
- High initial adhesion force



Product Code	Carrier	Adhesive Type	Colour	Thickness	Temperature Resistance (°C)	Application Areas
Egebant RDA700	OPP	Synthetic Rubber	Clear	98	60 °C	General purpose
Egebant PT150	PET	Modified Acrylic	Clear	150	120 °C	Bonding of metal panels and mirrors
Egebant PT205	PET	Modified Acrylic	Clear	205	120 °C	Bonding of metal panels and mirrors
Egebant D5082	PET	Acrylic	Clear	100	90 °C	General purpose
Egebant D5028	PET	Acrylic	Clear	125	90 °C	General purpose
Egebant D2040	PET	Acrylic	Clear	95	90 °C	General purpose

Foam Tapes

Product Features

- Flexibility and space-filling
- Bonding rough or irregular surfaces
- Vibration and noise isolation
- Impact resistance
- Heat resistance



Product Code	Carrier	Adhesive Type	Colour	Thickness (mm)	Temperature Resistance (°C)	Application Areas
Egebant FT 67	PE Foam	Acrylic	White	1,0	90 °C	General purpose bonding solutions used in outdoor environments.
Egebant FT 67	PE Foam	Acrylic	Black	1,0	90 °C	General purpose bonding solutions used in outdoor environments.
Egebant 1100R+	Acryled Foam	Acrylic	White	1,1	120 °C	General purpose bonding solutions used in outdoor environments.
Egebant 71100	Acryled Foam	Acrylic	Black / White	1,1	120 °C	General purpose bonding solutions used in outdoor environments.
Egebant 640R+	Acryled Foam	Acrylic	White	0,64	120 °C	General purpose bonding solutions used in outdoor environments.
Egebant 70080	Acryled Foam	Acrylic	Black / Grey	0,8	120 °C	General purpose bonding solutions used in outdoor environments.
Egebant 500R	Acryled Foam	Acrylic	Clear	0,5	120 °C	General purpose bonding solutions used in outdoor environments.
Egebant 1000R	Acryled Foam	Acrylic	Clear	1,0	120 °C	General purpose bonding solutions used in outdoor environments.

Pe Freezer Tapes




Product Code	Carrier	Adhesive Type	Colour	Thickness	Tensile Strenght	Adhesive N/25mm	Application Areas
Egebant TT6405	LDPE	Synthetic Rubber	White	73 mic.	28	13	Used in Evap coil winding in white goods industry. Polyurethane has a high binding capacity. Strong resistance against cold.
Egebant TT6400	LDPE	Synthetic Rubber	White	85 mic.	30	20	Used in Evap coil winding in white goods industry. Polyurethane has a high binding capacity. Strong resistance against cold.

Isolation Plate

Product Features

Adhesive laminated Policarbonate or PVC plates, to isolate electronic components, in electronic devices.













Refrigerator Back Carton Plates







Product Features


- Aluminium and PE laminated carton for refrigerator back panels.
- Can be converted indifferent dimensions and shapes.


Frameless Tapes




Product Features

- Adhesive laminated Polyurethane or Silicone strips for TV production.
- Different friction and shore levels
- Can be converted into different lengths and widths.

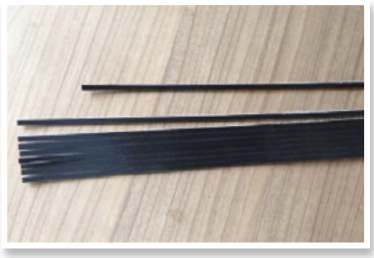

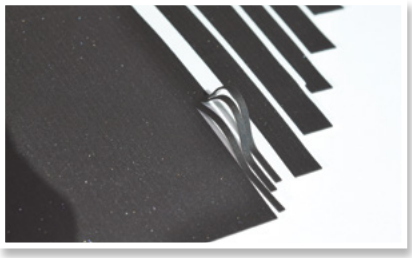


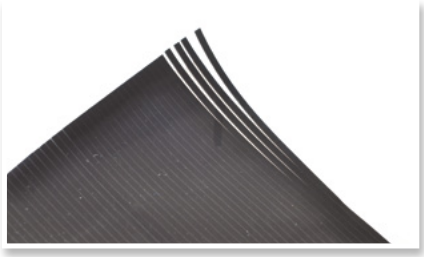

Die-Cut Kiss-Cut Product

Product Features

Adhesive laminated foams. Die cut, kiss cut, double sided tape, Aluminium Tapes.

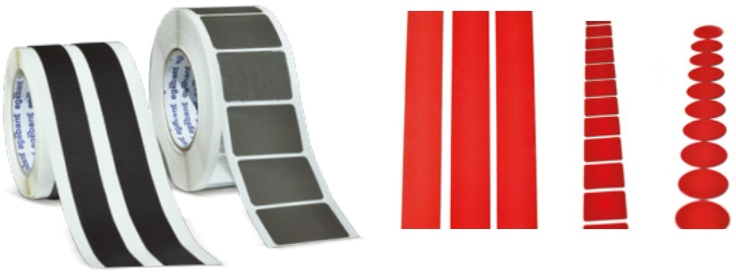


egebant
Sanour D
9
391 734


egebant
Max. Speed 80m/s
MAX. 13300 RPM
LOT NO: 14.02.2014
ALOX
60
309X
FLAP DISK
115x22 mm
4 1/2"x7/8
Made in TURKEY
GRIT NO.
60


egebant



ABRASIVES

Wide Abrasive Belts

Product Features

Suitable for all sanding and grinding operations: with unsupported belt, sander pad and contact wheel

Wide range of sizes

Paper and cloth backed


All products with high tensile strength and optimum streching resistance



Applications

- Steel
- Wood
- Stainless Steel
- Paint / Varnish / Filler
- NF Metal
- Plastic
- Glass

Adhesive Types




Mineral	Backing	Grain
Aluminium Oxide	Polyester, Paper, Cloth ,X-Cloth	P24-P1200
Zirconium	Polyester, Paper ,X-Cloth	P24-P400
Ceramic	Polyester, Paper ,X-Cloth	P24-P400
Silicon Carbide (SIC)	Polyester, Paper, Cloth	P24-P800

Segmented Belts

Product Features

Exceptionally tear-resistant type of polyester.

The perfectly balanced ACT recipe allows for a long service life combined with an excellent removal rate.

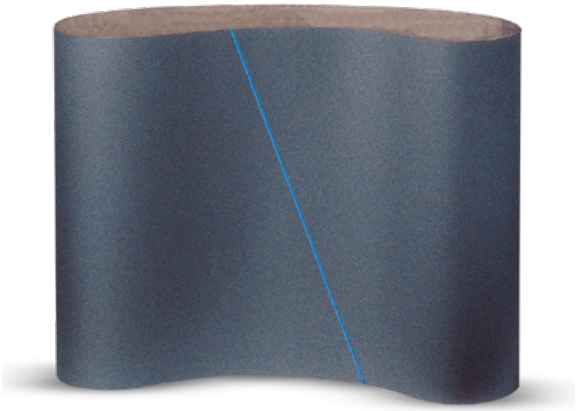

Applications

- Calibrating, intermediate sanding and finishing

Materials

- Chipboard
- OSB board MDF and HDF board

Mineral	Backing	Grain
Silicon Carbide (SIC)	Y Polyester Paper	P24-P180 P40-P800

Velcro / Psa Discs

Product Features


Suitable for orbital and rotary machines. These sandpapers, which have a wide range of sizes and holes, are suitable for wet and dry use, and also have cloth and film backing options.




Applications

- Steel
- Stainless Steel
- Wood
- Paint / Varnish / Filler
- Plastic
- Metals
- Glass
- Stone


Mineral	Backing	Grain
Aluminium Oxide	Paper, Cloth, Film	P24-P2000
Zirconium	Paper, Cloth	P24-P400
Ceramic	Paper, Cloth, Film	P24-P400
Silicon Carbide (SIC)	Paper, Cloth	P24-P800




D1
9 Hole
Diameter 76 mm,
115 mm,125 mm,
150 mm,180 mm,
200 mm, 250 mm




D2
8 Hole
Diameter 76 mm,
115 mm,125 mm,
150 mm,180 mm,
200 mm, 250 mm




D3
6 Hole
Diameter 76 mm,
115 mm,125 mm,
150 mm,180 mm,
200 mm, 250 mm




D4
8 Hole
Diameter 76 mm,
115 mm,125 mm,
150 mm,180 mm,
200 mm, 250 mm



D5
8 Hole
Diameter 76 mm,
115 mm,125 mm,
150 mm,180 mm,
200 mm, 250 mm



D6
8 Hole (Outside)
8 Hole (Inside)
Diameter 76 mm,
115 mm,125 mm,
150 mm,180 mm,
200 mm, 250 mm



200 mm, 250 mm


D7
8 Hole (Outside)
8 Hole (Inside)
Diameter 76 mm,
115 mm,125 mm,
150 mm,180 mm,
200 mm, 250 mm
1 hole in the belly

Foam and Sponge Sanding Pads/Discs

Product Features

Flexible abrasives for countered surfaces

Due to its sponge backing, suitable for all profile surfaces

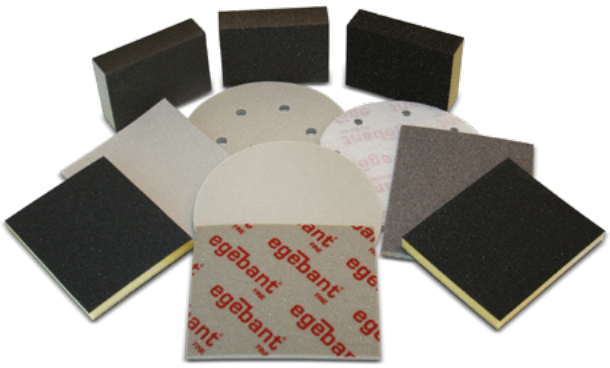

Dimension	Type
96x66x25 mm	Cubic
96x123x12,5mm	Flat
115x140x5mm	Flat
Disc	

Foam-Backed Abrasive Rolls

Product Features

High quality flexible aluminium oxide abrasive rolls.

Due to its foam backing, suitable for all surfaces.

Very good performance on most woods, paint, varnish and lacquer.



Dimension	Grit Range
115 x 25 mm	40-2000

Flap Wheels

Product Features

An abrasive mop is a popular choice across a wide variety of applications.

These include:

Grinding fillet welds

Deburring operations,

Removal of heat tinting

Rust removal on steel



Applications

- Paint / Varnish / Filler
- Wood
- Plastic
- Metals

Grit	Unit / Box
100 x 50	2
100 x 100	1
150 x 30	1
150 x 50	1
165 x 30	3
165 x 50	2
200 x 50	1
250 x 50	1
300 x 30	1
300 x 50	1
350 x 50	1
350 x 100	1
380 x 75	1
410 x 30	1
410 x 50	1
410 x 100	1

Grain
P36
P40
P60
P80
P120
P180
P220
P240
P400
P800

Mineral
Aluminium Oxide
Zirconium
Silicon Carbide

Spindle Mounted Flap Wheels

Product Features

Suitable for use on metal and wood surfaces.

Applications

- Wood
- Plastic
- Metals



Grit	Unit / Box
30 x 10 x 6	100
30 x 15 x 6	100
40 x 15 x 6	50
40 x 20 x 6	50
40 x 25 x 6	50
40 x 30 x 6	50
50 x 10 x 6	20
50 x 15 x 6	20
50 x 20 x 6	20
50 x 25 x 6	20
50 x 30 x 6	20
50 x 40 x 6	20
60 x 10 x 6	20
60 x 15 x 6	20
60 x 20 x 6	20
60 x 25 x 6	20
60 x 30 x 6	20
60 x 40 x 6	10
60 x 50 x 6	10
80 x 15 x 6	10
80 x 20 x 6	10
80 x 25 x 6	10
80 x 30 x 6	10
80 x 40 x 6	9
80 x 50 x 6	9

Grain
P36
P40
P60
P80
P120
P180
P220
P320
P400
P800

Grain
Aluminium Oxide
Zirconium
Silicon Carbide

Threaded Flap Wheel

Product Features

Our threaded flap wheels are used for stock removal, finishing etc. on flat or different forms of surfaces. It is suitable for surface sanding operations.

Can be used on all standard angle grinders(M14) (80 m/s).

It can be easily removed and installed without the help of any tools.



Applications

- Paint
- Plastic
- Wood
- Metal

Grain	Grit	P40 - P400	Unit / Box
Aluminium Oxide	115 x 25 mm		5

Slashed Flap Wheel

Product Features

It adapts to profiled surfaces thanks to its fringed leaves.



Applications

- Paint
- Plastic
- Wood
- Metal

Grain	Grain
Aluminium Oxide	P36-P800
Ceramic	P36-P800

CSD Flap Wheels

Product Features

For removing paint, varnish and rust.



Applications

- Metal
- Paint
- Plastic

Grain	Colour	Size
Silicon Carbide (SIC)	Black	100 x 13
	Blue	150 x 13
	Purple	100 x 10 X 6
		100 x 20 X 6
		100 x 100 X 20

V-TYPE Flap Wheel

Product Features

It is suitable for sanding surfaces in corner welds and hard-to-reach spots.



Applications

- Welding
- Metals

Grain	Grain P40 - P400	Unit / Box
Aluminium Oxide	160 x 14 mm	10
Zirconium	160 x 20 mm	10

Combi Flap Wheels

Product Features

Alternating flaps of coated and non-woven materials will cut and finish in a single step. Ideal for surface conditioning on metal parts.



Applications

- Fiberglass
- Metal
- Paint
- Plastic

Non-Woven Flap Wheels



Product Features

Alternating flaps of coated and non-woven materials will cut and finish in a single step.Ideal for surface conditioning on metal parts.

Applications

- Fiberglass
- Metal
- Paint
- Plastic

Mineral			
Aluminium Oxide			
Zirconium			
Silicon Carbide			
A. Coarse S. Medium	A. Medium S. Fine	A. Fine S. Very Fine	A. Very Fine S. Ultra Fine

Diameter	Unit / Box
100	2
100	1
150	3
150	2
165	3
165	2
200	1
200	1
250	1
250	1
300	1
300	1
350	1
350	1
350	1
400	1
400	1
400	1

Spindle Mounted Nonwoven Flap Wheels

Product Features

Ideal for satination or surface development on the surfaces of metal materials. Thanks to its flexible structure, it adapts to any surface. It is suitable for use with hand machines. (6 mm)

Ideal for surface conditioning on metal parts .



Spindle Mounted Nonwoven Mop	Spindle Mounted Combi-Mop	Unit / Box
40 x 20 x 6		50
50 x 20 x 6		20
50 x 30 x 6		20
60 x 15 x 6		20
60 x 30 x 6		20
80 x 40 x 6		9
80 x 50 x 6		9

Nonwoven	Combi	Abrasive
	100 x 10	
	100 x 15	
	100 x 20	
	100 x 30	

A. Coarse S. Medium	A. Medium S. Fine	A. Fine S. Very Fine	A. Very Fine S. Ultra Fine

Nonwoven Rolls

Product Features

Suitable for hand use in surface development applications.

Nonwoven Rolls
A.COARSE
A.MED
A.FINE
A.V.FINE
S.MED
S.FINE
S.V.FINE
S.U.FINE
GREEN

A.	Alox	Red
S.	Sic	Black/Grey

Coarse	Rough
Medium	Medium
Fine	Thin
Very Fine	Very Thin
Ultra Fine	Ultra Thin



Nonwoven Discs And Sheets

Nonwoven	Sheet	Sheet	Unit / Box
A.COARSE	230 x 280	158 x 224	10
A.MED			
A.FINE			
A.V.FINE			
S.MED			
S.FINE			
S.V.FINE			
S.U.FINE			
GREEN			

* It can be produced in the desired size.



Flap Discs




Professional products with long life and high abrasion capacity.

Zirconia alumina cloth

Aggressive zirconia alumina grit.

Ceramic + Multibond

High-grade ceramic mineral with superior performance

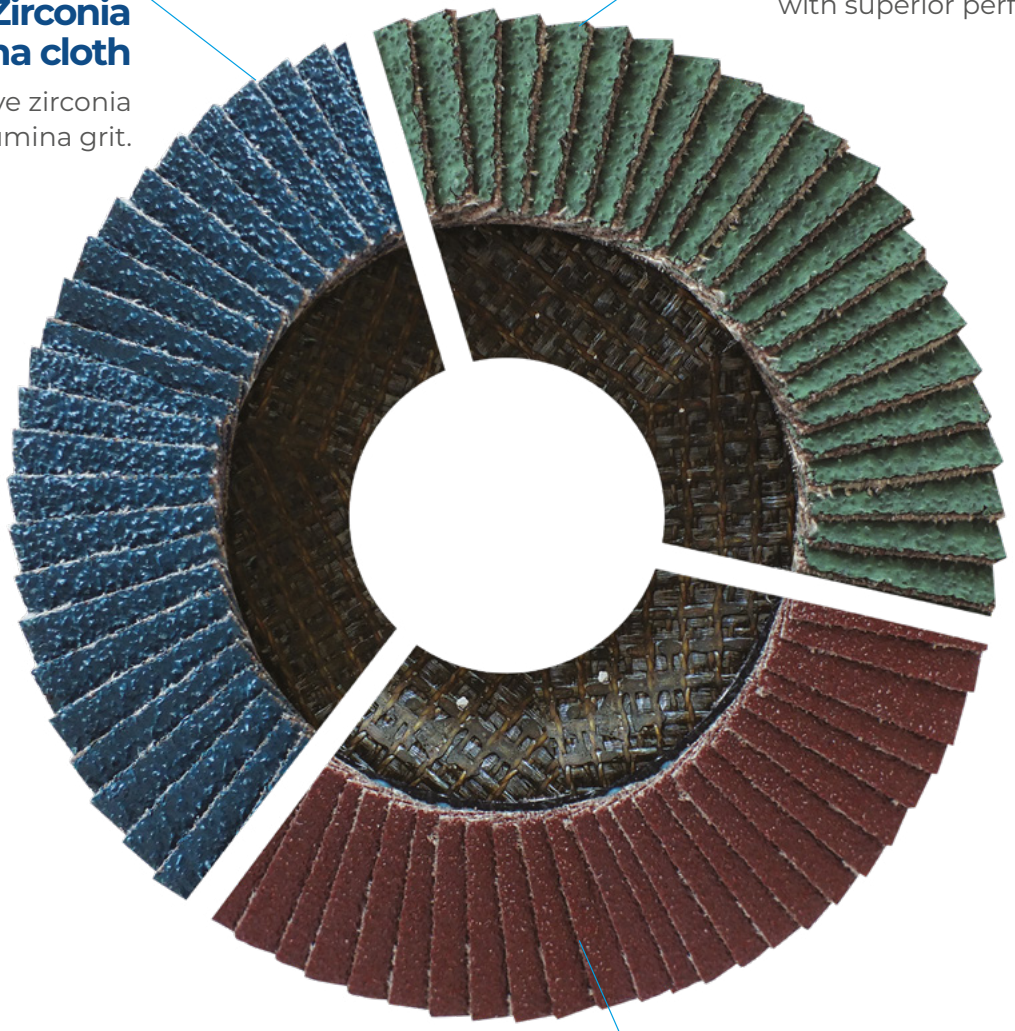

Aluminium Oxide

Durable grit aluminium oxide.

Egebant Alox

Product Features

Ideal for metal surfaces and weld grinding applications.



Applications

- Metal
- Weld

Mineral	Backing	Sizes
Aluminum Oxide	Glass Fiber	115 x 22 125 x 22 180 x 22

Grain
P36
P40
P60
P80
P120

Egebant ZR

General Properties

Ideal for metal surfaces and weld grinding applications.

High stock removal performance thanks to its zirconia mineral.



Applications

- Stainless Steel

Grain	Backing	Sizes
Zirconium	Glass-Fiber	115 x 22 125 x 22 180 x 22

Grain
P36
P40
P60
P80
P120

Egebant ZR Extra

Product Features

It has high abrasiveness and is durable and long-lasting. This product is especially ideal on steel and stainless steel surfaces.



Applications

- Weld
- Deburring
- Metal

Grain	Backing	Sizes
Zirconium	Glass-Fiber	115 x 22 125 x 22 180 x 22

Grain
P36
P40
P60
P80
P120

Egebant SER

Product Features

It is long-lasting, durable, and has a high level of abrasiveness.



Applications

- Stainless Steel
- Weld
- Deburring
- Metal

Grain	Backing	Sizes
Ceramic	Glass Fiber	115 x 22 125 x 22 180 x 22

Grain
P36
P40
P60
P80
P120

Sander Alox

Product Features

Ideal for metal surfaces and weld grinding applications.



Areas of Usage

- Metal
- Weld

Mineral	Backing	Sizes
Aluminum Oxide	Glass Fiber	115 x 22 125 x 22 180 x 22

Grain
P36
P40
P60
P80
P120

Sander ZR

General Properties

Ideal for metal surfaces and weld grinding applications.

High stock removal performance thanks to its zirconia mineral.



Applications

- Stainless Steel

Mineral	Backing	Sizes
Zirconium	Glass Fibre Reinforced	115 x 22 125 x 22 180 x 22

Grain
P36
P40
P60
P80
P120

Radial CSD Disc

Product Features

For scraping paint and varnish, removing rust.

It is suitable for use with angle grinder machine.



Applications

- Fiberglass
- Metal
- Paint
- Plastic

Mineral	Colour	Sizes
Silicon Carbide (SIC)	Black Blue	100 x 16 115 x 22 125 x 22 150 x 22 180 x 22

Radial Nonwoven Disc

Product Features

Non woven flap wheel for angle grinders.



Applications

- Metal

Mineral	Sizes	Grain
Aluminium Oxide Silicon Carbide (SIC)	115 x 20	A. Fine, A. Very Fine, A. Medium, A. Coarse S. Fine, S. Very Fine, S. Ultra Fine

Radial Abrasive Disc

Product Features

It is used for light stock removal without leaving deep lines.

Light stock removal with angle grinders.



Applications

- Metals
- Stainles Steel
- Steel

Mineral	Sizes	Grain
Aluminium Oxide	115 x 22	P60-P400



Quick Change Discs



Product Features

Quick-change abrasive discs designed for efficient surface preparation, cleaning, sanding, blending, deburring, and finishing. The attachment system allows technicians to change compatible discs quickly without replacing the backing pad, making it useful for jobs that require multiple abrasive grades or abrasive types.

Diameter	Mineral	Backing	Grain	Unit / Box
30 mm	Alox, Zirconia, Silicon Carbide, Ceramic, Non-Woven	Cloth, Fiber	P24-P400	100
50 mm	Alox, Zirconia, Silicon Carbide, Ceramic, Non-Woven	Fiber, Nonwoven	P24-P400	
75 mm	Alox, Zirconia, Silicon Carbide, Ceramic, Non-Woven	Fiber, Nonwoven	P24-P400	
100 mm	Alox, Zirconia, Silicon Carbide, Ceramic, Non-Woven	Fiber, Nonwoven	P24-P400	

Drum Abrasives

Product Features

It is suitable for use in processes such as surface development and deburring. It has a wide application area thanks to different grit sizes and sandpaper options.

Used for grinding finishing deburring an metal, wood and various materials.



Mineral	Diameter	Grain
Aluminium Oxide Silicon Carbide (SIC) Ceramic Zirconium	10 12 15 20 30 40 50 60 76	P24 P800

Cartridge Rolls



Product Features

Cartridge rolls are ideal for getting into small, hard to reach spaces. As they wear, the wrapped layers of the cartridge roll continually expose fresh abrasive layers for continued cutting action. Available in regular and tapered construction.

Mineral	Size	Form	Grain
Aluminium Oxide	10x40	Cylindrical	P40-P600
Silicon Carbide (SIC)	12x40	Cylindrical	P40-P600
Ceramic	15x40	Cylindrical	P40-P600
Zirconium	8x14x40	Conical	P40-P600

Notes

egebant®

www.egebant.com.tr

egebant®

Headquarter
TOSB 3. Cadde No: 23, Postal Code: 41420,
Sekerpinar, Cayirova / Kocaeli, Turkey
T: +90 262 679 1313
F: +90 262 679 1300
E: info@egebant.com.tr

www.egebant.com.tr

/egebant /egebantcom /Egebant /Egebant /EgebantComTr